

Arne Domus

Santa & Cole Team, 2015 Pendant lamp




LIGHT SOURCE

Light source included (adjustable). COB LEDs module Power system: 33 W Operating current: 700 mA T^a Colour : 2.700 K Typical CRI: 90 Lifetime: 40.000 h Built-in adjustable LED. Suitable for dimming 1-10V. (Not included external dimmer switch 1-10V). Energy efficiency class (E.E.C): A⁺⁺... A. Suitable for indoor and outdoor use (CE market). Input voltaje: 90 \sim 305 Vac. (50 Hz / 60 Hz). According to destination.

APPROXIMATE WEIGHT (unpacked)

6,2 kg / 13.6 lb



An extraordinarily elegant light for the home, suitable for use indoors and outdoors, with a perfectly-arranged aluminium injection body housing stateof-the-art LED technology in a single circular plate, shielded from watching eyes by an opaline diffuser. Simple and colourful, it humbly honours the best spirit of Danish design.

GENERAL DESCRIPTION

Matte metal structure with 4 colour options: S&C white, aluminium grey, dark green, and mustard. Acid-etched and tempered glass diffusor. Circular metal canopy with power supply incorporated. Suitable for Junction Box (UL market). Electric cable length: 4 m / 157.5"









Aluminium grey

Mustard

REGULATIONS


CE
IP 54
UNE-EN 60598
UNE-EN 55015
UNE-EN 60529
UNE-EN 62031
UNE-EN 61000-3-2
UNE-EN 61347-2-13

c(USA) Class 2 (USA) Non-class 2 (CAN) Dry and damp location UL-1598 UL-8750 E-336377

MAINTENANCE

Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

MODEL

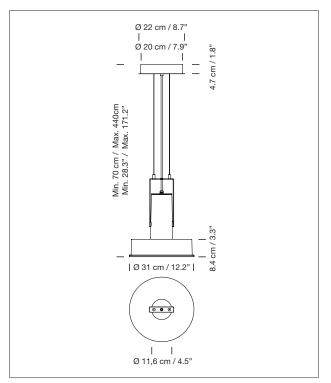

OTHERS

The lamp are delivered in one package. The assembly instructions are delivered with the product.