


CONTENTS


Desk Lamp




Finial Cap

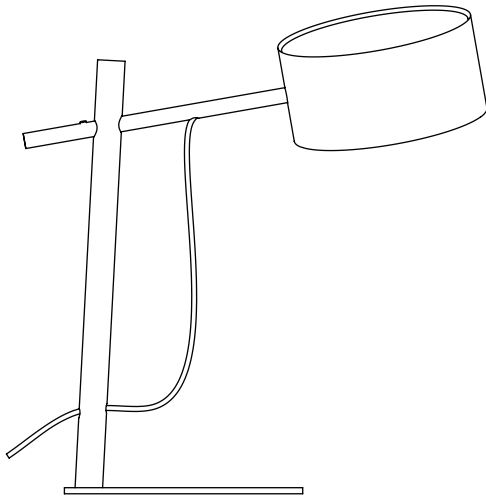

Shade Bracket



Top Diffuser



SAFETY INFORMATION

Only one light bulb per socket.

Only suitable for direct mounting on non-combustible surfaces.

Under no circumstances can Excel fixtures be mounted on normally flammable surfaces.

Suitable for dry, indoor use only.

Maximum ambient temperature: 25° C

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by Roll & Hill or Roll & Hill's service agent or a similarly qualified person in order to avoid hazard.

EXCEL DESK LAMP | ASSEMBLY

Note: Do not use bulbs that exceed 60 watts.

1. Install light bulb (D). Light bulbs provided by customer.
2. Place bracket (C) onto existing shade bracket so that both form a cross.
3. Place metal diffuser (B) on top of brackets and affix by screwing down finial cap (A).

