

- ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN.
INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.
SUITABLE FOR DRY LOCATIONS ONLY
TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.
- FR ATTENTION – RISQUE D’INCENDIE, RISQUE DE CHOC.
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D’INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.
POUR EMPLACEMENTS SECS SEULEMENT
COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L’INSTALLATION.
1. Prepare the fitting for installation- consulting the instructions and diagrams on the inside page. Once desired drop of pendant is established, the cable length may be shortened. If cable is desired length already, then skip to instruction point number 3.

2. To shorten cable:-

a. Establish required length of cable (ensuring there is some slack) before using wire cutters to cut.

b. Remove the outer insulation from the last 6” of the end of the cable, then remove the last 1/4” of inner sleeving from both cables to expose the wire.


c. Make sure that when stripping the outer cable no damage occurs to the interior cable.

3. This fitting should be installed on a 4” junction box (not supplied).

4. Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth (ground) terminals.

5. Attach the fixing plate to your junction box using the two existing bolts.

6. In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire should be terminated inside the junction box (do not connect to fitting).

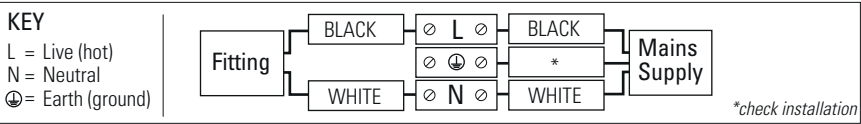

7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. See hanging instructions inside to complete the installation.
9. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
10. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information


Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Bone china can be cleaned using a soft damp cloth or with a suitable mild (non-abrasive) detergent. Switch off power to the fitting before cleaning.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

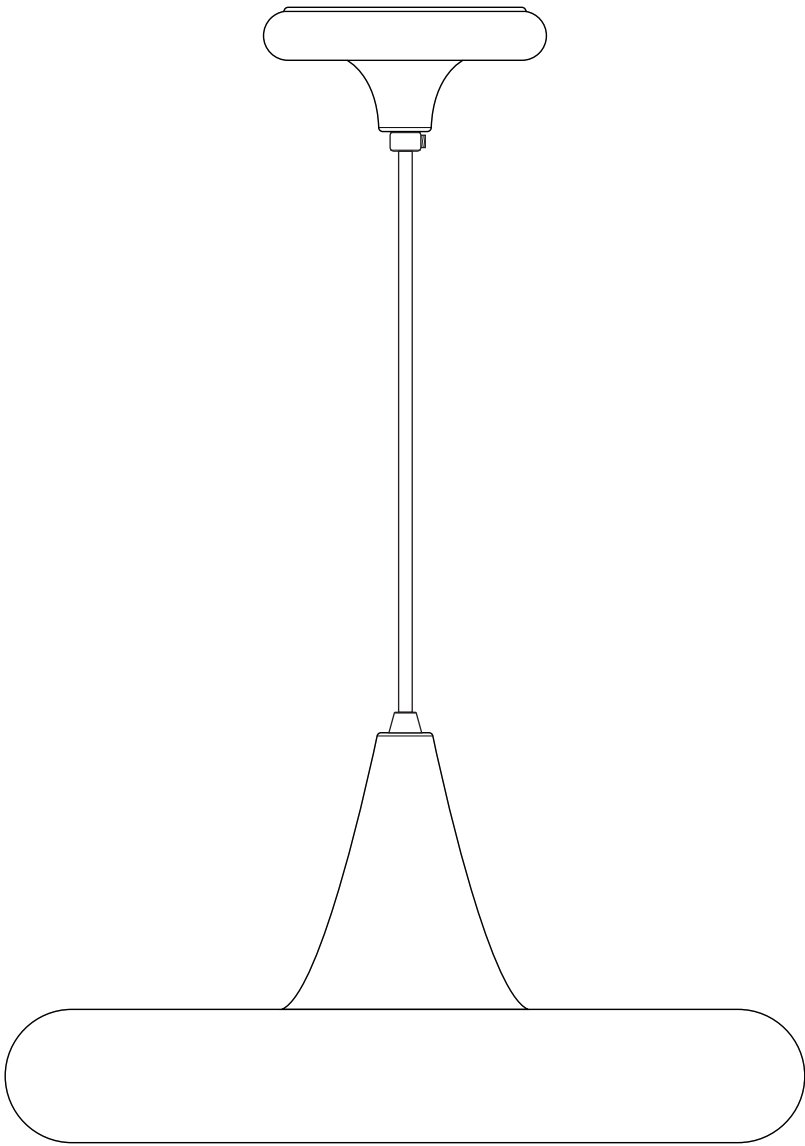


ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Drop Pendant Light

| 120V ac 60Hz | IP20 |

US-FP333NM Drop Three Pendant, Natural Matt

LAMP GUIDANCE US Drop Three Pendant					
BASE	SHAPE		TYPE*		WATTAGE**
 E26	 A	 BALL	INCANDESCENT	✓	60W MAX
			CFL	✓	11W
			ECO-HALOGEN	✗	n/a
			LED	✓	7W
* Warm white (2700k) low energy lamps recommended.					
** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.					

Contents

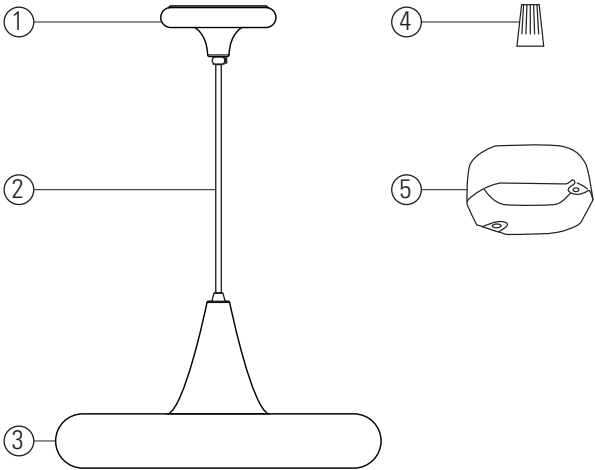

1 Ceiling Rose
2 Luminaire Flex
3 Shade

4 Wire Nuts*
5 Junction Box*

Contents

- 1 Ceiling Rose
- 2 Luminaire Flex
- 3 Shade

Tools/Hardware Required

- 4 Wire Nuts*
- 5 Junction Box*
- Cross head screwdriver*
- Small flat-head screwdriver*

* *Not Supplied*


Installation Instructions

This product is made from fine bone china; take care when handling the shade during installation and ensure hands are clean to avoid marking the surface. Refer to the diagram opposite & the instructions on the reverse.

- Determine the desired drop of the fitting. Shorten the cable if necessary, following step 2 overleaf.
- Screw the fixing strap (E) to the junction box (A) using the junction box screws (F).
- Make the connections inside the junction box using UL-approved wire nuts (C). Refer to step 6 overleaf.
- Push the ceiling rose (G) flush to the mounting surface and secure it in place by tightening the grub screw on the cord grip (H). Take care not to overtighten the grub screw and ensure at least 1/4" of supplemental clear sleeving is between the grub screw and the cord grip.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation Diagram

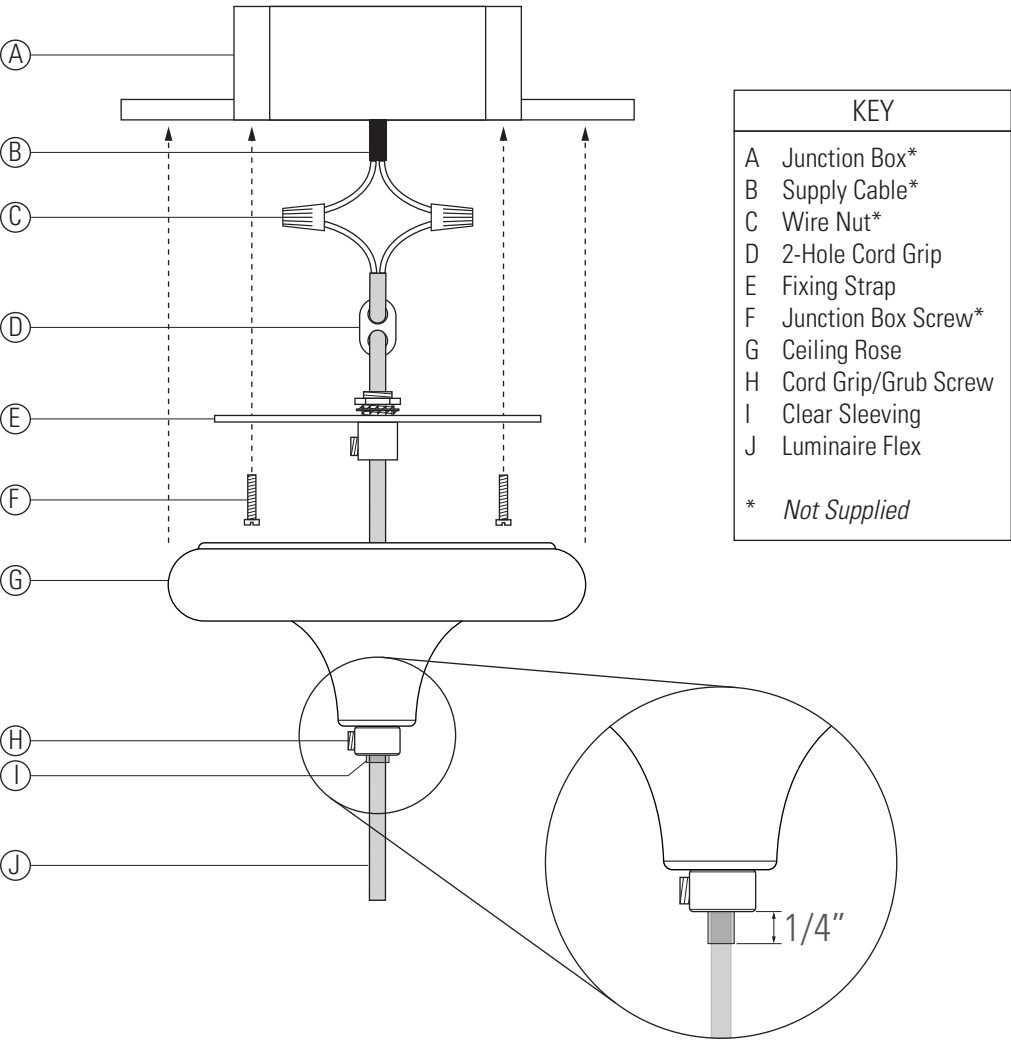

Please maintain all supplementary insulation through cable entry points. If you shorten the cable slide the clear sleeving along the flex and ensure it is in place between the brass cord grip and the cable when the grub screw is tightened.