

Safety & Installation Instructions

v2.0-01.20

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.

SUITABLE FOR DRY LOCATIONS ONLY

THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.

FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.


POUR EMPLACEMENT SECS SEULEMENT

L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.

1. Prepare the fitting for installation- consulting the instructions and diagrams on the inside page. Once desired drop of pendant is established, the cable length may be shortened. If cable is desired length already, then skip to instruction point number 3.
2. To shorten cable:-
 - a. Establish required length of cable (ensuring there is some slack) before using wire cutters to cut.
 - b. Remove the outer insulation from the last 6" of the end of the cable, then remove the last 1/4" of inner sleeving from both cables to expose the wire.
 - c. Make sure that when stripping the outer cable no damage occurs to the interior cable.
3. This fitting should be installed on a 4" junction box (not supplied).
4. Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth (ground) terminals.
5. Attach the fixing plate to your junction box using the two existing bolts.
6. In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire to the ground terminal or green/yellow wire connected to the fitting.

KEY

L = Live (hot)
N = Neutral
⊕ = Earth (ground)



**check installation*

7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. See hanging instructions inside to complete the installation.
9. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
10. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Bone china can be cleaned by hand using a soft damp cloth, or with a diluted mild (non-abrasive) detergent if necessary. Switch off power to the fitting before cleaning.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes.

All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM

+44 (0)1993 882 251


UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Hatton Grouping Pendant Light

Instruction Manual

US-FP548
Hatton 1

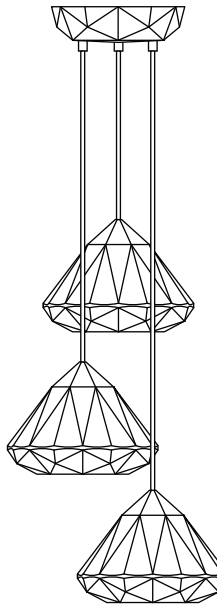

US-FP556
Hatton 3

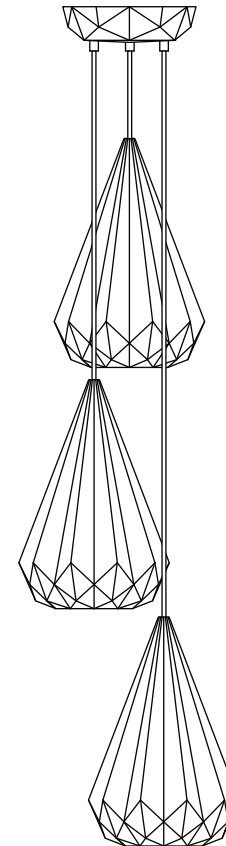





ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON - NEW YORK - PARIS



Hatton Grouping Pendant Light


| 120V ac 60Hz | IP20 |

US-FP548 Hatton 1 grouping
US-FP556 Hatton 3 grouping

LAMP GUIDANCE			
BASE	SHAPE	TYPE*	WATTAGE**
 E26		INCANDESCENT ✓	US-FP556
		CFL ✓	3x 60W MAX
		ECO-HALOGEN ✓	3 x 13W
		LED ✓	3 x 42W
			3 x 9W
 E26		INCANDESCENT ✓	US - FP548
		CFL ✓	3x 60W MAX
		ECO-HALOGEN ✓	3 x 13W
		LED ✓	3 x 42W
			3 x 9W

* Warm white (2700k) low energy lamps recommended.
** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Contents

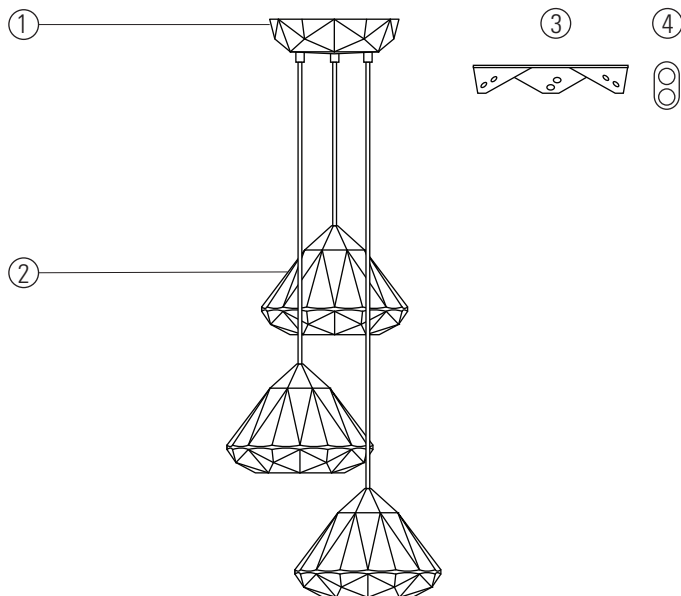

Contents


- 1 Ceiling Rose
- 2 3 x Shade
- 3 1 x Ceiling plate
- 4 3 x 2-hole cord grip

Tools Required

- Cross head screwdriver
- Small flat-head screwdriver
- Drill (if holes are required)
- Junction Box
- Wire Nuts

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Installation Diagram

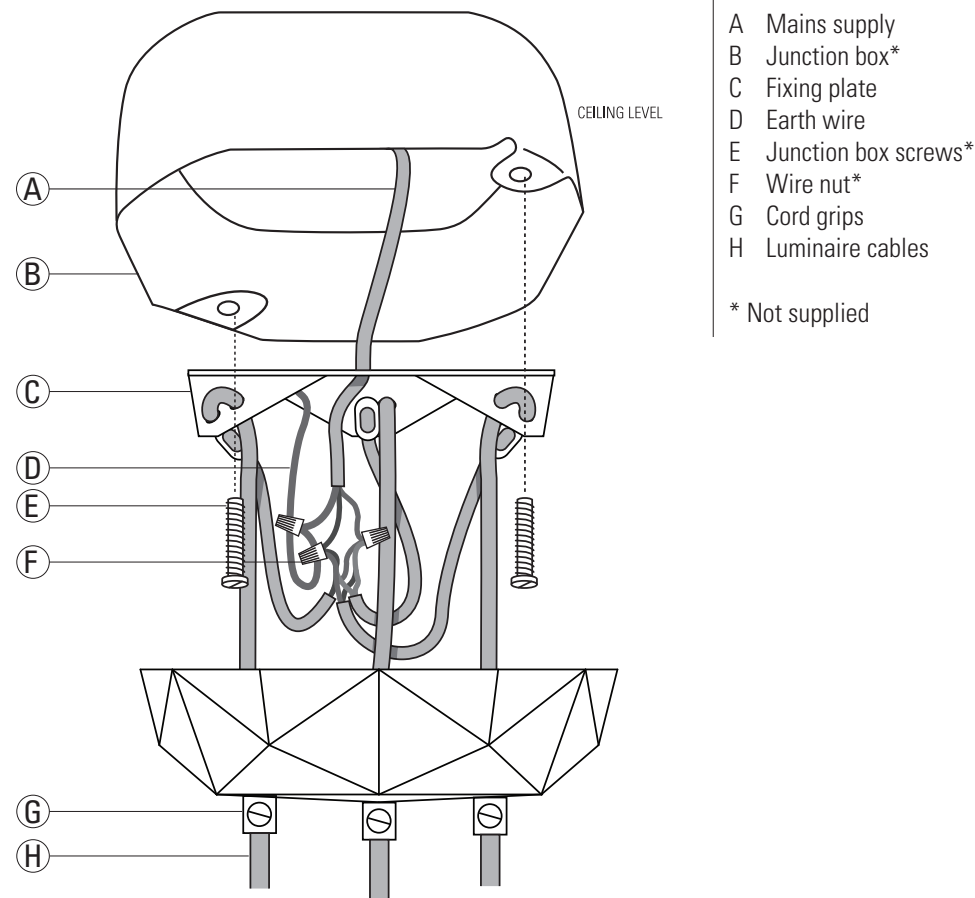

- A Mains supply
 - B Junction box*
 - C Fixing plate
 - D Earth wire
 - E Junction box screws*
 - F Wire nut*
 - G Cord grips
 - H Luminaire cables
- * Not supplied

Hanging Instructions

Refer to the diagram above.

Take care when handling ceramic products during installation.

- Determine the required drop of the fitting and adjust flex (J) length as necessary, following point 2 overleaf.
- Screw the ceiling plate (C) to the junction box using the junction box screws.
- Before wiring, ensure the luminaire flex (H) is threaded in and out of the holes in the 'wings' of the ceiling plate (C) as shown below.
- Make connection to the mains supply (follow instructions over leaf), using wire nuts (F).
- The ceiling rose can now be pushed up over the bracket and the connection: Loosen the screw on each cord grip (G) before pushing the ceiling rose up so that it sits flush against the ceiling, then tighten the grub screw to hold the ceiling rose in position. Do not overtighten grub screw.