

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.

SUITABLE FOR DAMP LOCATIONS

THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.


FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

CONVIENT AUX EMPLACEMENTS HUMIDES

L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.

- 1 Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
- 2 If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live (hot), neutral and earth (ground) terminals.
- 3 Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
- 4 Position the light where desired ensuring that there is access to a suitable junction box for the fixture and suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.
 - a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.
 - b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.
 - c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings.
- 5 This fitting is supplied unwired. Connect the main supply from your junction box directly to the terminals inside the luminaire. Open your junction box and connect the live (hot) black wire to the live terminal and the neutral white wire to the neutral terminal. Connect the bare copper or green/yellow ground wire to the crimped terminal on the backplate.

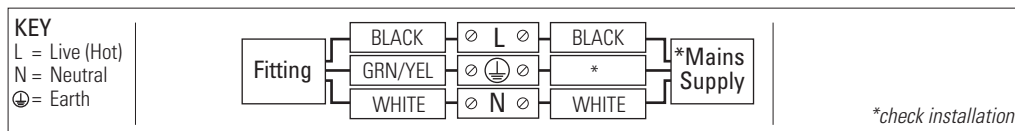

- 6 Support the fitting so that no strain is applied to the wiring when making the electrical connections.
- 7 Double check all the connections are secure, no wires are trapped behind or within the fitting and complete the installation, screwing the fitting to the wall, over your junction box.
- 8 Fit the correct type and wattage of bulb, referring to guidance inside. Do not overtighten bulb.
- 9 Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Switch off power to the fitting before cleaning.


Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes.

All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM



+44 (0)1993 882 251

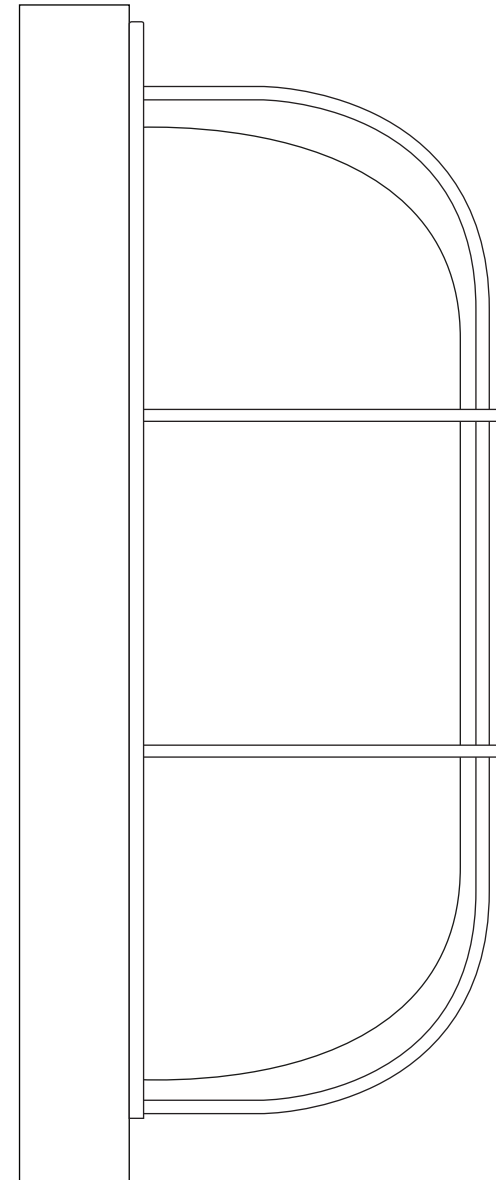UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Marine Mast Light

US-DP7001/7003 | 120V ac 60Hz | IP54

LAMP GUIDANCE			
BASE	SHAPE	TYPE*	WATTAGE**
E26	 A	INCANDESCENT ✓	60W MAX
		CFL ✓	15W
		ECO-HALOGEN ✗	n/a
		LED ✓	12W
	 BALL		

* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Contents

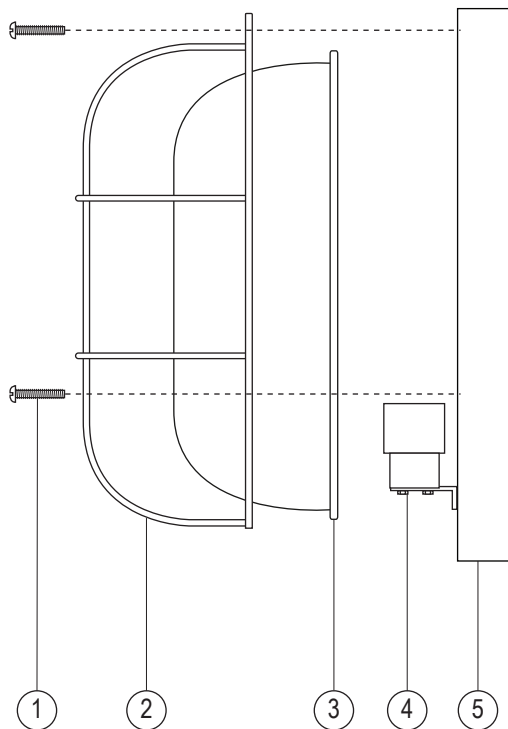

Contents

- 1 - Screws
- 2 - Galvanised Guard
- 3 - Prismatic Glass
- 4 - E26 Lampholder
- 5 - Backplate
- 6 - 3 x Clips (7001 Only)

6



Guard for 7003 version only, clips replace guard in 7001 version to retain the glass.


Tools/Hardware required

- 7 - UL approved wire nuts
- 8 - Junction box
- Screwdriver, flat-head


7




8



Installation Diagram

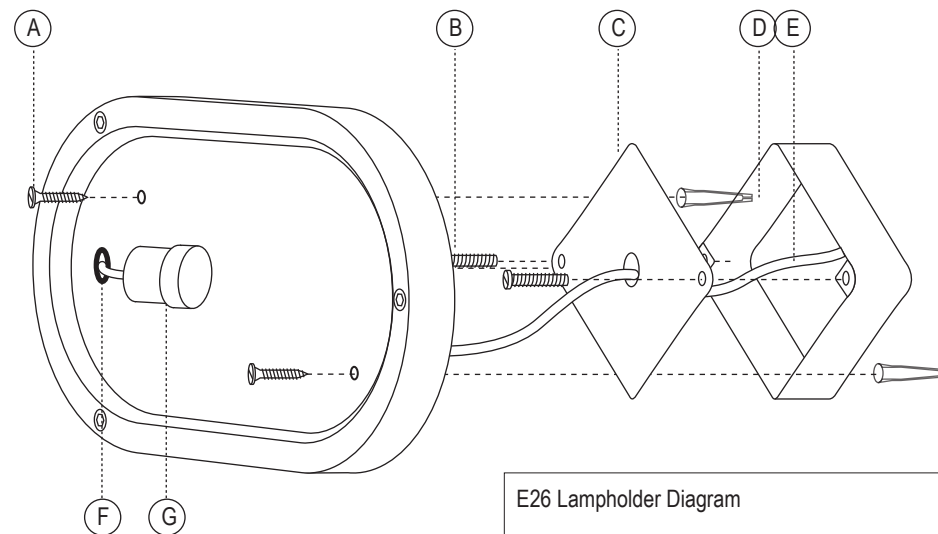

E26 Lampholder Diagram

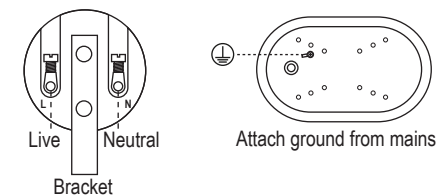

- | | | | |
|---|----------------------|---|-------------------|
| A | FIXING SCREWS | E | MAINS SUPPLY |
| B | JUNCTION BOX SCREWS* | F | CABLE ENTRY GLAND |
| C | JUNCTION BOX COVER* | G | LAMPHOLDER |
| D | JUNCTION BOX* | | |
- *EXISTING

Assembly Instructions

This fitting comes unwired. The lampholder will require wiring into main supply.

Remove guard or clips to remove glass, then follow the instructions overleaf to install light fitting. Holes for fixing the fitting to the wall must be drilled into the backplate. Drill these before marking and drilling the wall (see point 4 overleaf).

Having completed installation, screw guard/clips to base plate to support glass. DO NOT OVERTIGHTEN.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT