

## Pole

## 05 - Surface to Surface - 3 Sections - 120V

### Series

Pole

**Product**  
 05 - Surface to Surface - 3 Sections - 120V

Dimensions	A	B
Min.	92in / 234cm	69in / 175cm
Preferred	97in / 246cm	67in / 170cm
Max.	102in / 259cm	66in / 168cm

**Weight**  
 5lb/2.3kg

**Materials**  
 Aluminum, stainless steel, silicone


**Metal Finishes**  
 Black

**Large Mount**  
 L 5.1in/13cm x W 5.1in/13cm x  
 H 0.4in/10cm cylindrical plate in  
 matching metal finish

**Small Mount**  
 L 1.8in/45cm x W 1.8in/45cm x  
 H 0.3in/7cm cylindrical plate in  
 matching metal finish

**Certifications**  
 UL, cUL (120V)

**120V Illumination**  
 Integrated LED  
 Wattage: 8 Watts  
 Lumens: 300 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours  
 Dimming: TRIAC, Electronic Low Voltage (ELV), 0-10V

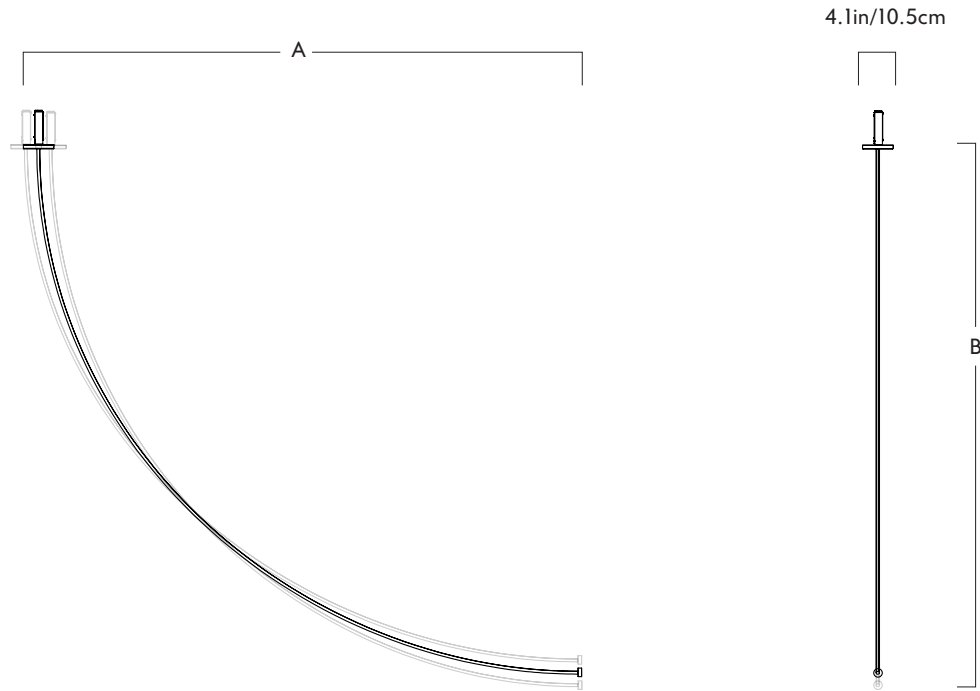

## Pole

## 05 - Surface to Surface - 3 Sections - 240V

### Series

Pole

### Product

05 - Surface to Surface - 4 Sections - 240V

### Dimensions

	A	B
Min.	92in / 234cm	69in / 175cm
Preferred	97in / 246cm	67in / 170cm
Max.	102in / 259cm	66in / 168cm

### Weight

6.9lb/3.1kg

### Materials

Aluminum, stainless steel, silicone

### Metal Finishes

Black

### Large Mount

L 4.1in/10.5cm x W 4.1in/10.5cm x H 0.4in/10cm cylindrical plate in matching metal finish.

### Small Mount

L 1.8in/45cm x W 1.8in/45cm x H 0.3in/7cm cylindrical plate in matching metal finish

### Driver Box (240V Only)

240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

### Certification

CE (240V)

### 240V Illumination

Integrated LED


Wattage: 8 Watts

Lumens: 300 Lumens

Color Temperature: 2700K, 90CRI

LED Lifetime: 70,000 Hours

Dimming: Electronic Low Voltage (ELV), 0-10V

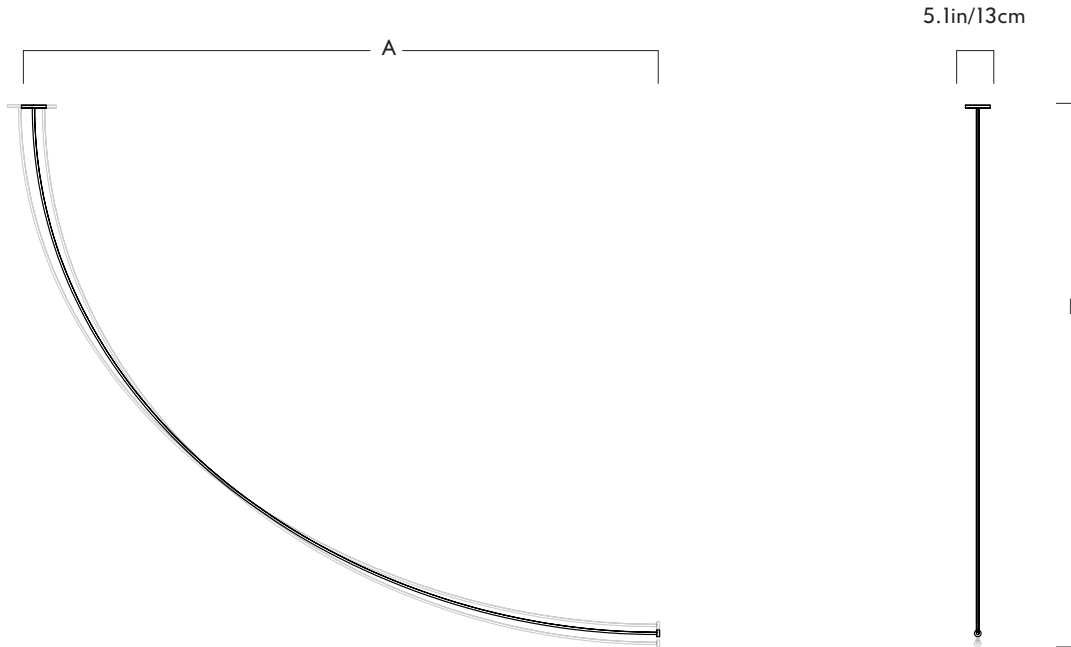

## Pole

## 05 - Surface to Surface - 4 Sections - 120V

### Series

Pole

**Product**  
 05 - Surface to Surface - 4 Sections - 120V

Dimensions	A	B
Min.	92in / 234cm	69in / 175cm
Preferred	97in / 246cm	67in / 170cm
Max.	102in / 259cm	66in / 168cm

**Weight**  
 5lb/2.3kg

**Materials**  
 Aluminum, stainless steel, silicone


**Metal Finishes**  
 Black

**Large Mount**  
 L 5.1in/13cm x W 5.1in/13cm x  
 H 0.4in/10cm cylindrical plate in  
 matching metal finish

**Small Mount**  
 L 1.8in/45cm x W 1.8in/45cm x  
 H 0.3in/7cm cylindrical plate in  
 matching metal finish

**Certifications**  
 UL, cUL (120V)

**120V Illumination**  
 Integrated LED  
 Wattage: 10 Watts  
 Lumens: 400 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours  
 Dimming: TRIAC, Electronic Low Voltage (ELV), 0-10V

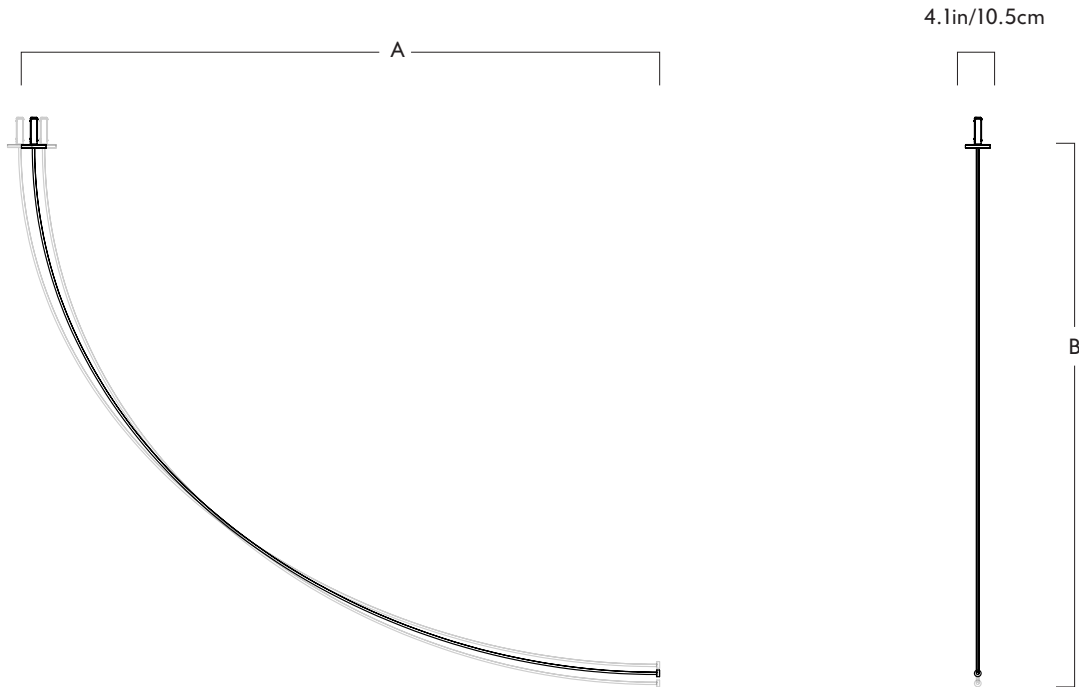

## Pole

## 05 - Surface to Surface - 4 Sections - 240V

Series  
Pole

Product  
05 - Surface to Surface - 4 Sections - 240V

Dimensions

	A	B
Min.	92in / 234cm	69in / 175cm
Preferred	97in / 246cm	67in / 170cm
Max.	102in / 259cm	66in / 168cm

Weight  
6.9lb/3.1kg

Materials

Aluminum, stainless steel, silicone

Metal Finishes

Black

Large Mount

L 4.1in/10.5cm x W 4.1in/10.5cm x H 0.4in/10cm cylindrical plate in matching metal finish.

Small Mount

L 1.8in/45cm x W 1.8in/45cm x H 0.3in/7cm cylindrical plate in matching metal finish

Driver Box (240V Only)


240V version includes box to house drivers. Dimensions are L 1.2in/3cm x W 2.9in/7.5cm x H 4.5in/11.5cm

Certification

CE (240V)

240V Illumination

Integrated LED  
 Wattage: 10 Watts  
 Lumens: 400 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours  
 Dimming: Electronic Low Voltage (ELV), 0-10V

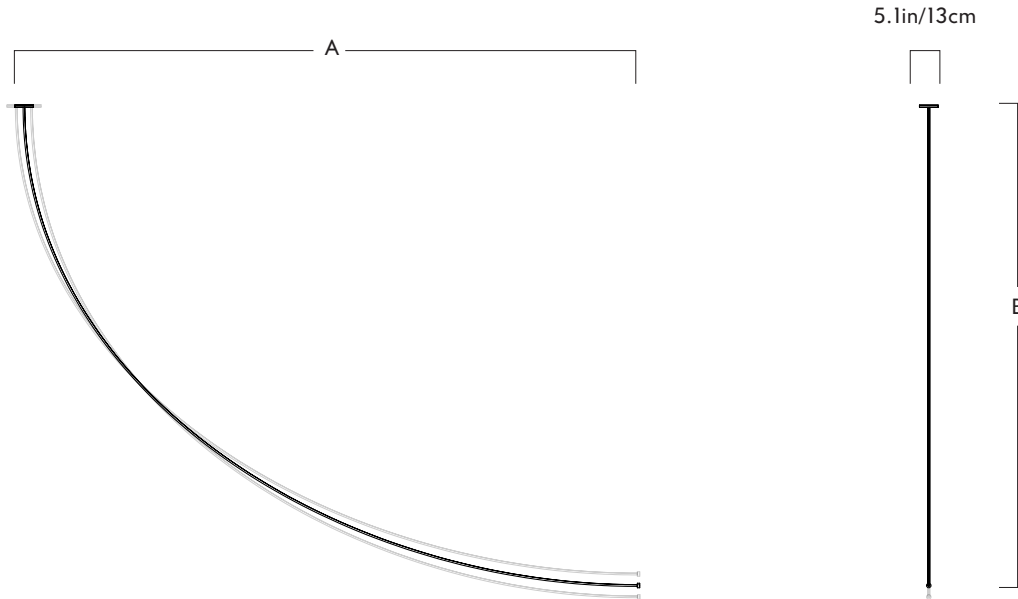

## Pole

## 05 - Surface to Surface - 5 Sections - 120V

Series  
Pole

Materials  
Aluminum, stainless steel, silicone

120V Illumination  
Integrated LED  
Wattage: 13 Watts  
Lumens: 500 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours  
Dimming: TRIAC, Electronic Low Voltage (ELV), 0-10V

Product  
05 - Surface to Surface - 5 Sections - 120V

Metal Finishes  
Black


<u>Dimensions</u>	A	B
Min.	115in / 292cm	86in / 218cm
Preferred	125in / 317cm	82in / 208cm
Max.	136in / 345cm	79in / 201cm

Large Mount  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Weight  
5.6lb/2.5kg

Small Mount  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Certifications  
UL, cUL (120V)

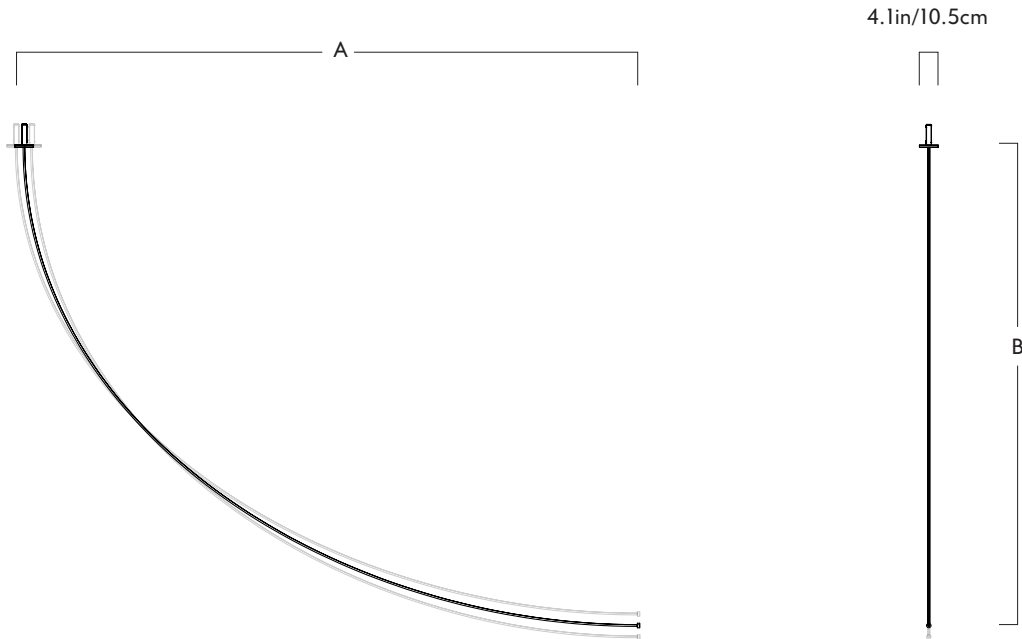

## Pole

## 05 - Surface to Surface - 5 Sections - 240V

Series  
Pole

Materials  
Aluminum, stainless steel, silicone

240V Illumination  
Integrated LED  
Wattage: 13 Watts  
Lumens: 500 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours  
Dimming: Electronic Low Voltage (ELV), 0-10V

Product  
05 - Surface to Surface - 5 Sections - 240V

Metal Finishes  
Black

<u>Dimensions</u>	A	B
Min.	115in / 292cm	86in / 218cm
Preferred	125in / 317cm	82in / 208cm
Max.	136in / 345cm	79in / 201cm


Large Mount  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Small Mount  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Weight  
7.5lb/43.4kg

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

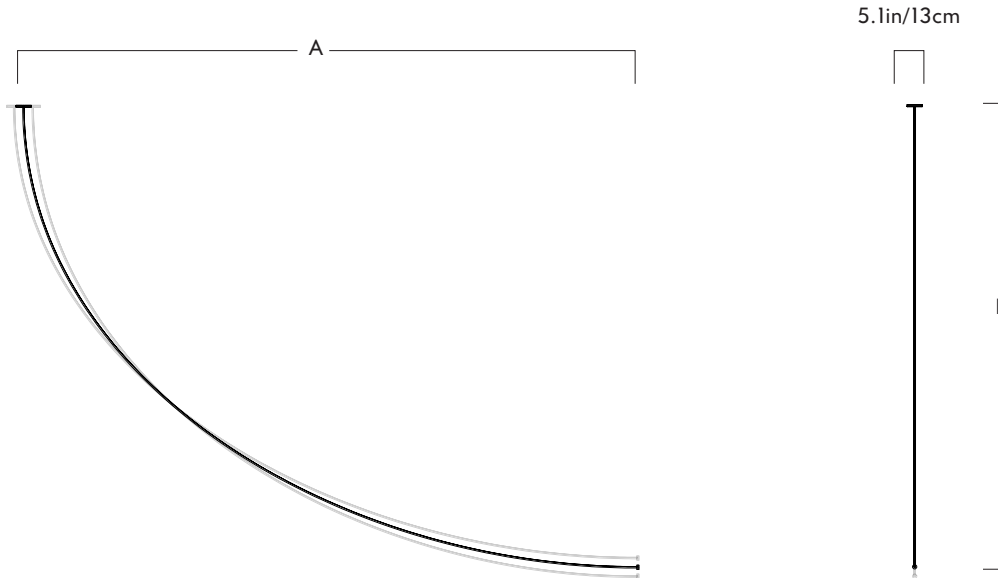

## Pole

## 05 - Surface to Surface - 6 Sections - 120V

Series  
Pole

Materials  
Aluminum, stainless steel, silicone

120V Illumination  
Integrated LED  
Wattage: 15 Watts  
Lumens: 600 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours  
Dimming: TRIAC, Electronic Low Voltage (ELV), 0-10V

Product  
05 - Surface to Surface - 6 Sections - 120V

Metal Finishes  
Black


<u>Dimensions</u>	A	B
Min.	140in / 356cm	103in / 262cm
Prefered	157in / 399cm	97in / 246cm
Max.	175in / 445cm	91in / 231cm

Large Mount  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Weight  
6.2lb/2.8kg

Small Mount  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Certifications  
UL, cUL (120V)

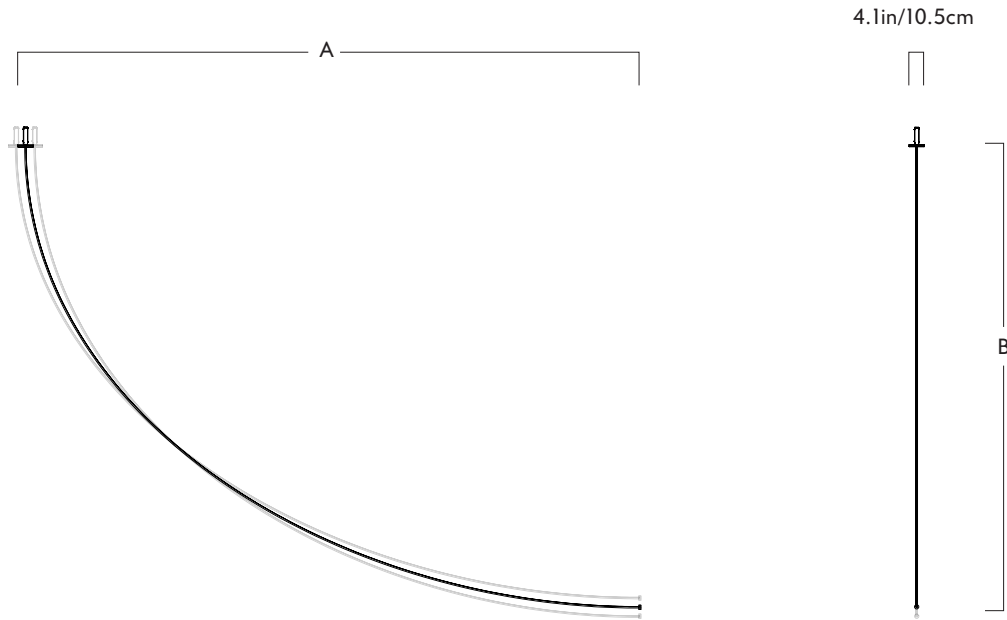

## Pole

## 05 - Surface to Surface - 6 Sections - 240V

Series  
Pole

Materials  
Aluminum, stainless steel, silicone

240V Illumination  
 Integrated LED  
 Wattage: 15 Watts  
 Lumens: 600 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours  
 Dimming: Electronic Low Voltage (ELV), 0-10V

Product  
05 - Surface to Surface - 6 Sections - 240V

Metal Finishes  
Black

<u>Dimensions</u>	A	B
Min.	140in / 356cm	103in / 262cm
Prefered	157in / 399cm	97in / 246cm
Max.	175in / 445cm	91in / 231cm

Large Mount  
 L 4.1in/10.5cm x W 4.1in/10.5cm x  
 H 0.4in/10cm cylindrical plate in  
 matching metal finish.


Small Mount  
 L 1.8in/45cm x W 1.8in/45cm x  
 H 0.3in/7cm cylindrical plate in  
 matching metal finish

Weight  
8.1lb/3.7kg

Driver Box (240V Only)  
 240V version includes box to house  
 drivers. Dimensions are L 1.2in/3cm x W  
 2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)



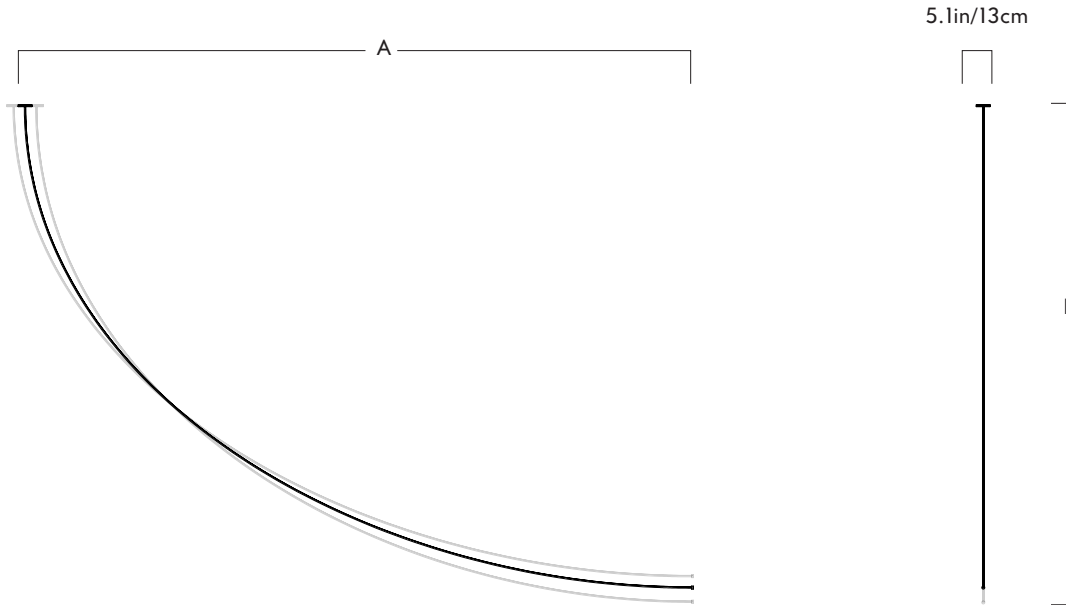

## Pole

## 05 - Surface to Surface - 7 Sections - 120V

### Series

Pole

**Materials**  
 Aluminum, stainless steel, silicone

**120V Illumination**  
 Integrated LED  
 Wattage: 18 Watts  
 Lumens: 700 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours  
 Dimming: TRIAC, Electronic Low Voltage (ELV), 0-10V

**Product**  
 05 - Surface to Surface - 7 Sections - 120V

**Metal Finishes**  
 Black


Dimensions	A	B
Min.	170in / 432cm	119in / 302cm
Prefered	191in / 485cm	110in / 279cm
Max.	212in / 538cm	101in / 256cm

**Large Mount**  
 L 5.1in/13cm x W 5.1in/13cm x  
 H 0.4in/10cm cylindrical plate in  
 matching metal finish

**Small Mount**  
 L 1.8in/45cm x W 1.8in/45cm x  
 H 0.3in/7cm cylindrical plate in  
 matching metal finish

**Weight**  
 6.8lb/3.1kg

**Certifications**  
 UL, cUL (120V)

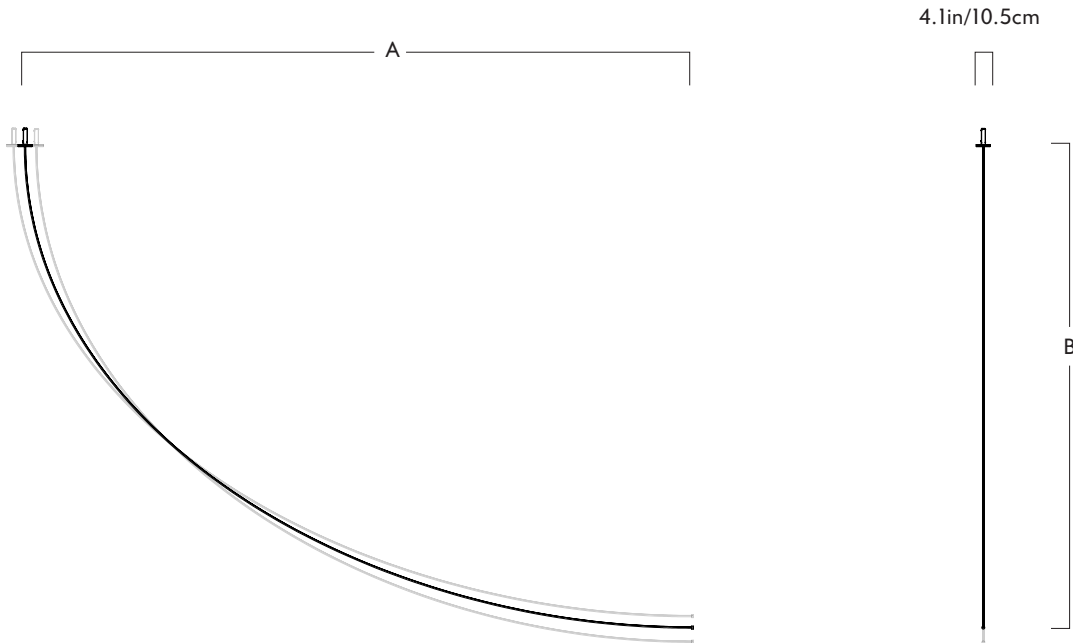

## Pole

## 05 - Surface to Surface - 7 Sections - 240V

### Series

Pole

**Materials**  
 Aluminum, stainless steel, silicone

**240V Illumination**  
 Integrated LED  
 Wattage: 18 Watts  
 Lumens: 700 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours  
 Dimming: Electronic Low Voltage (ELV), 0-10V

**Product**  
 05 - Surface to Surface - 7 Sections - 240V

**Metal Finishes**  
 Black

Dimensions	A	B
Min.	170in / 432cm	119in / 302cm
Preferred	191in / 485cm	110in / 279cm
Max.	212in / 538cm	101in / 256cm


**Large Mount**  
 L 4.1in/10.5cm x W 4.1in/10.5cm x  
 H 0.4in/10cm cylindrical plate in  
 matching metal finish.

**Weight**  
 8.7lb/3.9kg

**Small Mount**  
 L 1.8in/45cm x W 1.8in/45cm x  
 H 0.3in/7cm cylindrical plate in  
 matching metal finish

**Driver Box (240V Only)**  
 240V version includes box to house  
 drivers. Dimensions are L 1.2in/3cm x W  
 2.9in/7.5cm x H 4.5in/11.5cm

**Certification**  
 CE (240V)

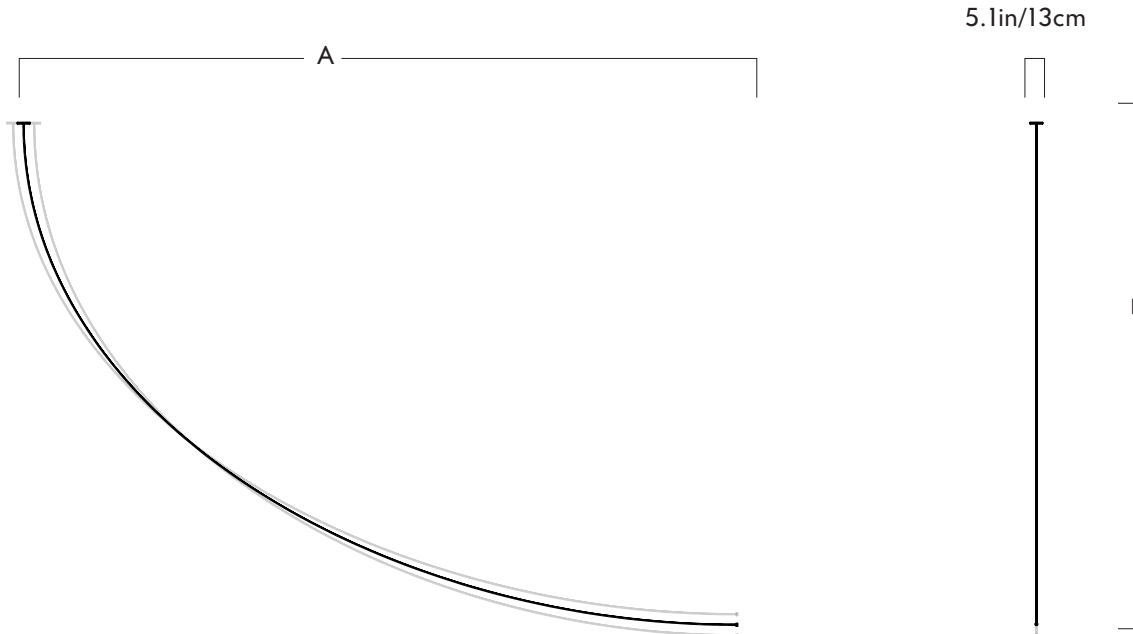

## Pole

## 05 - Surface to Surface - 8 Sections - 120V

Series  
Pole

Materials  
Aluminum, stainless steel, silicone

120V Illumination  
Integrated LED  
Wattage: 20 Watts  
Lumens: 800 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours  
Dimming: TRIAC, Electronic Low Voltage (ELV), 0-10V

Product  
05 - Surface to Surface - 8 Sections - 120V

Metal Finishes  
Black


<u>Dimensions</u>	A	B
Min.	195in / 495cm	134in / 340cm
Preferred	222in / 564cm	123in / 312cm
Max.	250in / 635cm	112in / 184cm

Large Mount  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Weight  
7.4lb/3.4kg

Small Mount  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Certifications  
UL, cUL (120V)

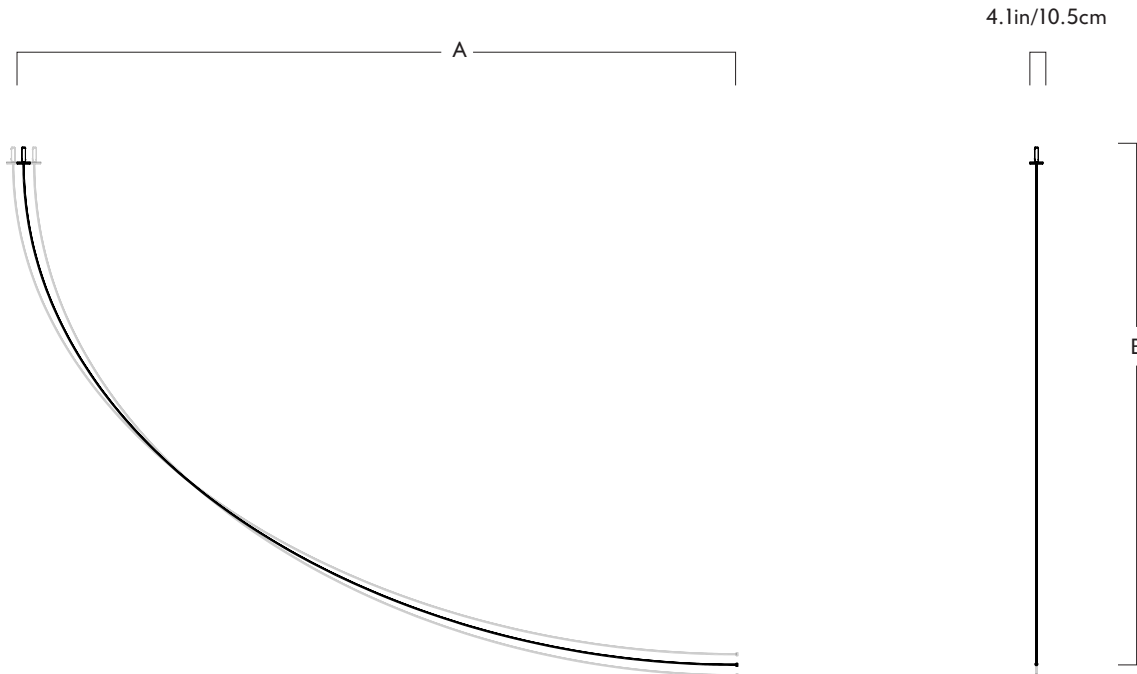

## Pole

## 05 - Surface to Surface - 8 Sections - 240V

Series  
Pole

Product  
05 - Surface to Surface - 8 Sections - 240V

Dimensions

	A	B
Min.	195in / 495cm	134in / 340cm
Preferred	222in / 564cm	123in / 312cm
Max.	250in / 635cm	112in / 184cm

Weight  
9.3lb/4.2kg

Materials  
Aluminum, stainless steel, silicone

Metal Finishes  
Black

Large Mount  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Small Mount  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

240V Illumination  
Integrated LED  
Wattage: 20 Watts  
Lumens: 800 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours  
Dimming: Electronic Low Voltage (ELV),  
0-10V