


ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS. SUITABLE FOR DAMP LOCATIONS. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.

FR ATTENTION – RISQUE D’INCENDIE, RISQUE DE CHOC. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D’INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMBLACEMENTS HUMIDES. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L’INSTALLATION.

1. If you are in any doubt consult a qualified electrician as to the installation of the fitting. Install in accordance with current NEC wiring regulations. It is recommended that this fitting is installed by a qualified electrician.
2. Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
3. If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth terminals.
4. Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
5. Position the light where desired ensuring that there is access to a suitable junction box for the fixture.
6. Using your existing junction box, use a screwdriver to open the junction box. Keep the two existing screws. This fitting should be installed on a 4” junction box (not supplied).
7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. Electrical connection: this is a low voltage fitting which does not require grounding. Terminate the ground wire inside the junction box. This fitting **MUST** be connected to the supplied 12V constant current LED driver **BEFORE** installing on a mains voltage (120V) circuit. Make the connections as shown in the diagram below:




9. Determine the fixing method appropriate to the walls construction. Mark and prepare holes as described below:
  - a. Plaster or Panelled: Locate a wooden beam or joist above the plaster or panel. Drill a pilot hole through the plaster or panel and into the wood. Screw the screws through the plaster or panel and into the joist or beam. Ensure the screws go sufficiently far into the wood to securely fix the light.
  - b. Concrete: You will require special fittings rather than the screws provided. Either seek professional help or buy the fittings from a good hardware or DIY shop. (They should come with their own instructions which must be followed).
10. Double check all the connections are secure and that no loose strands of wire are left out of the driver, then fit all the wires and the driver back into the junction box.
11. Check that no wires are trapped behind or within the fitting and complete the installation, referring to the installation diagram inside.
12. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced.


Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM  
+44 (0)1993 882 251  
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND

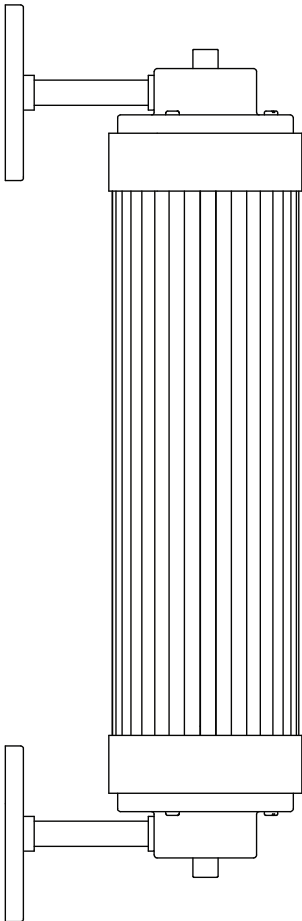

# Pillar Wall Light with Glass Rods | 120V ac 60Hz | IP44

LAMP GUIDANCE		
MODEL	TYPE	WATTAGE
US-DP7216	LED	10W
Integral LED light source. DO NOT ATTEMPT TO REPLACE LAMP. In case of lamp failure contact original point of purchase.		

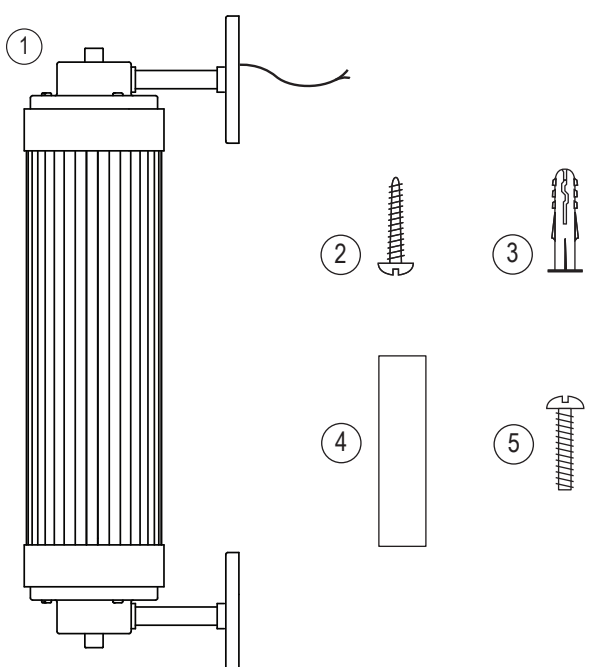

1 - Lamp  
2 - 4 x Fixing Screws  
3 - 4 x Rawl Plugs  
4 - 12V LED Driver  
5 - 4 x Junction Box Screws

Required for Installation

- Screwdriver, flat-head
- Small screwdriver, flat-head
- Drill (if holes are required)


## Installation and Assembly Instructions

- Supplied with dimmable driver - compatible with most trailing edge dimmers.
- Make electrical connection following the instructions overleaf. Ensure fitting is connected via the supplied 12V LED driver.
- Use supplied fixings to secure the fitting to the wall, as shown in the diagram above opposite.

## Cleaning & Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) if necessary. Switch off power to the fitting before cleaning. Spare parts are available for this product, please contact us on the details below.

## Installation Diagram

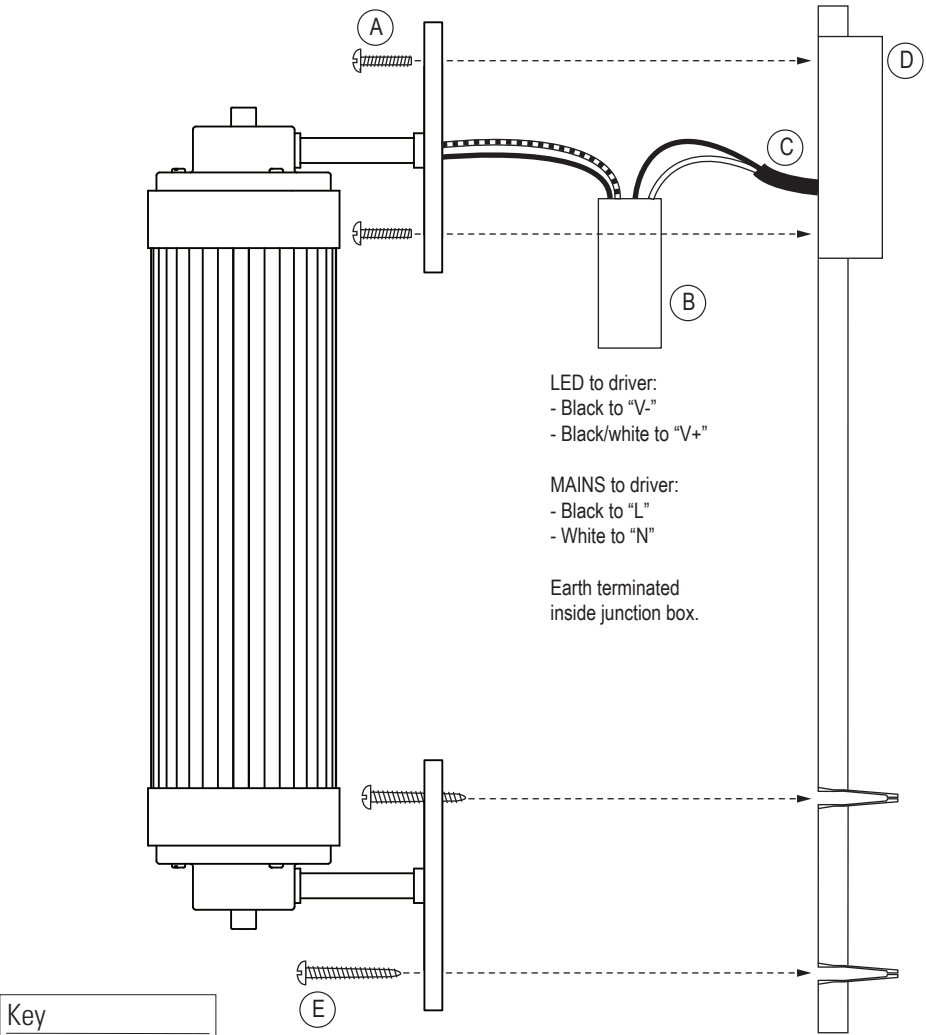

Key

A Junction Screws  
B Driver  
C Main Supply  
D Junction Box  
E Fixing Screw

NOTE: If the fitting is being installed in an exterior location or bathroom we recommend sealing the backplates using a thin bead of silicone.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT