

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.
SUITABLE FOR DAMP LOCATIONS
THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.


FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC.
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.
CONVIENT AUX EMPLACEMENTS HUMIDES
L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.

- 1 Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
- 2 If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live (hot), neutral and earth (ground) terminals.
- 3 Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
- 4 Position the light where desired ensuring that there is access to a suitable junction box for the fixture and suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.

a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.

b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.

c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings.
- 5 Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire to the ground terminal or green/yellow wire connected to the fitting.

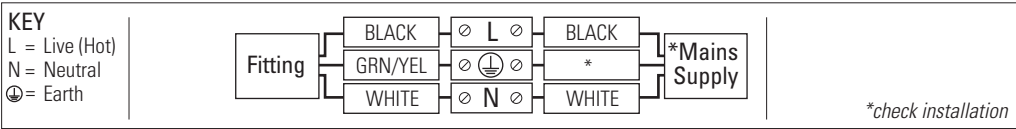


- 6 Support the fitting so that no strain is applied to the wiring when making the electrical connections.
- 7 Double check all the connections are secure, no wires are trapped behind or within the fitting and complete the installation, screwing the fitting to the wall, over your junction box.
- 8 Fit the correct type and wattage of bulb, referring to guidance inside. Do not overtighten bulb.
- 9 Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information


Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced.

Cleaning and Maintenance


Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Switch off power to the fitting before cleaning.

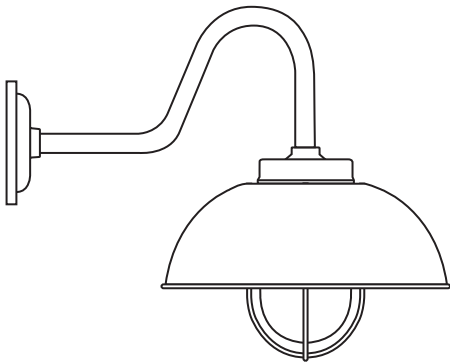

Shipyard Wall Light
US-DP7222/BRKT

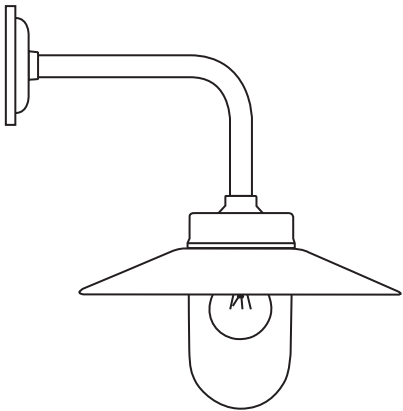

Exterior Bracket Light
US-DP7680

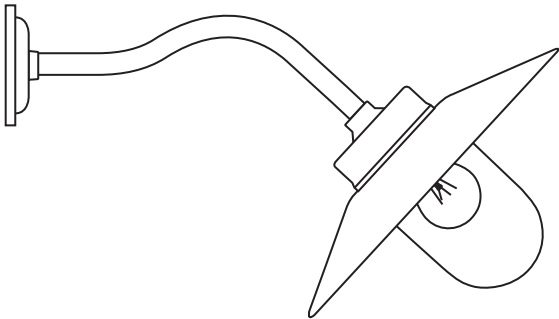

Exterior Bracket Light
Canted Arm
US-DP7680/C

Bracket Light

US-DP7680 / US-DP7222

120V ac 60Hz | IP54

US-DP7680




US-DP7680/C


US-DP7222/BRKT

Exterior Bracket Light

Exterior Bracket Light, Canted Arm

Shipyard Wall Light

LAMP GUIDANCE				
BASE	SHAPE		TYPE*	WATTAGE**
 E26	 A	 BALL	INCANDESCENT	60W MAX
			CFL	15W
			ECO-HALOGEN	28W
			LED	12W
* Warm white (2700k) low energy lamps recommended.				
** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.				

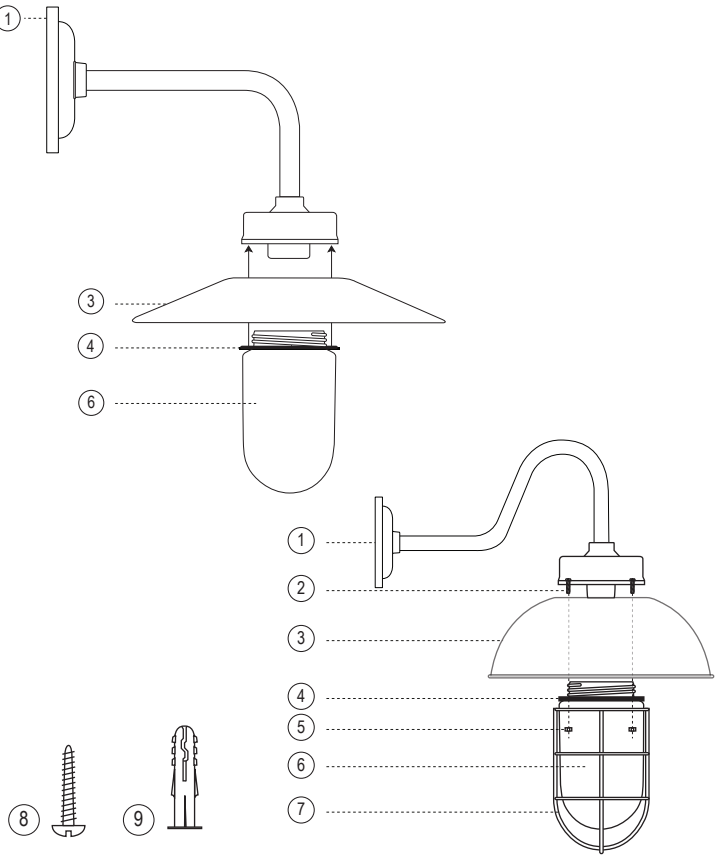

- Contents
- 1 - Backplate/Arm/Pan assembly

2 - 4 x Guard screws

3 - Reflector

4 - Gasket

5 - 4 x Guard Nuts

6 - Well Glass

7 - Guard

8 - x2/x4 Fixing screws


9 - x2/x4 Rawl plugs
- Required for Installation
- Screwdriver, flat-head

- Small screwdriver, flat-head

- Drill (if holes are required)


- Wire nuts (10)

- Junction box (11)



Installation Diagram

STEP 1

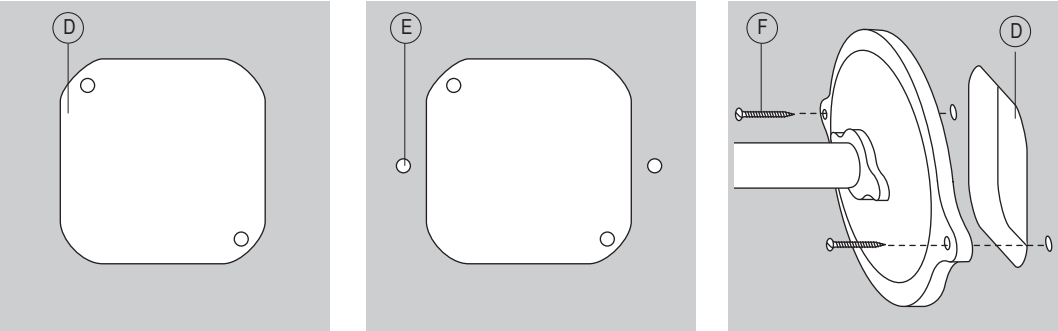

STEP 2

- Key
- A - Bracket Light

B - Wire nuts


C - Main supply

D - Junction box*

E- Rawl plugs (if necessary)

F - Fixing screws

*not supplied

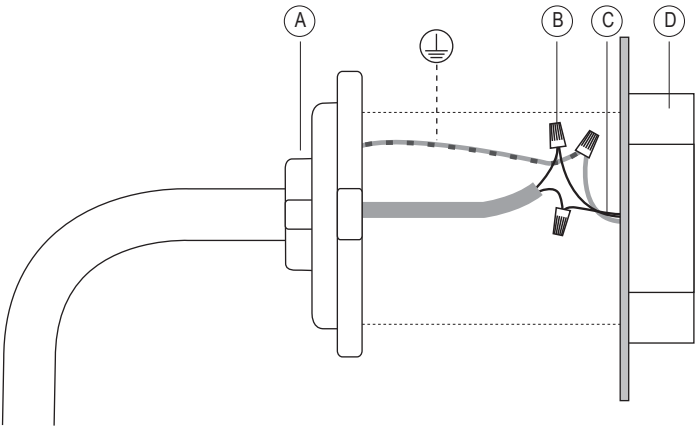

Installation and Assembly Instructions

- Step 1 - Mark fixing holes for fixing screws- following point 4 & 5 overleaf.
- Step 2 - Make electrical connection and fix backplate to the wall following points 6 & 7 overleaf.
- Step 3 - Assemble the rest of the light following the diagram on opposite page:
- ensure gasket is in place around neck of glass and screw into the pan through the opening in the reflector. DO NOT OVERTIGHTEN.

- 7222: The guard can now be attached to the reflector, inserting the screws (2) through the holes in the top of the reflector, then through the loops around the top of the guard. Secure the guard to the underside of the reflector, fastening the nuts (5) firmly to the screws.

If installing in a damp location, a seal must be made around the backplate where it meets the wall. The installer should apply a bead of suitable silicone sealant around the backplate where it meets the wall to ensure the junction box is protected from moisture ingress.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT