


Designed by Bonderup & Thorup

### PRODUCT



### COLOURS

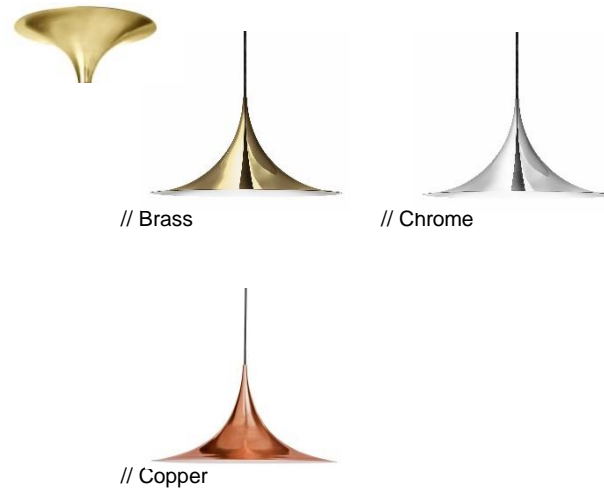

Item no.: 004-023XX  
 + style code  
 - 39: Brass  
 - 40: Chrome  
 - 46: Copper

### DESCRIPTION

Semi is a unique pendant lamp, based on two quarter-circles put together, back-to-back. It's distinctive arch-shaped shade in lacquered, spun metal creates a diffused, cone-shaped light, ideal over a dining table or kitchen work surface.

### VERSION - SEMI PENDANT Ø47 / SM2

Colour codes are indicative.


- Fabric wire - Black:
- Brass / White inside // Brass / RAL 9003 // Gloss level shiny / Gloss level 10
- Chrome / White inside // Chrome / RAL 9003 // Gloss level shiny / Gloss level 10
- Copper / White inside // Copper / RAL 9003 // Gloss level shiny / Gloss level 10

### PENDANT VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**SM1, SM2, SM3**

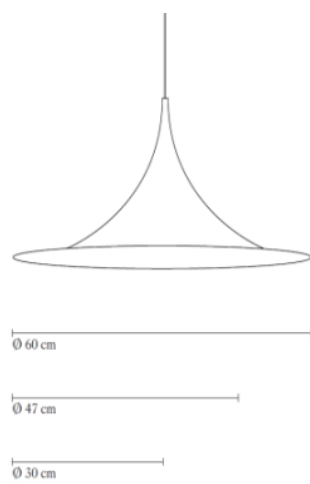

### ACCESSORIES

SILVER CROWN REFLECTOR BULB / HALF MIRROR BULB:  
 Item no.: 004-99002 60W, E27 base - box of 10 pcs.

### FACTS

#### MEASUREMENT - L X W X H inches

- Lamp canopy height: 2,2 inches
- Lamp canopy diameter: 4,5 inches
- Shade height: 9,3 inches
- Shade diameter: dia. 18,5 inches
- Cable length, exposed: APP. 86,6 inches
- Cable length, total: APP. 98,4 inches

WEIGHT ITEM - LAMP INCL. WIRE AND CANOPY  
 3,4 lb

#### PACKAGING TYPE

Cardboard box

#### PACKAGING MEASUREMENT - L X W X H inches

L:19,7 X W:19,7 X H: 11,2 inches

#### WEIGHT PACKAGING - MATERIAL TYPE (recyclable)

- Delivery note: 0,2 oz
- PE-LD PolyEthylen, bottom and top: 1,5 oz
- Socket protection: 0,4 oz
- Brown paper post (2 pcs. Triangles and canopy box): 11,2 oz
- PE polybag: 2,2 oz
- Cardboard, outer white box w/5ply Corrugated: 3,9 lb
- Screws: 0,25 oz

#### WEIGHT PACKAGING - TOTAL

4,9 lb

#### NUMBER OF PARCELS

1 pcs.

## ENVIRONMENT

-

## TESTS

-

## CERTIFICATION AND LABELS

## INSTALLATION INSTRUCTIONS

Instructions document: No. 52-20-002-01

### Bulb requirements:

- Socket: E26
- Recommended light source: Silver crown reflector bulb / Half Mirror bulb
- Recommended wattage: 60 W
- Max. Incandescent wattage: Max. 60 W

\*Semi is on delivery supplied with 1 silver crown reflector bulb.

\*US voltage: 120 V

\*Frequency: 60 Hz

\*Supply voltage: AC power ~

\*Normally Closed: IP20




Class II / Double insulated




Luminaires accepted for mounting on a flammable base

**Step 6**  
14 Attach the canopy by screwing it on the ceiling bracket.




# GUBI

## Semi



**Step 7**  
15 Place light bulb in lamp and turn the power on.



**BULB REPLACEMENT**

- Disconnect the power before replacing bulb.

**TROUBLESHOOTING**

- If lamp does not light, turn off the power. Check the bulb for a broken filament. Replace bulb if necessary, then turn it on.
- If the lamp still does not light, please contact customer service at the local dealer.
- If the external flexible cable or cord of this lamp is damaged, it must be replaced by a qualified electrician in order to avoid a hazard.


**GUBI A/S**  
 Høvedsvej 7-9 / Piskhus 53 T: +45 3332 0300  
 2150 Nordhavn, Copenhagen CVR: 17942034  
 Denmark WWW.GUBI.DK

**Technical information:**  
 Light source: Silver crown reflector bulb/half mirror bulb. Semi diameter 30, E12 max. 40W / diameter 47 and 60, E26, max. 60W.  
 Turn power off when changing light bulb.  
 Installation class II.  
 The lamp is not approved for outdoor use or use in damp/wet rooms (IP20).


**Some advice on cleaning your Semi lamp:**  
 Wipe the parts with a damp cloth soaked in warm water and a bit of mild detergent.  
 Use only soft cloth for wiping and polishing, never sponge or steel wool.  
 Do not use abrasive household cleaners.  
 Do not use acidic or alkaline cleaning materials, glass cleaner or household ammonia.

**Step 1**  
1 Put the cable through the lamp shade.


When mounting directly on the ceiling continue to step 2.  
If mounting on top of a ceiling box continue to step 5.




**Step 3**  
4 Find the desired length of cable and cut off the outer isolation.  
5 Mount the cable in the cable clamp.  
6 Connect grounding wire to the ground screw, if necessary.

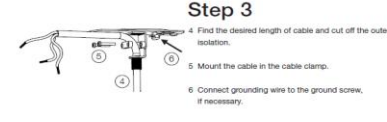


**Step 2**  
2 Attach ceiling bracket with screws.  
3 Pull cable through canopy shade.



**Step 4**  
7 Attach the canopy by screwing it on the ceiling bracket.  
8 Connect lamp cable to the supply wires.  
9 Place light bulb in lamp and turn the power on.



**Step 5**  
10 Pull cable through canopy shade, find the desired length of cable and cut off the outer isolation.  
11 Connect lamp cable to the supply wires.  
12 Connect grounding wire to the ground screw.  
13 Attach ceiling bracket with screws.



82-20-002-01 Semi (metal mounting) rev. 1.0