

# BERT | FRANK

## SHEAR XL PENDANT LIGHT

### MAINTENANCE

- Lacquered brass should be wiped with a soft duster.
- Colour parts can be wiped with a dry cloth.

### TECHNICAL


- 1 x E27 LED bulb (UK/EU)  
or
- 1 x E26 LED bulb (USA)

www.bertfrank.co.uk  
+44 (0)207 164 6482

### INSTALLATION


- 1** - Feed electrical cable from ceiling through the wiring exit hole in mounting plate.  
- Screw plate to ceiling.

mounting plate

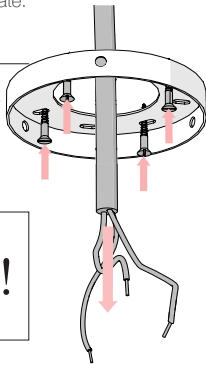


Use appropriate  
!! screws and plugs !!  
for the material you  
are fixing it to.


- 2** - Thread the flex from the shade up through and out the top of the drop rod.

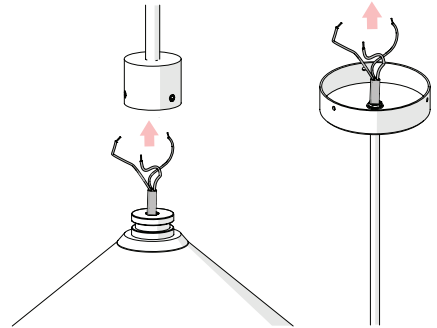

- 3** - Unscrew the grub screws from the drop rod.  
- Guide the drop rod down onto the top of the shade.  
- Replace the grub screws and secure.

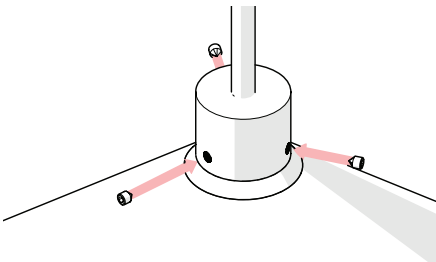


- 4** - Make electrical connection in the ceiling cover.  
- Connector block not supplied but ensure a suitable type is used.



!! Ensure this is done by  
!! a qualified electrician. !!


## INSTALLATION CONTINUED

- 5** - Screw the ceiling cover to mounting plate with 3 x screws on side of cover.

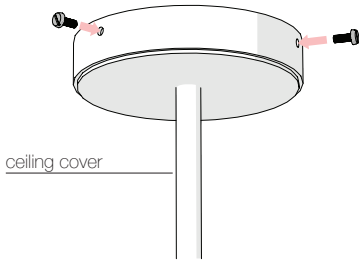

## BULB REPLACEMENT

- 1** - Turn off the light at the mains.  
- Replace bulb by screwing it into lamp holder.



This product is only suitable for connection to the native power supply to which the unit was specifically manufactured. It is for indoor use only, and not suitable for a bathroom location.

If the Class II, double insulated symbol is on the lamp, it does not require an Earth, and Live or Neutral must not be connected to Earth. If there is no such symbol, then the lamp must be Earthed.

Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.

If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

Allow 10 minutes to cool before replacing, adjusting or cleaning. Clean with a dry cloth only. Do not use liquid or abrasive cleaners.

If you are in any doubt about your competence please consult a qualified electrician.

If any modification is made it will invalidate the warranty and may render the product unsafe.