

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.
SUITABLE FOR DAMP LOCATIONS
THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.


FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC.
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.
CONVIENT AUX EMPLACEMENTS HUMIDES
L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.

- 1 Ensure that the electrical supply is OFF. Disconnect the electrical supply at the fuse-board.
- 2 If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live (hot), neutral and earth (ground) terminals.
- 3 Carefully identify where the supply cable is (and check there are no other cables in the area) to avoid damage to concealed wiring during installation.
- 4 Position the light where desired ensuring that there is access to a suitable junction box for the fixture and suitable support adjacent to where you will connect to the house supply and mark position of fixing holes, before drilling appropriate holes as below.

a. Brick or masonry: Drill holes into which the wall plugs tightly fit, then insert wall plugs.

b. Wood: No hole necessary (unless small pilot hole required), screws can be screwed directly into the timber.

c. Plaster/Cavity: Special cavity wall fittings are required, rather than provided fixings.
- 5 Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire to the ground terminal or green/yellow wire connected to the fitting.

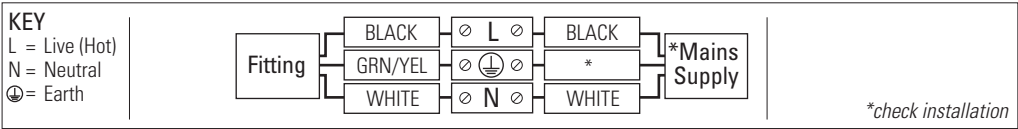


- 6 Support the fitting so that no strain is applied to the wiring when making the electrical connections.
- 7 Double check all the connections are secure, no wires are trapped behind or within the fitting and complete the installation, screwing the fitting to the wall, over your junction box.
- 8 Fit the correct type and wattage of bulb, referring to guidance inside. Do not overtighten bulb.
- 9 Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Switch off power to the fitting before cleaning.

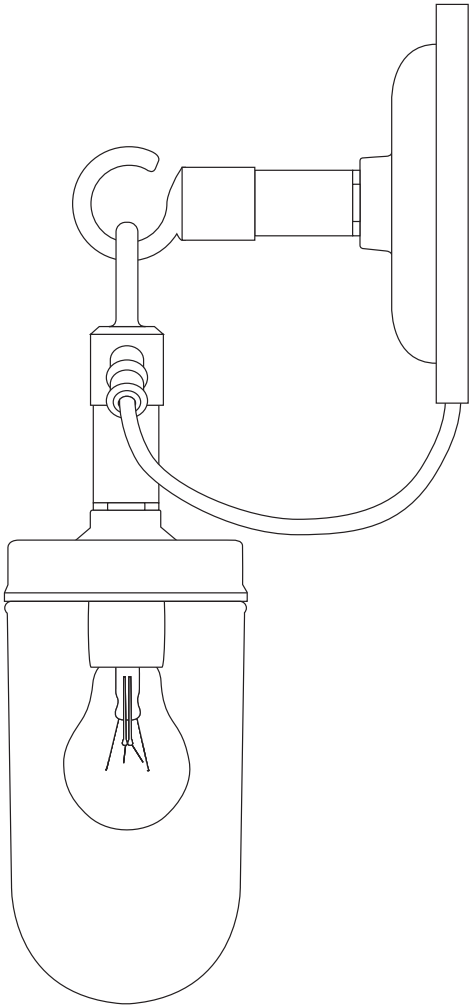




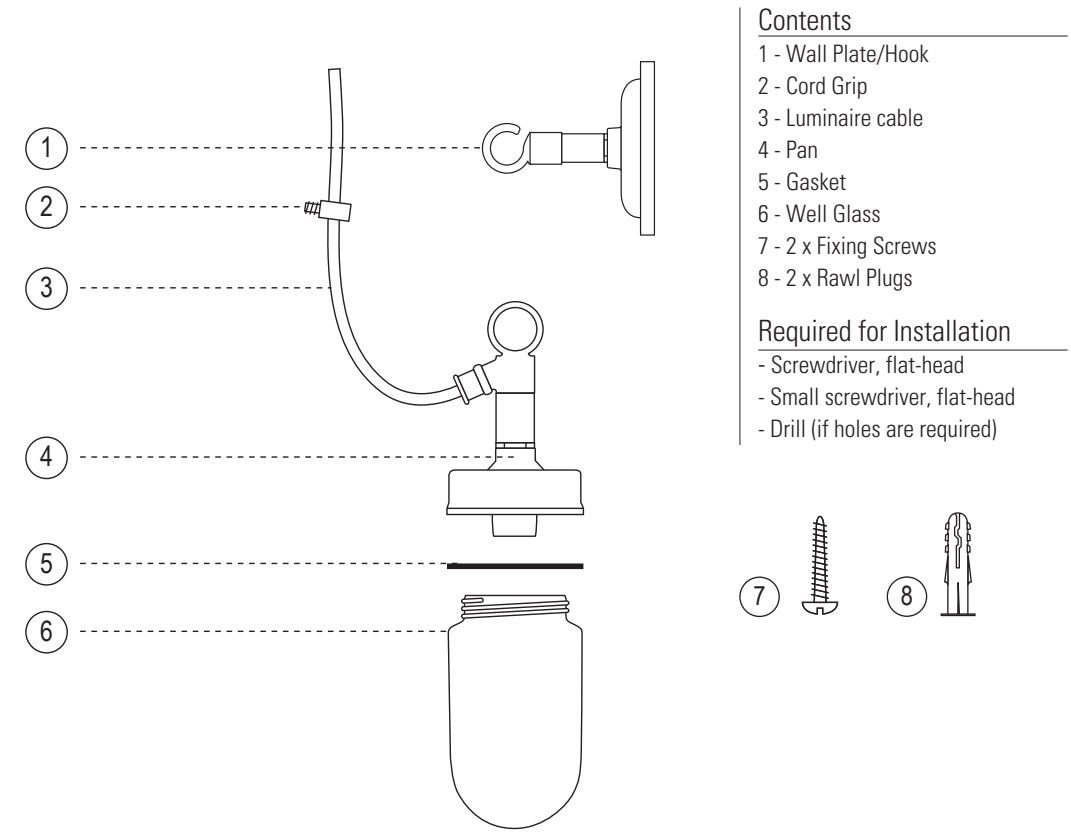
Well Glass Wall Light

| 120V ac 60Hz | IP20 |

7679/BRKT Well Glass Wall Light


With roots dating back to the shipyards of nineteenth century London, Davey Lighting combines industrial design, traditional craftsmanship and the finest raw materials. Authentic and unique, lights are manufactured in England with the same attention to detail required for their original industrial purpose. Simplicity of design and choice of finish, including weathered brass and copper, polished aluminium and galvanised cast iron, make Davey lights equally suited to traditional or contemporary schemes.

LAMP GUIDANCE				
BASE	SHAPE		TYPE*	WATTAGE**
 E26	 A	 BALL	INCANDESCENT ✓	60W MAX
			CFL ✓	15W
			ECO-HALOGEN ✓	28W
			LED ✓	12W
* Warm white (2700k) low energy lamps recommended.				
** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.				



Installation Diagram


STEP 1

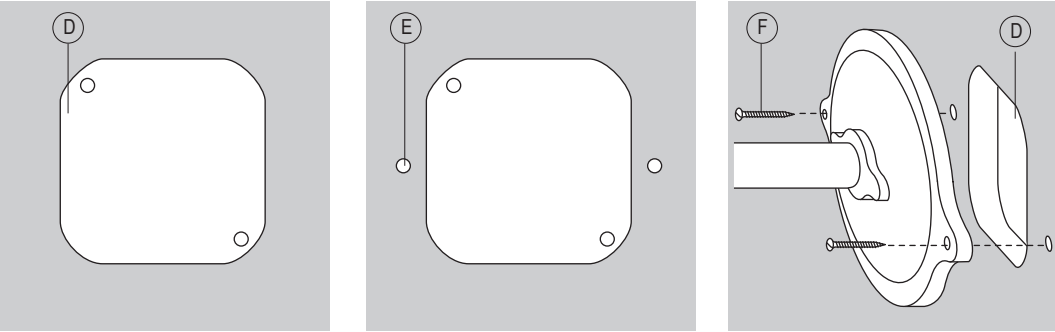

STEP 2

Key

- A - Bracket Light
- B - Wire nuts
- C - Main supply
- D - Junction box*
- E - Rawl plugs (if necessary)
- F - Fixing screws
- *not supplied

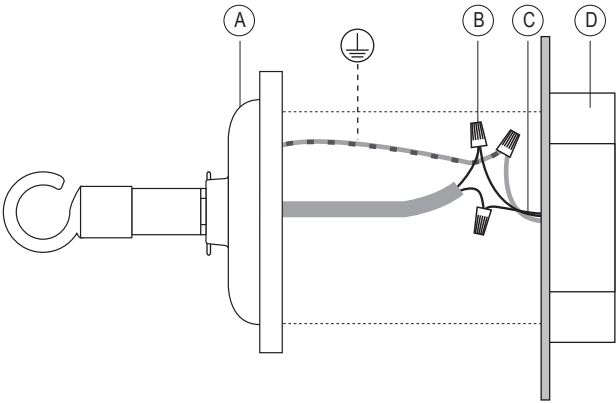

Installation and Assembly Instructions

STEP 1

Mark fixing holes for fixing screws- following point 4 & 5 overleaf.

STEP 2

Make electrical installation, following points 6-8 overleaf, then fix backplate to wall.

STEP 3

Assemble the rest of the light, following the diagram on the opposite page.

- Ensure the wide gasket (the one with the smaller inner hole) fits into the top of the pan (next to lampholder).
- Ensure the narrow gasket is positioned under the lip of the glass (and above reflector).
- Having inserted a light bulb, position the glass in the pan and then secure in place by attaching the reflector

If light is to be installed in an exterior location, it is advised that a thin bead of sealant is applied around the back plate to prevent water damage.