

James

Hartau Triple Instructions


Installation should be made by an electrician.
Make sure that the circuit breaker is shut down at
all time during the installation.

Necessary tools:

- Ceiling electrical box with screw
- Screwdrivers
- Wire connectors

1


In the fabric pouch attached to the
lamp, you'll find two bolts and two
allen wrench

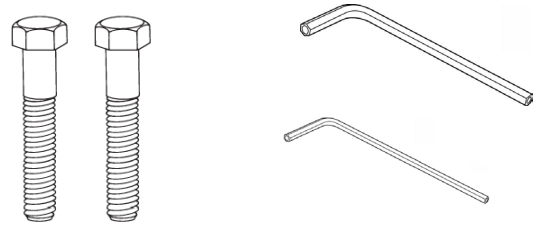

Make sure you have them before
starting.

2

Unscrew the
swivel cap with
a small flat
screwdriver.

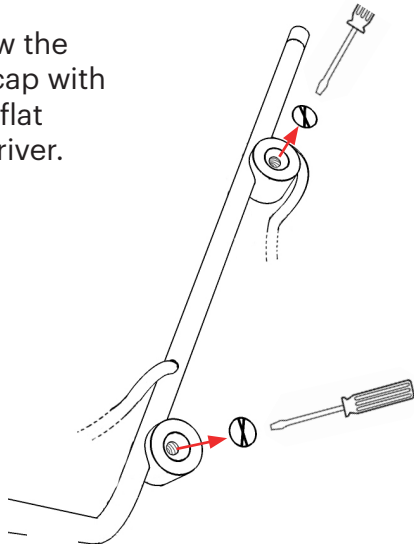


3

Place the two arms at the desired
angle, joining them at the swivel.

Place the bolt in the swivel
and tighten it with the
largest allen wrench.


Screw back the swivel
cap.

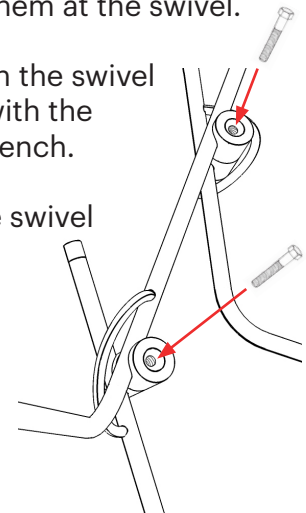

4


Get the wires from
the lamp through the
extension tube
all the way to the
canopy.

Screw the
extension tube into
the lamp.

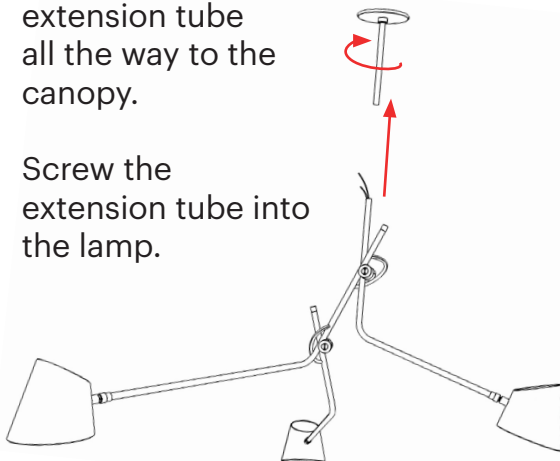


5

Using the smaller allen wrench
unscrew the ring below the
canopy and lower the canopy.

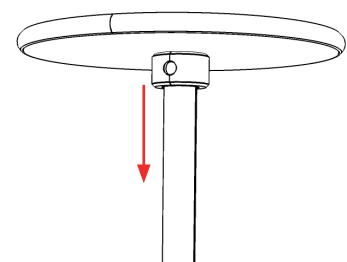

6


First, connect the ground to the green screw on the mounting plate.

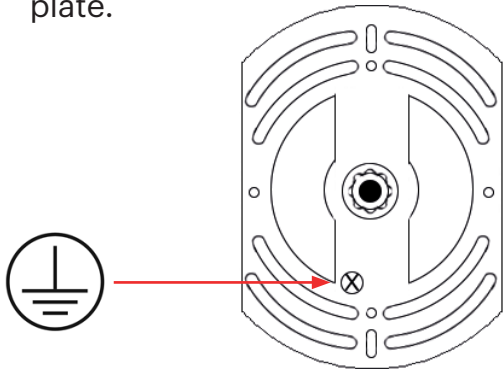

Then connect the electricity wires.

7

Fix the mounting plate to the electrical box with the screws of the electrical box

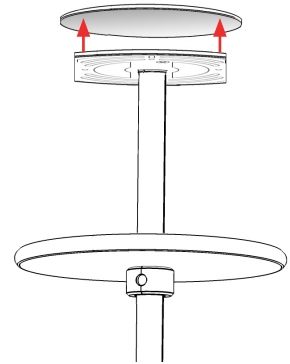

8

Put the canopy back up and tighten the ring.

