





Veris 34, matte black with matte white interior

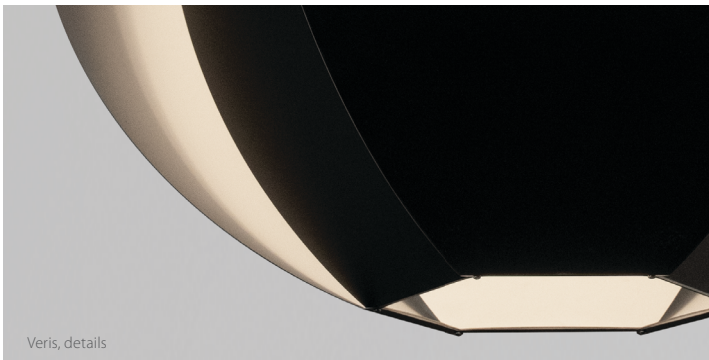

Veris, details

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

Veris 34
pendant

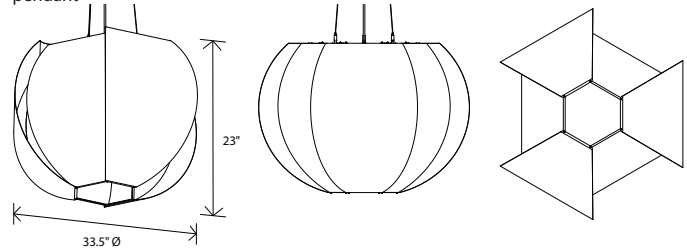

Dimensions: 33.5" Ø, 23"
Product weight: 8 lb
Suitable for a sloped ceiling

Integrated LED Specifications
Light output: 2815 Lumens (source)
Light color: 2700 K, 3000 K, 3500 K or 4000 K
Color accuracy: 90+ CRI
Power usage: 32.5 W
Dimmable (see driver below)
Driver housed in extended canopy
Driver dimensions: 3.3" x 2.4" x 1", included

E26 Medium Base Specifications
Lamping: 3x E26 base, type A lamp, 60 W max
Input voltage: 250 V AC max
Bulb not included

Textured Black (CM-049) extended round canopy with SVT-3 Cable, Black (CM-039) and 1/16" Stainless Steel Cables (CM-053)
Canopy dimensions: 5" Ø, 2"
See website for more canopy information
Field adjustable drop length: 1'0" min - 8'0" max
Specifications subject to change



MATERIAL & FINISH OPTIONS

Veris part # 06-260-34		-
Shade Material		
matte black (CM-085) with matte white interior	B	
brushed aluminum (CM-012)	A	
brushed rose gold (CM-046)	G	
brushed brass (CM-047)	R	
distressed brass (CM-096)	D	
gloss white (CM-054)	W	
Lamping		
2700 K LED	27	
3000 K LED	30	
3500 K LED	35	
4000 K LED	40	
medium base E26 socket	MB	
Driver (LED version only)		
AC Input Voltage Range: 120-277 V		
120 V input: TRIAC, ELV & 0-10 V dimmable	P1	
240 & 277 V input: only 0-10 V dimmable		

⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov