


# Abstract Wall

Installation Instructions



L I G H T I N G

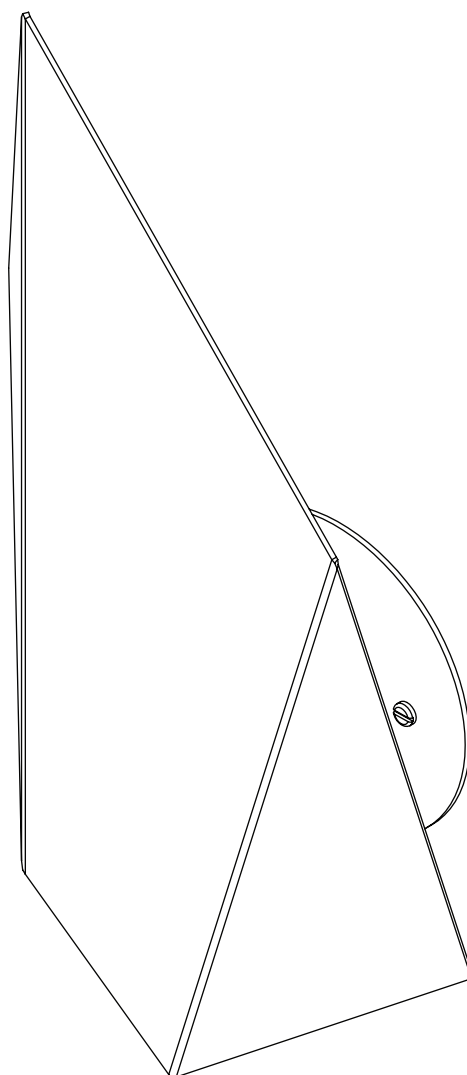


# Technical


bulbs	240v; 1 x G9 mains halogen, 25watt max 120v; 1 x G9 mains halogen, 25watt max
weight	1kg (2.5lbs)
certification	CE compliant
cleaning	Satin brass To clean use a soft dry cloth. If any marks remain clean the area using a damp soft cloth then dry afterwards with a soft cloth.  Satin Nickel To clean use a soft dry cloth. If any marks remain clean the area using a damp soft cloth then dry afterwards with a soft cloth.

# Components

Parts supplied as below, carefully unwrap them prior to installation



1x Adaptor plate for North America only

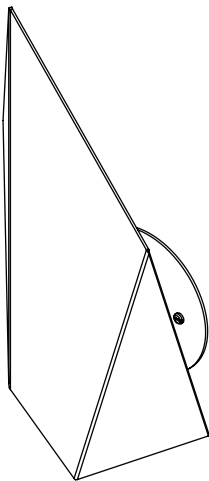

1x Abstract


# Before Installation

- Installation must be carried out by a qualified electrician.
- Check that the surface the fixture is being mounted to is suitable and strong enough to support the weight of the fitting.
- Always wear soft cotton gloves when installing the fixture.
- Carefully unwrap the product and handle with care during installation.
- Please note; we do not supply bulbs or mounting screws.

## Step 1- 240v

### 1a


Make sure the wall is suitable to support the weight of the fixture, drill 2 holes and put in raw plugs.

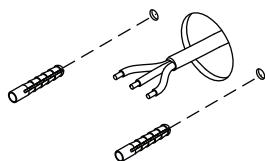

### 1b

Connect the fixtures electrical cables (trimming excess wire) to the mains cable using a terminal block (not provided). Make sure all the wires are colour matched and the fixture is earthed correctly.


Gently push the electrical connections into the wall cavity and then screw the wall bracket into the raw plugs.

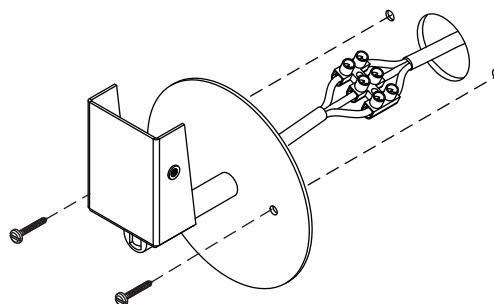

## Step 1- 120v

### 1a


Attach the adaptor plate onto the junction box, we do not supply these screws.

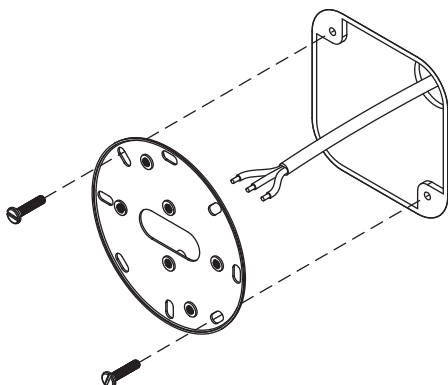


### 1b

Connect the fixtures electrical cables (trimming excess wire) to the mains cable using a wire nuts (not provided). Make sure all the wires are colour matched and the fixture is earthed correctly.

Gently push the electrical connections into the junction box and screw the wall bracket onto the adaptor plate.

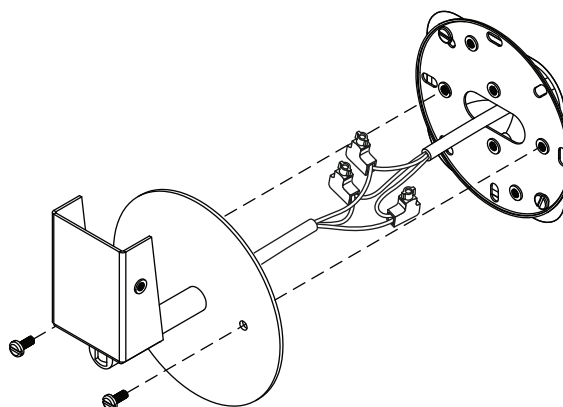


## Step 2

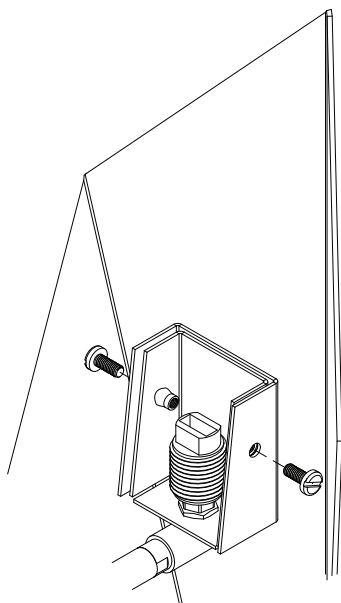

Attach the Abstract to the wall bracket, securely put the screws into place.

## Step 3

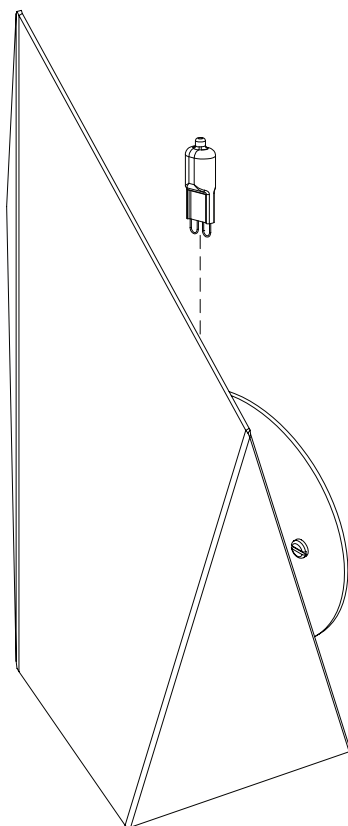

Gently push the G9 halogen bulb into the lampholder, we do not supply the bulb.

**CTO Lighting**  
9 Cloudesley Road  
London  
N1 0FH

+44 (0)20 7686 8700

info@ctolighting.co.uk  
**www.ctolighting.co.uk**