

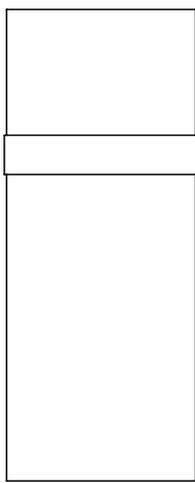




## CONTENTS

<p>Kazimir Body &amp; Canopy</p> 	<p>Crossbar</p> 	<p>(x2) J-Box Screws</p> 	<p>5/64 &amp; 9/64 Hex Drivers</p> 
	<p>(x3) Clips</p> 	<p>(x6) Socket Screws</p> 	<p>1/4-20 Crossbar Screw</p> 
<p>Long Rectangle Glass Assembly</p> 	<p>Short Rectangle Glass Assembly</p> 	<p>Circle Glass Assembly</p> 	

## SAFETY INFORMATION

Only suitable for direct mounting on non-combustible surfaces.  
 Under no circumstances can Kazimir fixtures be mounted on normally flammable surfaces.  
 Suitable for dry, indoor use only.  
 Maximum ambient temperatures: 25° C

## KAZIMIR PENDANT | CEILING INSTALLATION

*Note: Please contact a licensed electrician.*

*Note: Ensure power is off during installation.*

*Note: Ships with 8' cable length. If longer drop is needed, please specify at time of order.*

1. Secure crossbar (A) to junction box using provided 8-32 j-box screws.


2. Using provided 5/64 hex driver, loosen set screws from canopy (B) until canopy can drop down to rest on top plastic diffuser (C). Leave set screws partially threaded into canopy for later.

3. Adjust the drop of the fixture by pushing the ends of the x3 cable grippers (D) up to release x3 cables. Keep in mind that the bottom of the longest piece of glass will hang appx. 20" below the main body.

4. Hold canopy bracket (E) up to ceiling and let the main body hang from cables. Make wiring connections from driver to ceiling.

5. Secure canopy bracket (E) to crossbar (A) in desired orientation using 1/4-20 screw. Keep in mind that the glass pieces will be parallel to the three sides of the triangle.

6. Raise canopy (B) back up and using provided 5/64 hex driver, thread set screws back into place so that they re-enter the holes of the canopy bracket (E) and their heads rest flush with the surface of the canopy.

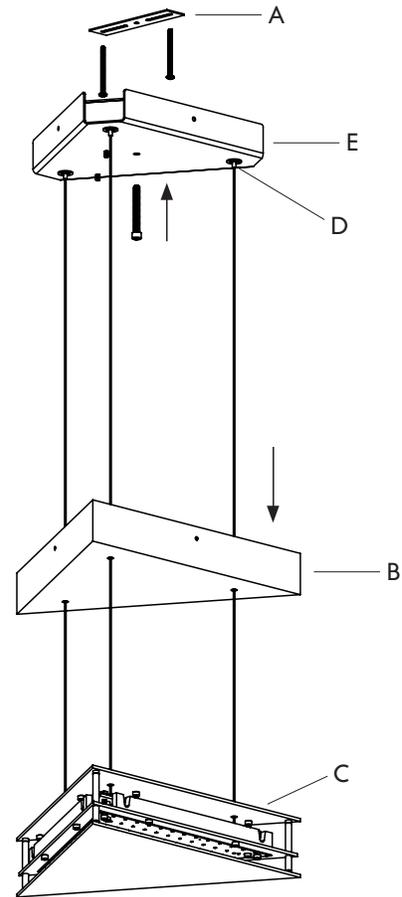

## KAZIMIR PENDANT | GLASS INSTALLATION

---

*Note: Please contact a licensed electrician.*

*Note: Ensure power is off during installation.*

*Note: Ships with 8' cable length. If longer drop is needed, please specify at time of order.*

1. Raise top plastic diffuser (A) out of the way by removing x3 white head screws and securing with provided clips.
2. Note: In a clock-wise fashion, the order of installation of the glass pieces will be: long rectangle, short rectangle, circle.
3. Start with the long rectangle glass assembly (B). Place glass assembly onto body so that the u-channel (D) slides onto the body rail (E) and rests in place. Secure u-channel to body rail from top with provided 9/64 hex driver and (x2) provided 8-32 socket cap screws (C).
4. Repeat step 3 for the short rectangle glass assembly and then the circle glass assembly in a clock-wise order.
5. Release the clips and lower the top plastic diffuser (A) back down. Fasten diffuser using x3 white head screws going into top standoffs (F).
6. Ensure that the fixture is level. If it is not level, push end of cable gripper up to release cable, or push cable up to shorten cable. Adjust one at a time to support weight of fixture.

