
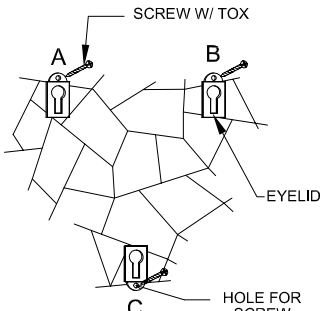
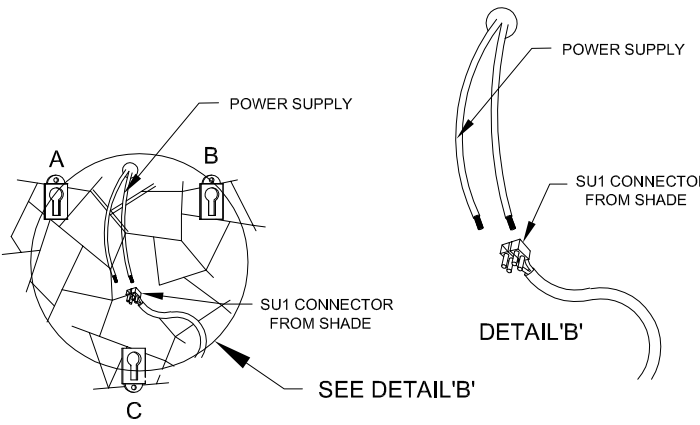
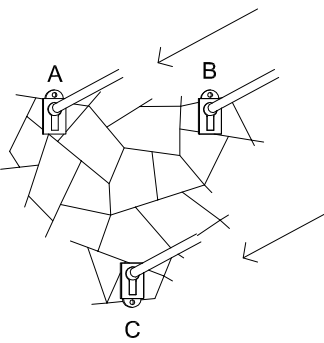
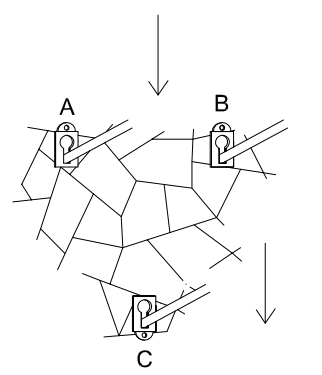
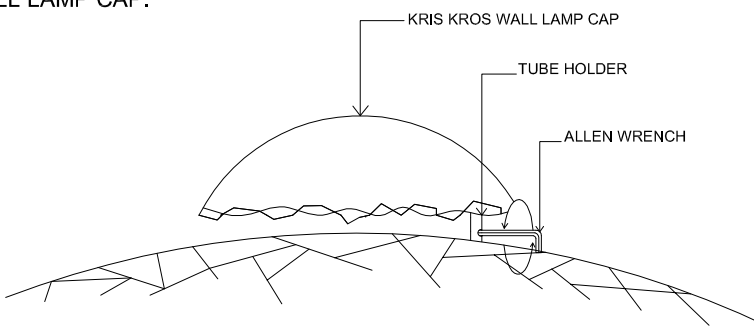


KRIS KROS WALL LAMP HOLDER & CAP ASSEMBLY.

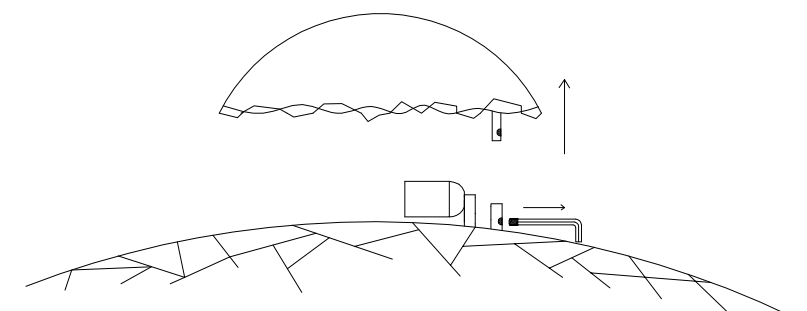

PARTS INSIDE:

- 1 SET KRIS KROS WALL LAMP
- 1 PC. ALLEN WRENCH
- 1 PC. INSERT NUT
- 3 PCS. SCREW w/ TOX
- 1 PC. KRIS KROS WALL LAMP HOLDER

<p>IMPORTANT SAFETY INSTRUCTIONS</p> <p>When installing or using lamps and /or other lightings accessories, basic safety precautions must be followed, including the following:</p> <ol style="list-style-type: none"> 1. Read all instructions before attempting any part of the installation. If you do not understand the instructions, do not attempt any installation. Save these instructions. 2. Install and mount lamps only on structurally sound surfaces. 3. Do not install any lamps closer than 6" from any curtains, exotic veneer or similar combustible materials. 4. To reduce the risk of the fire, electric shock and potential damage to the lamps, do not attempt to connect motors, power tools, extension cords, appliances, and the like on the branch circuit serving the lamps. 5. Disconnect electrical power circuit before adding to or changing the configuration of the lamps. 6. A certified electrician should install this product to avoid any untoward incident. 	<p>HOW TO INSTALL THE KRIS KROS WALL LAMP HOLDER TO THE WALL.</p>  <ol style="list-style-type: none"> 1. Mount the KRIS KROS wall lamp holder to the wall w/ the screws provided. 	 <ol style="list-style-type: none"> 2. Connect the flat cord to the power supply w/ the SU1 connector. 	 <ol style="list-style-type: none"> 3. Insert the KRIS KROS wall lamp legs into the eyelid holes. 	 <ol style="list-style-type: none"> 4. Pull the KRIS KROS wall lamp down to lock.
<p>HOW TO REMOVE THE KRIS KROS WALL LAMP CAP.</p>  <ol style="list-style-type: none"> 1. Insert the allen wrench into the hole under the cap stand. 2. Wind the allen wrench counter clockwise until loose. 	 <ol style="list-style-type: none"> 3. Remove the allen wrench and pull KRIS KROS wall lamp cap apart. <p>NOTE: UL Connection = white wire to neutral / black wire to live. CE Connection = blue wire to neutral / brown wire to live.</p>			