


LEE BROOM



CHAMBER


CONTENTS

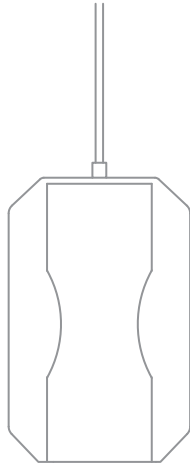

1 X
MARBLE
CHAMBER



1 X
CRYSTAL
VESSEL



1 X
CEILING ROSE

ATTENTION

- WE SUGGEST THAT CHAMBER SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- ENSURE POWER SUPPLY IS DISCONNECTED PRIOR TO INSTALLATION.
- THIS PRODUCT IS FOR INTERIOR USE ONLY AND SHOULD BE INSTALLED IN A DRY ENVIRONMENT.
- WHEN SWITCHED ON, CHAMBER MAY BECOME HOT.
- MINIMUM OF TWO PEOPLE REQUIRED FOR INSTALLATION.



40W
MAXIMUM
WATTAGE

THIS
PRODUCT
MUST BE
EARTHED

110/130V
50-60HZ

E26
LAMP
HOLDER

CARE AND CLEANING

- ONLY ATTEMPT TO CLEAN WHEN CHAMBER IS SWITCHED OFF.
- PLEASE ALLOW A SUITABLE COOLING PERIOD BEFORE ATTEMPTING TO CLEAN CHAMBER OR REPLACE THE BULB.
- ONLY USE A NON-ABRASIVE, SOFT, DRY CLOTH WHEN CLEANING CHAMBER.

ASSEMBLY

1. SEPARATE TOP PLATE FROM CEILING ROSE COVER BY REMOVING SCREWS.
2. TERMINATE ALL MAINS WIRES AT CONNECT POINT.
3. MOUNT THE BACK PLATE TO THE CEILING USING SUITABLE FIXINGS. ALWAYS USE APPROPRIATE FIXINGS FOR THE CEILING MATERIAL YOU ARE FIXING TO.
4. LOOSEN THE CABLE GRIP SCREW AND REMOVE PENDANT CABLE AWAY FROM CEILING ROSE.
5. THREAD THE PENDANT CABLE THROUGH THE CRYSTAL VESSEL.
6. THREAD THE PENDANT CABLE THROUGH THE CEILING ROSE AND ADJUST THE CABLE TO REQUIRED LENGTH.
7. TIGHTEN THE CABLE GRIP SCREW ONCE AT CORRECT LENGTH.
8. CONNECT EACH MAINS WIRE AND PENDANT WIRE INTO ITS CORRECT TERMINAL IN THE PROVIDED JUNCTION BOX.
9. ATTACH THE CEILING ROSE COVER TO THE BACK PLATE USING THE PROVIDED FOUR SCREWS.
10. FIT BULB INTO LAMP HOLDER (RECOMMENDED GOLF BALL BULB, MAX 40W).

