




DECANTERLIGHT

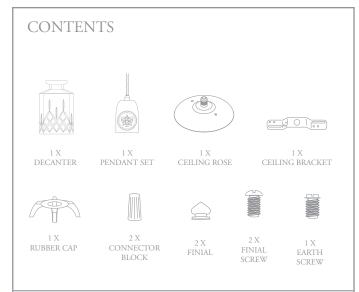

ATTENTION

- WE SUGGEST THAT THE DECANTERLIGHT SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN
- ENSURE POWER SUPPLY IS DISCONNECTED PRIOR TO INSTALLATION
- THIS PRODUCT IS FOR INTERIOR USE ONLY AND SHOULD BE INSTALLED IN A DRY ENVIRONMENT
- WHEN SWITCHED ON, THE DECANTER MAY BECOME HOT



25W TOTAL MAXIMUM WATTAGE THIS PRODUCT MUST BE EARTHED

110/130V 50-60 HZ E26 LAMP HOLDER

CARE AND CLEANING

- ONLY ATTEMPT TO CLEAN WHEN THE DECANTERLIGHT IS SWITCHED OFF
- PLEASE ALLOW A SUITABLE COOLING PERIOD BEFORE ATTEMPTING TO CLEAN OR REPLACE THE BULB
- ONLY USE A NON-ABRASIVE, SOFT, DRY CLOTH WHEN CLEANING THE DECANTERLIGHT

LEE BROOM

Lee Broom, Electra House, 93 Rivington St, London, EC2A 3AY Tel + 44 (0)207 820 0742 info@leebroom.com www.leebroom.com

ASSEMBLY - MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN

- 1. UNSCREW CABLE CLAMP TO WIDEN CORD ACCESS
- 2. PASS LOOSE END OF THE LIGHT FITTING CABLE THROUGH THE NECK OF THE DECANTER UNTIL SUPPORTED ON THE RUBBER CAP
- 3. THREAD THE CABLE THROUGH THE CEILING ROSE COVER
- 4. ADJUST TO REQUIRED HEIGHT
- 5. TIGHTEN THE CABLE CLAMP
- 6. TERMINATE ALL WIRES
- 7. FIX FINIAL SCREWS INTO ASSIGNED HOLES ON THE CEILING BRACKET
- 8. THREAD THE CEILING BRACKET TO THE CANOPY IUNCTION BOX TO SECURELY FIT
- 9. CONNECT EACH CABLE TO THE PROVIDED CONNECTOR BLOCKS
- 10. CONNECT THE EARTH TAG IN THE CEILING ROSE COVER TO THE CEILING BRACKET BY USING THE SCREW PROVIDED
- 11. FIX THE THE DECANTERLIGHT LIGHT AND CEILING ROSE COVER TO THE CEILING ROSE BRACKET BY THREADING THE FINIALS ONTO THE FINIAL SCREWS
- 12. FIT BULB INTO LAMPHOLDER (25W MAX)
- 13. THE CRYSTAL DECANTER SITS FREELY ON THE RUBBER CAP, ADJUSTMENT WILL BE REQUIRED IN ORDER TO LEVEL THE DECANTER
- 14. TO CHANGE THE LIGHT BULB, PLEASE ENSURE YOU LEAVE ENOUGH CABLE WHEN HANGING THE DECANTERLIGHT SO THAT YOU CAN SLIDE THE DECANTER UP THE WIRE AND CHANGE THE BULB (CHANGING THE BULB REQUIRES TWO PEOPLE)

