




LEE BROOM

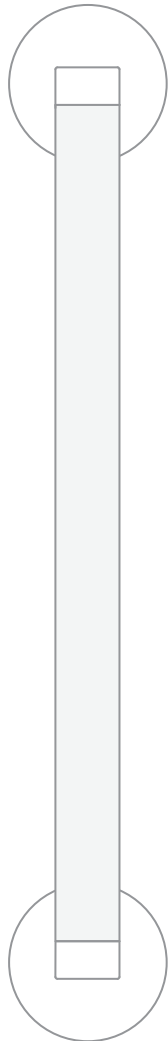


MARBLE WALL LIGHT

CONTENTS



1X
MARBLE WALL
LIGHT



1X
LED
DRIVER

ATTENTION

- The marble tube light must be installed by a professional, qualified electrician
- Minimum of two people required for installation
- Ensure power supply is disconnected prior to installation
- This product is for interior use only and should be installed in a dry environment only
- Please use a universal leading or trailing edge dimmer switch which is suitable for low wattage LEDs
- LED light source supplied



14.4W
MAXIMUM
WATTAGE

THIS
PRODUCT
MUST BE
EARTHED

INPUT
110/130V
50-60 HZ

OUTPUT
24V

CARE AND CLEANING

- Only attempt to clean when the marble tube light is switched off
- Only use a non-abrasive, soft, dry cloth when cleaning the marble tube light


LEE BROOM

Lee Broom, Electra House, 93 Rivington St, London, EC2A 3AY
Tel + 44 (0)207 820 0742 info@leebroom.com www.leebroom.com


ASSEMBLY - MUST BE INSTALLED BY A PROFESSIONAL, QUALIFIED ELECTRICIAN

1. Unscrew the x4 screws from the x2 wall roses.
2. Separate the wall rose top plate from the base plate.
3. Terminate all mains wires.
4. Create one suitable hole (Ø8cm) in the wall positioned exactly where the electrical power supply is located for the marble tube light. The hole in the wall is to house the LED driver. Ensure the hole is big enough to fit the driver but not so big that you can not securely fix you ceiling rose.
5. Mount the first back plate over the hole created to house the LED driver. Position the second back plate 84cm from the first back plate (measure from inside edge).
6. Connect the mains live and earth wires to the correct input connections on the LED driver.
7. Connect marble tube light power cable to output connections on LED driver. Please note the white labeled cable connects to the positive (red) output and the clear cable connects to the negative (black) output.
8. Hide driver in the hole in the wall.
9. Connect the mains earth wire to the earth tag in the wall rose top plate.
10. Lift the mable tube light into position and locate the wall roses with the base plates.
11. Use the x4 screws to secure the wall rose to the base plate ensuring all screws in both wall roses are secure before letting go of the marble tube light.


1, 2.




4.

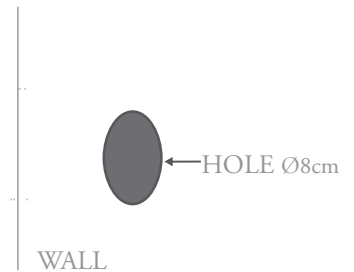


5.

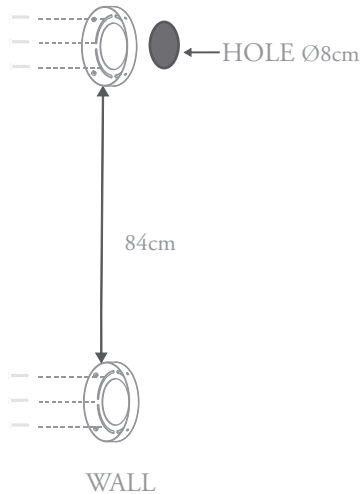


6.




7.



8.



9.



10./11.

