


Doo-Wop

The fixture primarily provides a downward directed soft light by means of the white lacquered inner conical reflector. The outer reflector, the main shade, contributes to directing the light upwards and downwards, while at the same time spreading the soft diffused light. The inside of the main shade is illuminated through an opening in the inner conical reflector.



**Carl Hansen &
Son Showroom**

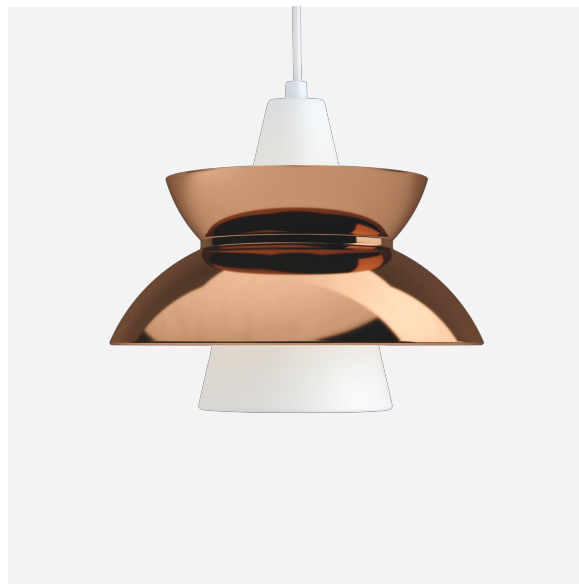

INGENIØR'NE

Product info

Finish

Dark grey or white, powder-coated. Brass, copper, or steel, polished and lacquered.

Materials

Shade: Spun aluminum or spun brass, copper, or steel. Suspension: Spun aluminum. Struts: Stainless steel.

Mounting

Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Sizes and weight

Width x Height x Length (in.) | 11.1 x 9.6 x 11.1 Max 5.0 lbs

Compliance

cULus, Damp location.

Light source

A-19/medium

Information

Electrical:

System Wattage: 22W

LED Wattage: 20 W

Delivered lumens: 1,625

Efficacy: 73.9 lm/W -

Certifications:

cULus, Damp Location

Protection class IP20

Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used.

Min.-Max. Ambient Temp:

Color Rendering: N/A



Product variants

Color	Light source	Voltage frequency
<input checked="" type="radio"/> Brass	A-19/medium	120V
<input type="radio"/> Copper		
<input type="radio"/> Dark grey		
<input type="radio"/> Stainl steel polish		
<input type="radio"/> White		

Product description

The fixture primarily provides a downward directed soft light by means of the white lacquered inner conical reflector. The main shade contributes to directing the light upwards and downwards, while at the same time spreading the soft diffuse light. The inside of the main shade is illuminated through an opening in the inner conical reflector. The main shade is available in painted aluminum, brass, copper, and stainless steel. The brass, copper, and stainless-steel shades are not coated and may be allowed to patina over time or periodically polished to maintain its original sheen.

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white fabric-covered power cord. Cord length: 12 feet.

Light description

A diffuse, downward light is reflected from the matte, white interiors of the shades, which is glare-free when hung at normal height. Doo-Wop pendant is provided with a medium base socket allowing the use of various color temperatures or wirelessly controlled lamps as desired.

Design

Louis Poulsen A/S in cooperation with the Navy Buildings Department

Material

Shade: spun aluminum, brass, copper, or stainless steel, 0.08 IN thick. Socket: Porcelain, medium base for A-19, clear envelope lamps. Canopy is spun aluminum, 0.03 IN thick. Standard finish on interior components are matte surface powder coat with minimum 2 mils thickness in white.
Brass, Cop lac, Dark grey, Stainl steel polish, White

Weight

Min: 2.705 lbs Max: 4.96 lbs

Other functions

Longer cord lengths. Alternative finishes.

Finish


Brass, Copper, Dark grey, Stainl steel polish, White

Voltage


120V

Light distribution diagrams

Cartesian

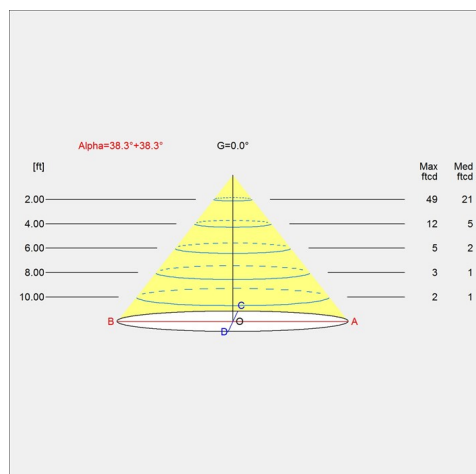

Isolux

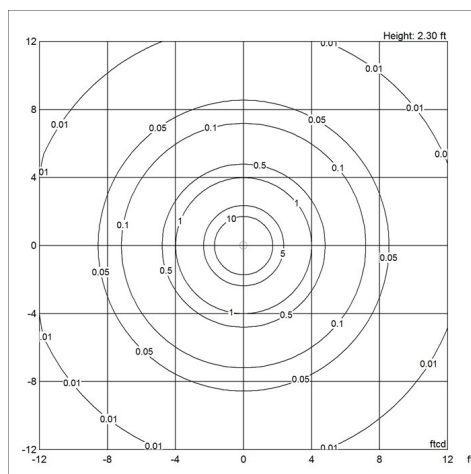

Polar

