

# Doo-Wop

Project name:

Project type:

Notes:



## Design

Louis Poulsen A/S in cooperation with the Navy Buildings Department

## Product description

The fixture primarily provides a downward directed soft light by means of the white lacquered inner conical reflector. The main shade contributes to directing the light upwards and downwards, while at the same time spreading the soft diffuse light. The inside of the main shade is illuminated through an opening in the inner conical reflector. The main shade is available in painted aluminum, brass, copper, and stainless steel. The brass, copper, and stainless-steel shades are not coated and may be allowed to patina over time or periodically polished to maintain its original sheen.

## Variant options

Color	Light source	Voltage frequency
<input checked="" type="radio"/> Brass	A-19/medium	120V
<input type="radio"/> Copper		
<input type="radio"/> Dark grey		
<input type="radio"/> Stainl steel polish		
<input type="radio"/> White		

Light description

A diffuse, downward light is reflected from the matte, white interiors of the shades, which is glare-free when hung at normal height. Doo-Wop pendant is provided with a medium base socket allowing the use of various color temperatures or wirelessly controlled lamps as desired.

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white fabric-covered power cord. Cord length: 12 feet.

Information

Electrical:  
System Wattage: 22W  
LED Wattage: 20 W  
Delivered lumens: 1,625  
Efficacy: 73.9 lm/W -  
Certifications:  
cULus, Damp Location  
Protection class IP20  
Controllability: Phase dimming  
Actual performance dependent upon screw-base lamp used.  
Min.-Max. Ambient Temp:  
Color Rendering: N/A

Finish

Brass, Copper, Dark grey, Stainl steel polish, White

Material

Shade: spun aluminum, brass, copper, or stainless steel, 0.08 IN thick. Socket: Porcelain, medium base for A-19, clear envelope lamps. Canopy is spun aluminum, 0.03 IN thick. Standard finish on interior components are matte surface powder coat with minimum 2 mils thickness in white. Brass, Cop lac, Dark grey, Stainl steel polish, White

Weight

Min: 2.705 lbs Max: 4.96 lbs

Other functions

Longer cord lengths. Alternative finishes.


Voltage

120V


Light distribution diagrams

For the full data set on all variants, see [louispoulsen.com](http://louispoulsen.com).


Cartesian

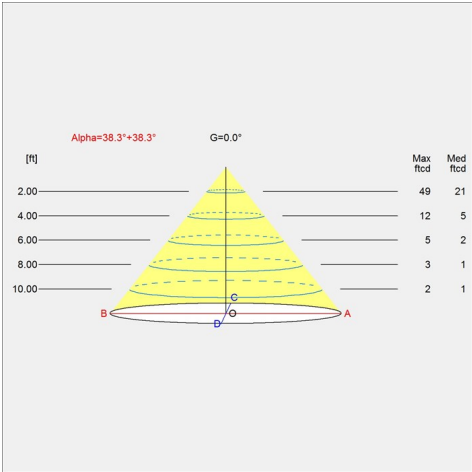



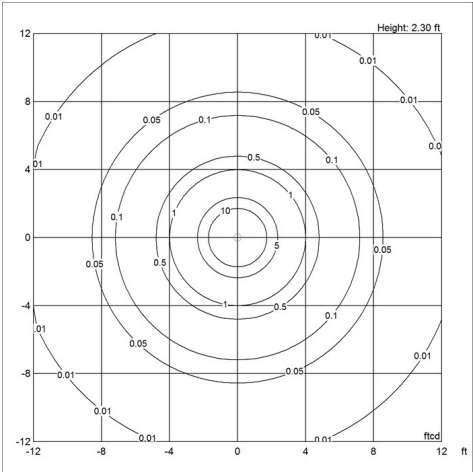


Isolux

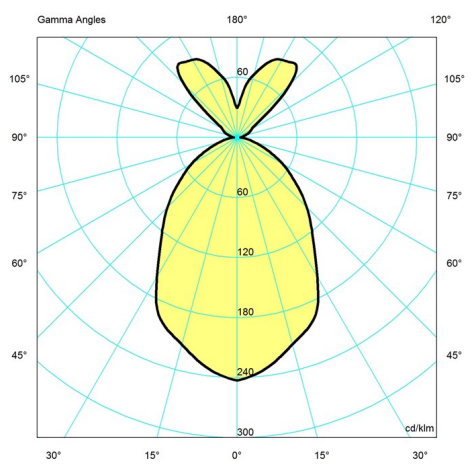

Polar



Variant options

Color	Light source	Voltage frequency	Variant number
 Copper	A-19/medium	120V	5741919950
 Brass	A-19/medium	120V	5741919921
 Dark grey	A-19/medium	120V	5741919934
 White	A-19/medium	120V	5741919947
 Stainless steel polish	A-19/medium	120V	5741919963