

# PH 3-2½ Wall

PH3-2½W / A-19/medium / 120V / Blk / 5743900022

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades have a matte white painted interior surface, diffusing the light in a comfortable way.



## Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



## Product info

### Finish

Black, powder coated.

### Materials

Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Die formed glass.  
Mounting plate: Die cast aluminum. Mounting plate cover: Spun aluminum. Arm: Stainless steel.

### Mounting

Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

### Sizes and weight

Width x Height x Length (in.) | 11.1 x 10.9 x 12.1 Max 4.7 lbs

### Compliance

cULus, Wet location.

### Light source

A-19/medium

### Information

Electrical:

System Wattage: 15 W

Delivered lumens: 720 lm

Efficacy: 48.0 lm/W

Certifications:

cULus, Wet Location

Protection class IP44

BUG Rating: B0-U3-G1


Controllability: Phase dimming

Min.-Max. Ambient Temp: -20°C to +40°C

Actual performance dependent upon screw-base lamp used.




## Product family




PH 3-2½ Bollard

# Light distribution diagrams


Cartesian

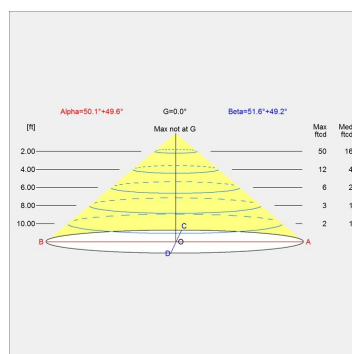


Isolux

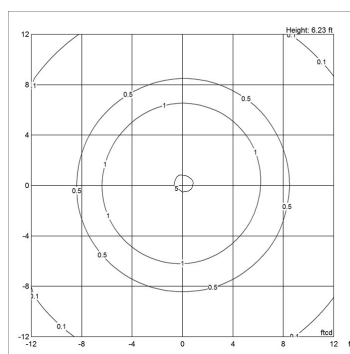

Polar

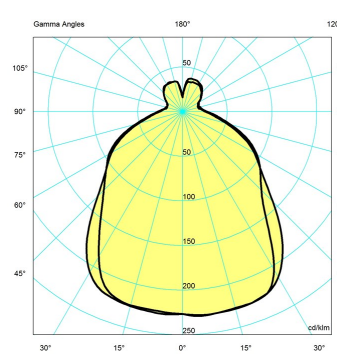

Bug

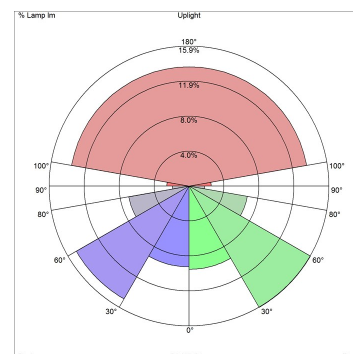

## Data specifications

BUG Rating	B0 U3 G1
Class	-
Efficacy	-
IK class	-
IP class	44
L80B10 (hours)	-
Length	12.1
Lumen	-
Net Weight	4.654
SDCM	-
Surges	-

Built-in Height	-
CRI	-
Height	10.9
Inrush Current	-
Kelvin	-
L80B50 (hours)	-
Light source	A-19/medium
Min. Dim Level (%)	-
Power Factor (P = 100 % / P = 50 %)	-
Standby (W)	-
UGR Transversal / Axial	43.4/43.6

Watt	-
Wind Load (ft2)	-

Width	11.1
-------	------