

PH 4/3 Pendant

PH4/3-P / A-19/medium / 120V / White classic matte / 5741910878

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of metal and painted white to ensure uniform, comfortable light distribution.



Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



Product info

Finish

White, powder coated.

Materials

Shades: Spun aluminum.

Mounting

Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Sizes and weight

Width x Height x Length (in.) | 15.7 x 7.2 x 15.7 Max 3.1 lbs

Compliance

cULus, Dry location.

Light source

A-19/medium

Information

Electrical:

System Wattage: 15W

LED Wattage: 14 W

Delivered lumens: 414

Efficacy: 27.6 lm/W -

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used.

Min.-Max. Ambient Temp:

Color Rendering: N/A




Product family




PH 4/3 Table

Light distribution diagrams


Cartesian

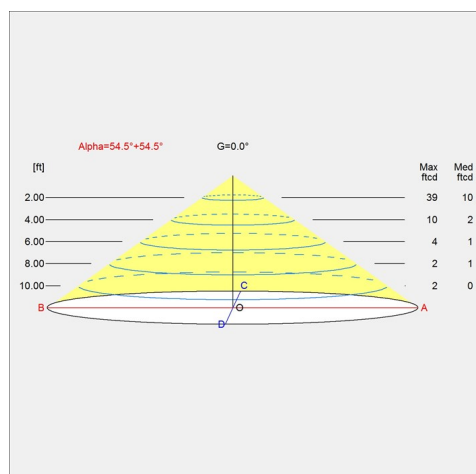

Isolux

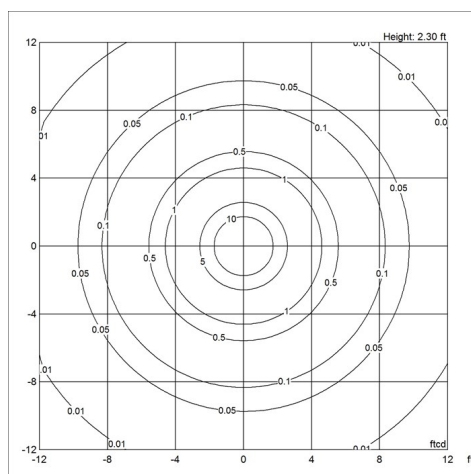

Polar

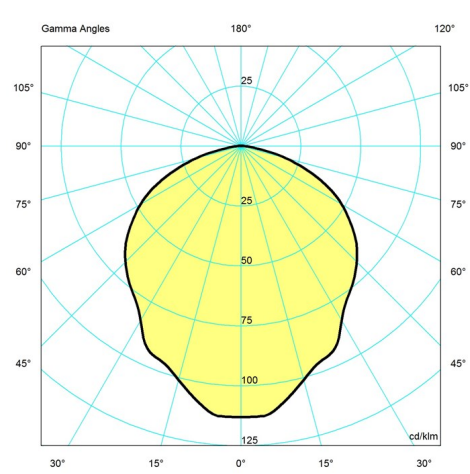

Spare parts & accessories

Product

PH 4-3, COVER PLATE, WHITE NEW
PH 4-3, COVER PLATE, ORANGE, F/OLD VER.

Variant number

5741087552
5741480997

Data specifications

BUG Rating	B0 U1 G0	Built-in Height	-
Class	-	CRI	-
Efficacy	-	Height	7.2
IK class	-	Inrush Current	-
IP class	20	Kelvin	-

PH 4/3 Pendant

L80B10 (hours)	-
Length	15.7
Lumen	-
Net Weight	3.137
SDCM	-
Surges	-
Watt	-
Wind Load (ft2)	-

L80B50 (hours)	-
Light source	A-19/medium
Min. Dim Level (%)	-
Power Factor (P = 100 % / P = 50 %)	-
Standby (W)	-
UGR Transversal / Axial	57.4/57.4
Width	15.7