


# PH 4/3 Pendant

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of metal and painted white to ensure uniform, comfortable light distribution.



## Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



## Product info

### Finish

White, powder coated.

### Materials

Shades: Spun aluminum.

### Mounting

Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

### Sizes and weight

Width x Height x Length (in.) | 15.7 x 7.2 x 15.7 Max 3.1 lbs

### Compliance

cULus, Dry location.

### Light source

A-19/medium

### Information

Electrical:

System Wattage: 15W

LED Wattage: 14 W

Delivered lumens: 414

Efficacy: 27.6 lm/W -

Certifications:

cULus, Dry Location

Protection class IP20

Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used.

Min.-Max. Ambient Temp:

Color Rendering: N/A



## Product family



PH 4/3 Table

## Product variants

### Light source

A-19/medium

### Voltage frequency

120V

# Product description

PH 4/3 Pendant is one of the iconic fixtures recognized throughout the world. It is a medium scale pendant of gently sloped metal shades with a lustrous metal socket housing on top. The iconic design is based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are aluminum with matte white finish, giving a soft and uniform light distribution. Part of a family including indoor and outdoor products.

---

## Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: White, flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white fabric-covered power cord. Cord length: 12 feet.

---

## Light description

Light distribution is downward. The curvature of the shades and their positions combined with a bottom metal plate positioned inside the smallest shade limit viewing of the lamp to reduce glare. Provided with a medium base socket for the customer to provide their desired lamp.

---

## Design

Poul Henningsen

---

## Material

Shades: spun aluminum, 0.06 IN thick. Vertical struts: nickel-plated steel. Canopy is spun aluminum, 0.03 IN thick. Standard finish are matte surface powder coat with minimum 2 mils thickness in white. Bottom shade has a wet painted interior of light yellow.  
White classic matte

---

## Weight

3.137

---

## Other functions

Longer cord lengths.

---

## Finish


White classic matte

## Voltage


120V

# Light distribution diagrams


### Cartesian

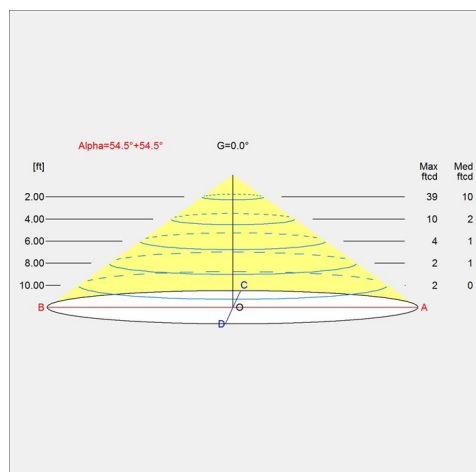

### Isolux

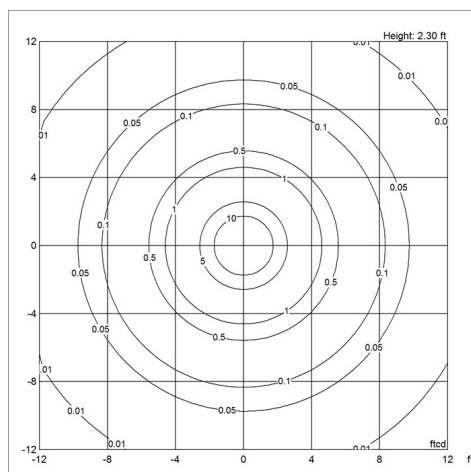

### Polar

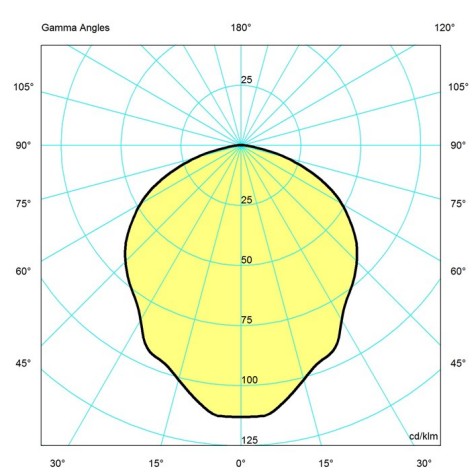

## Spare parts & accessories

### Product

PH 4-3, COVER PLATE, WHITE NEW

PH 4-3, COVER PLATE, ORANGE, F/OLD VER.

### Variant number

5741087552

5741480997