



VL Ring Crown 3-5-7

7 / A-19/medium / 120V / Brass/glossy opal glass / WHITE TEXTILE / - / - / 5741925481

The pendant emits light directed primarily downwards.
The opal glass provides a comfortable and uniform illumination of the area around the fixture.

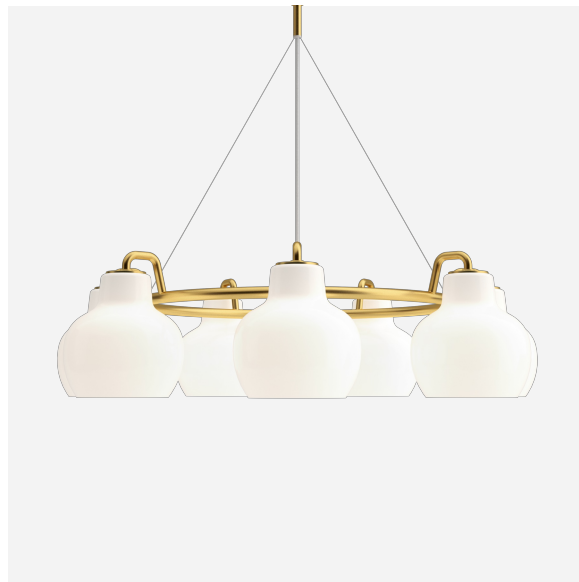

Vilhelm Lauritzen

Vilhelm Lauritzen (1894–1984) is one of the most significant architects in the history of Denmark; he was the trail-blazing figurehead of Danish functionalism. A number of his buildings – Nørrebro Theatre (1931–32), Daells Varehus department store (1928–35), Radiohuset (1936–41) and the first airport built in Kastrup (1937–39) – represented the concentrated essence of contemporary life.



Set location - The Silo

**louis
poulsen**

Design to Shape Light

louispoulsen.com

Product info

Finish

Glossy, hand blown white opal glass. Satin polished brass, untreated.

Materials

Shades: Hand blown, 3-layered, polished opal glass. Suspension: Untreated brass, will patinate.

Mounting

Mounting: Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'. Canopy: Brass. Cord type: 3-conductors, 18 AWG white braided fabric covered cord. Cord length: 12'.

Sizes and weight

Width x Height x Length (in.) | 27.2 x 9.2 x 27.2 Max 18.9 lbs | 21.7 x 9.2 x 21.7 Max 13.8 lbs | 35.2 x 9.2 x 35.2 Max 24.2 lbs

Compliance

Compliance: cULus, Dry location.

Light source

A-19/medium

Information

Electrical:

System Wattage: 45W or 105W

LED Wattage: 41 W or 97 W

Delivered lumens: 1,808 - 6,500

Efficacy: 40.2 lm/W - 61.9 lm/W

Certifications:

cULus, Dry Location

Protection class IP20


Controllability: Phase dimming

Actual performance dependent upon screw-base lamp used.




Light distribution diagrams


Cartesian

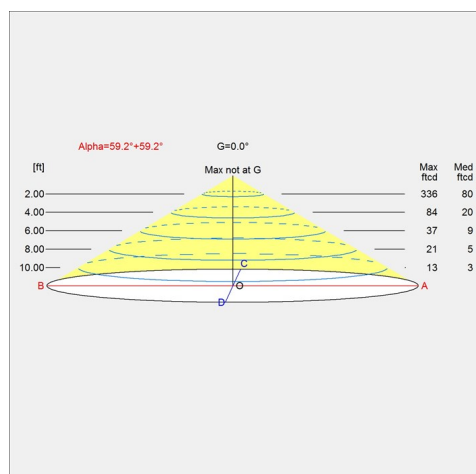

Isolux

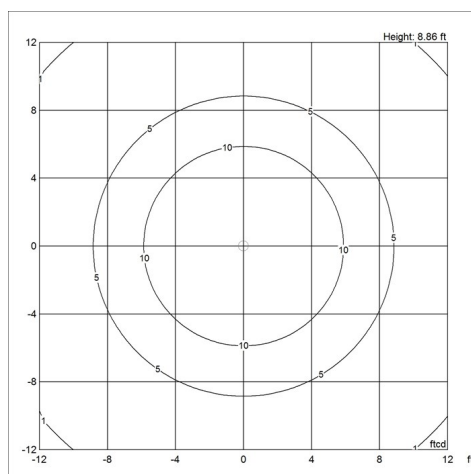

Polar

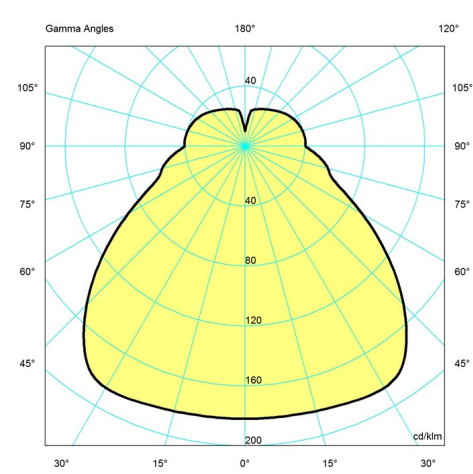

Data specifications

BUG Rating	B2 U5 G2	Built-in Height	-
Class	-	CRI	-
Efficacy	-	Height	9.2
IK class	-	Inrush Current	-
IP class	20	Kelvin	-
L80B10 (hours)	-	L80B50 (hours)	-
Length	35.2	Light source	A-19/medium
Lumen	-	Min. Dim Level (%)	-
Net Weight	24.163	Power Factor (P = 100 % / P = 50 %)	-
SDCM	-	Standby (W)	-

VL Ring Crown 3-5-7

Surges	-
Watt	-
Wind Load (ft2)	-

UGR Transversal / Axial	24.5/24.5
Width	35.2