



VL Ring Crown 3-5-7

The pendant emits light directed primarily downwards.
The opal glass provides a comfortable and uniform illumination of the area around the fixture.

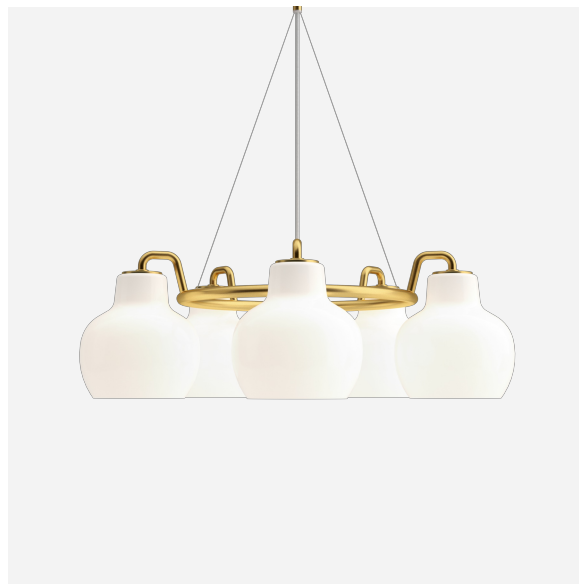

Vilhelm Lauritzen

Vilhelm Lauritzen (1894–1984) is one of the most significant architects in the history of Denmark; he was the trail-blazing figurehead of Danish functionalism. A number of his buildings – Nørrebro Theatre (1931–32), Daelis Varehus department store (1928–35), Radiohuset (1936–41) and the first airport built in Kastrup (1937–39) – represented the concentrated essence of contemporary life.



Set location - The Silo

**louis
poulsen**

Design to Shape Light

louispoulsen.com

Product info

Finish
Glossy, hand blown white opal glass. Satin polished brass, untreated.

Materials
Shades: Hand blown, 3-layered, polished opal glass. Suspension: Untreated brass, will patinate.


Mounting
Mounting: Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'. Canopy: Brass. Cord type: 3-conductors, 18 AWG white braided fabric covered cord. Cord length: 12'.

Sizes and weight
Width x Height x Length (in.) | 27.2 x 9.2 x 27.2 Max 18.9 lbs | 21.7 x 9.2 x 21.7 Max 13.8 lbs | 35.2 x 9.2 x 35.2 Max 24.2 lbs

Compliance
Compliance: cULus, Dry location.

Light source
A-19/medium

Information
Electrical:
System Wattage: 45W or 105W
LED Wattage: 41 W or 97 W
Delivered lumens: 1,808 - 6,500
Efficacy: 40.2 lm/W - 61.9 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Controllability: Phase dimming
Actual performance dependent upon screw-base lamp used.

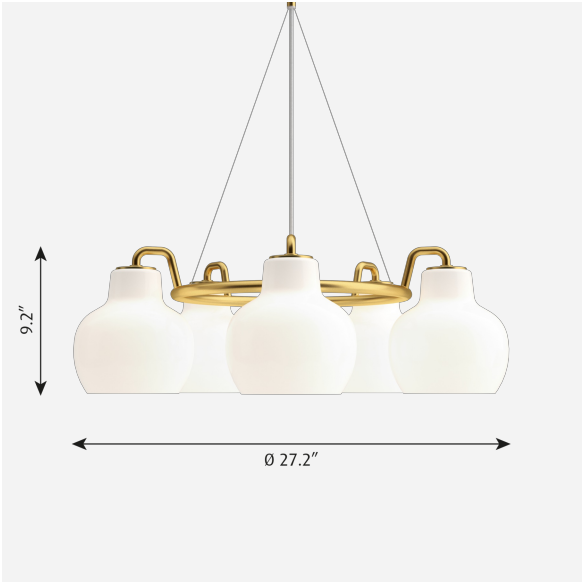

Product variants

| Dimension | Light source | Voltage frequency |
|-----------|--------------|-------------------|
| 3 | A-19/medium | 120V |
| 5 | | |
| 7 | | |

Product description

VL Ring Crown family derives from a lamp designed by architect Vilhelm Lauritzen for the Danish broadcasting house in Copenhagen. The VL Ring Crown Pendant features a brass stem mounted on a brass ring with brass arms supporting an opal white glass shade. The three different ring configurations are with either 3, 5 or 7 shades. The brass components are untreated and will develop a patina over time. The VL Ring Crown series includes a single glass pendant shade, and a wall mounted version.

Mounting

Mounts onto a 4 inch octagonal outlet box. Three stainless steel aircraft cables support the pendant. Canopy: Brass, cone profile, 5 IN diameter x 7 IN tall. Cord type: 3-conductor, 18 AWG white fabric-covered power cord. Cord length: 12 feet.

Light description

The fixture emits spherical, diffuse light and the thickness of the glass results in very comfortable light distribution. Direct view of the light source is limited by the small bottom opening to reduce glare. Provided with medium base sockets allowing the use of various color temperatures or wirelessly-controlled lamps as desired.

Design

Vilhelm Lauritzen

Material

Glass shade is opal white, handblown glass 0. 2 IN thick. Frame and canopy are brushed, untreated brass. Socket: Porcelain, medium base for A-19 size lamps. Mounting bracket is galvanized steel, 0. 06 IN thick. Three stainless steel aircraft-type wires, 0. 06 IN. Glass support: die cast aluminum.

Weight

Min: 13.832 lbs Max: 24.163 lbs

Dimensions

3, 5, 7

Other functions

Longer cord lengths.

Finish


Brass/glossy opal glass

Voltage


120V

Light distribution diagrams

Cartesian

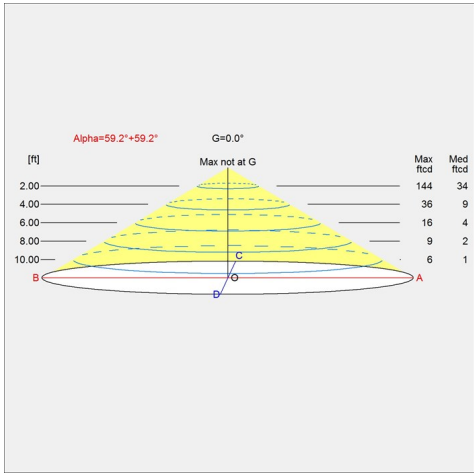

Isolux

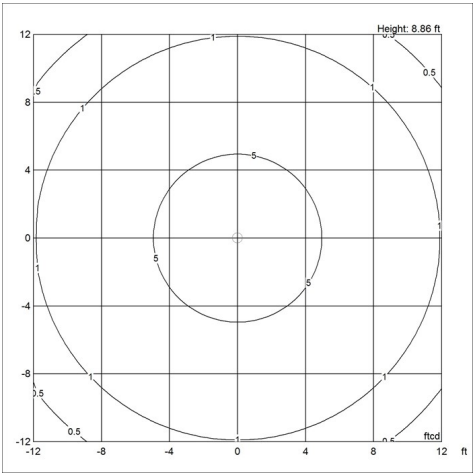

Polar

