


# ZIRKOL – S

ZIRKOL -S is a family of polygonal suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver included

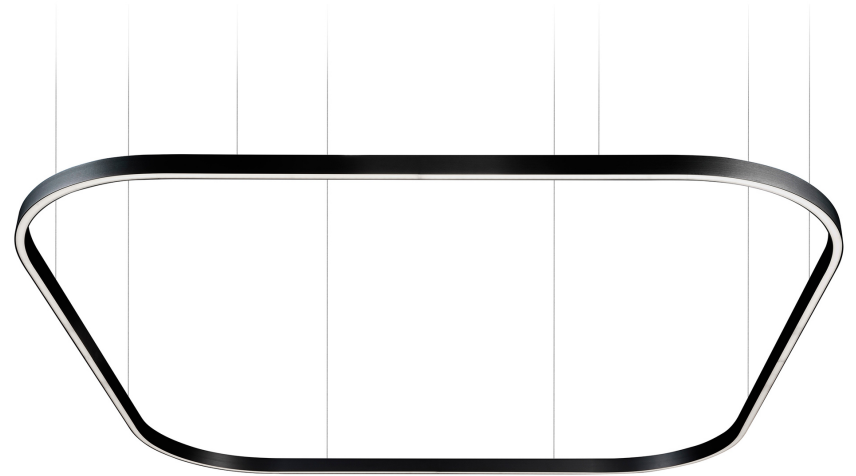

# 1,5X1,5M | DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	4432lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	Driver 100/305V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

## Codes

BZRQ1606G15DBO  
BZRQ1606G15DNE  
BZRQ1606G15DOR


## Structure

white  
black  
gold

## PACKAGE

Package 01 Dimension: 160x160x15 cm

## Certificazioni

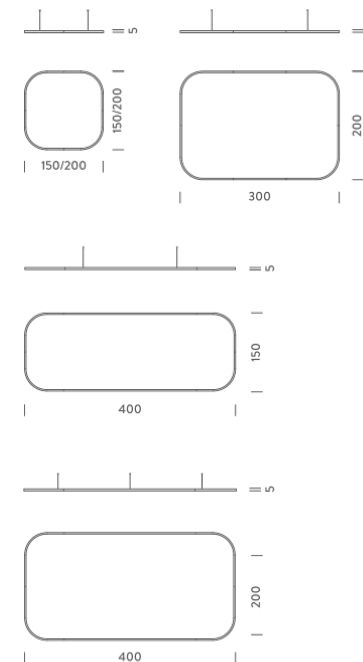

# 1,5X1,5M | UP - DOWNLIGHT - 2700K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	8863lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

## Codes

BZRQ1712G15DBO  
BZRQ1712G15DNE  
BZRQ1712G15DOR


## Structure

white  
black  
gold

## PACKAGE

Package 01 Dimension: 160x160x15 cm

## Certificazioni

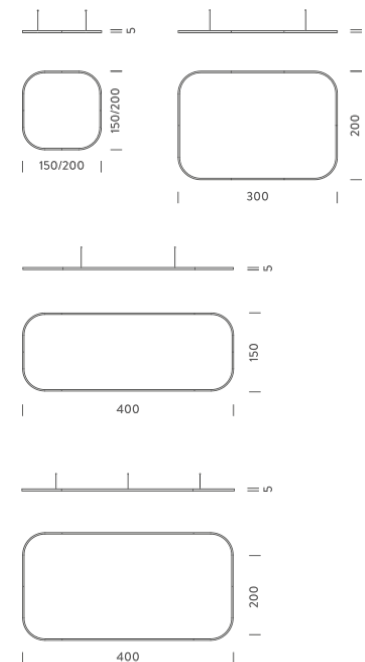

## 1,5X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	4692lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	Driver 100/305V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1606G15WBO  
BZRQ1606G15WNE  
BZRQ1606G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm

### Certificazioni

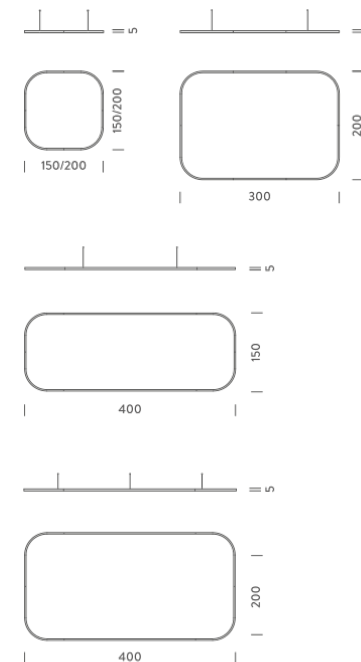

# 1,5X1,5M | UP - DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	9384lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

## Codes

BZRQ1712G15WBO  
BZRQ1712G15WNE  
BZRQ1712G15WOR


## Structure

white  
black  
gold

## PACKAGE

Package 01 Dimension: 160x160x15 cm

## Certificazioni

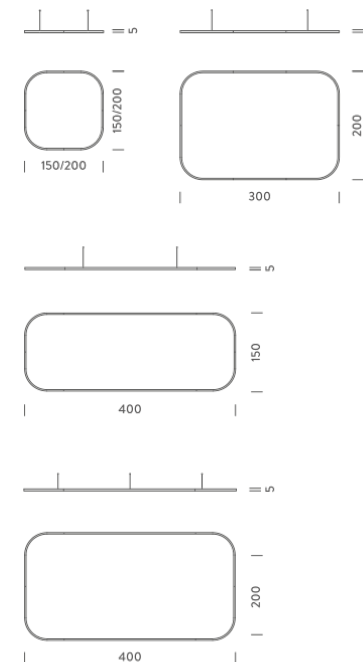

## 1,5X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	77W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	5214lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	Driver 100/305V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1606G15NBO  
BZRQ1606G15NNE  
BZRQ1606G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm

### Certificazioni

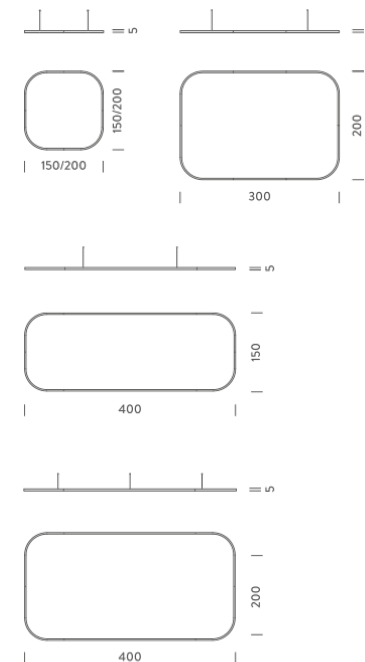

# 1,5X1,5M | UP - DOWNLIGHT - 4000K

## LAMPING

Source	Linear LED
Total power	154W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	10427lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	150x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

## Codes

BZRQ1712G15NBO  
BZRQ1712G15NNE  
BZRQ1712G15NOR


## Structure

white  
black  
gold

## PACKAGE

Package 01 Dimension: 210x110x15 cm

## Certificazioni

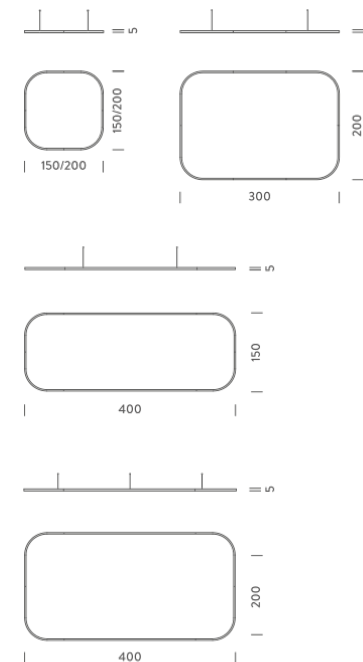

## 2X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	6098lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1608G15DBO  
BZRQ1608G15DNE  
BZRQ1608G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

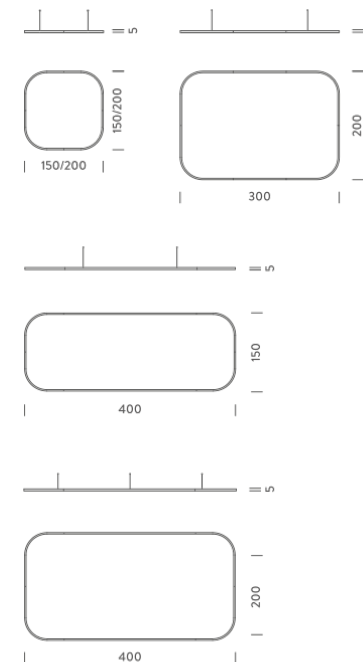



## 2X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	12195lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1716G15DBO  
BZRQ1716G15DNE  
BZRQ1716G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

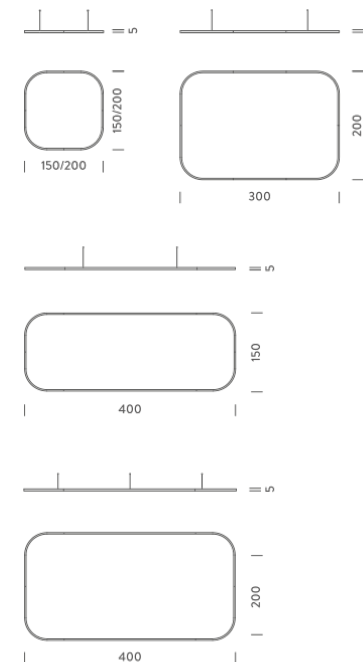

## 2X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	6456lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1608G15WBO  
BZRQ1608G15WNE  
BZRQ1608G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

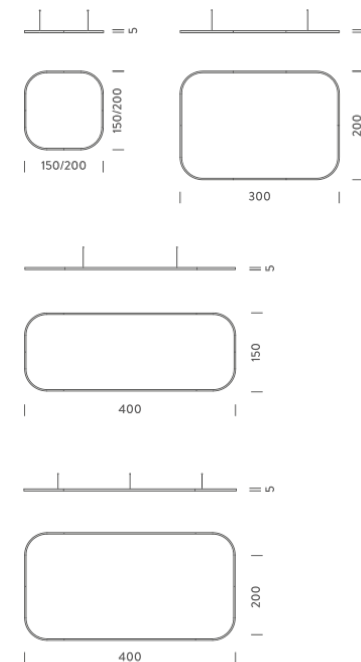

## 2X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	12912lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1716G15WBO  
BZRQ1716G15WNE  
BZRQ1716G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

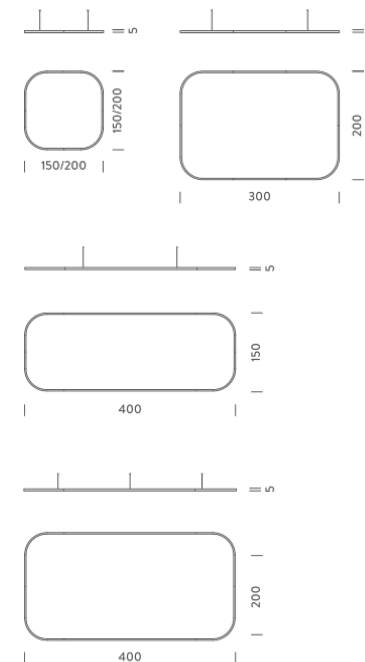

## 2X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	105W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	7174lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1608G15NBO  
BZRQ1608G15NNE  
BZRQ1608G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

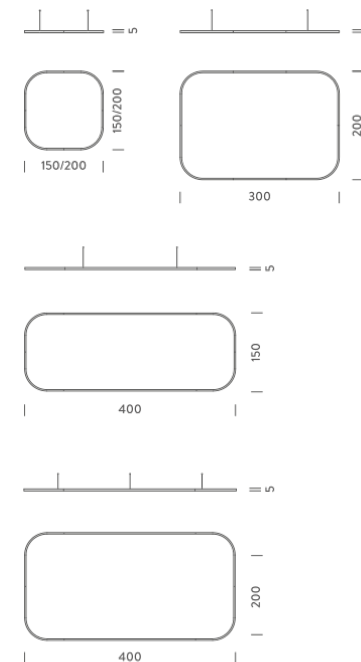

## 2X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	211W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	14347lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1716G15NBO  
BZRQ1716G15NNE  
BZRQ1716G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

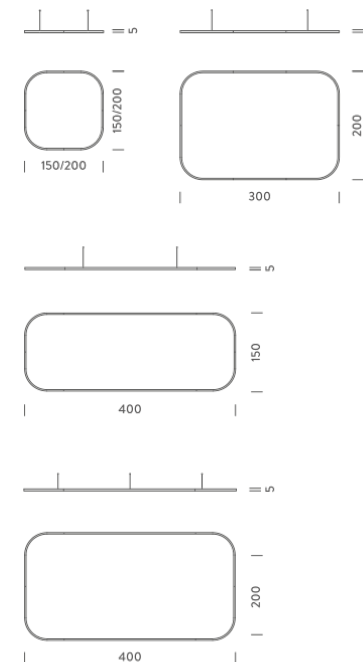

## 3X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	7764lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1610G15DBO  
BZRQ1610G15DNE  
BZRQ1610G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

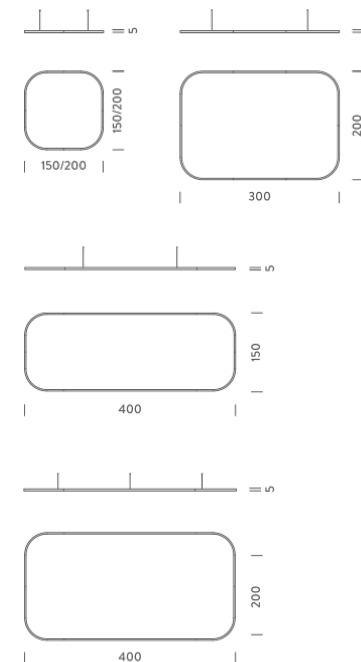

## 3X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	15527lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1720G15DBO  
BZRQ1720G15DNE  
BZRQ1720G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

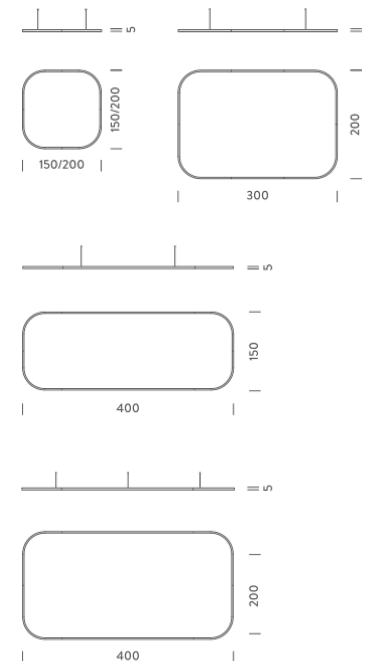

## 3X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	8220lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1610G15WBO  
BZRQ1610G15WNE  
BZRQ1610G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

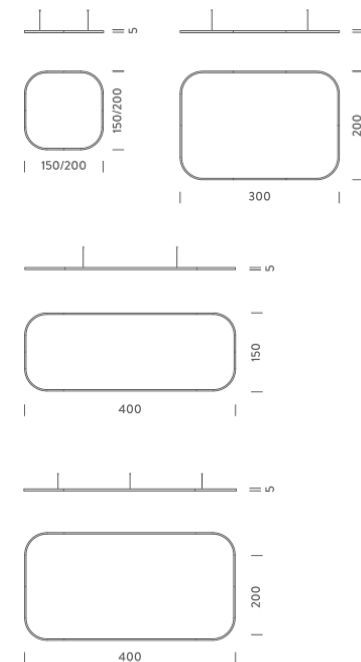



## 3X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	16440lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRQ1720G15WBO  
BZRQ1720G15WNE  
BZRQ1720G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

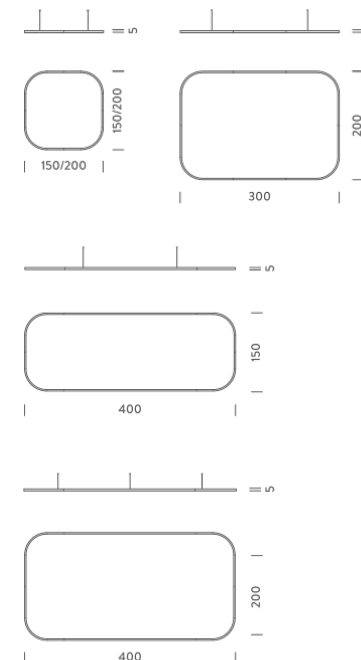

## 3X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	9134lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1610G15NBO  
BZRQ1610G15NNE  
BZRQ1610G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

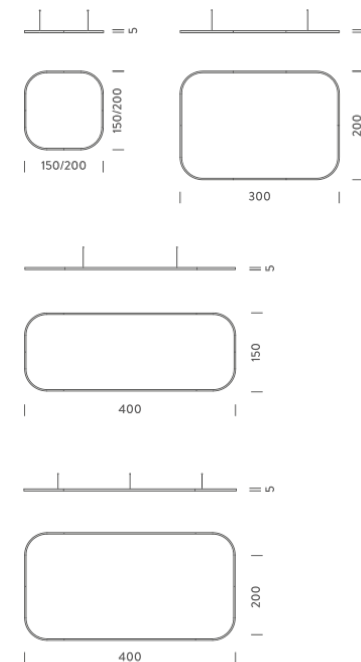

## 3X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	18267lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 2 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1720G15NBO  
BZRQ1720G15NNE  
BZRQ1720G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

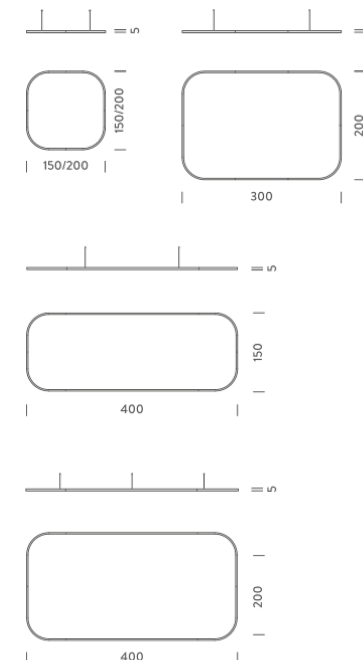

## 4X1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	8597lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1614G15DBO  
BZRQ1614G15DNE  
BZRQ1614G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

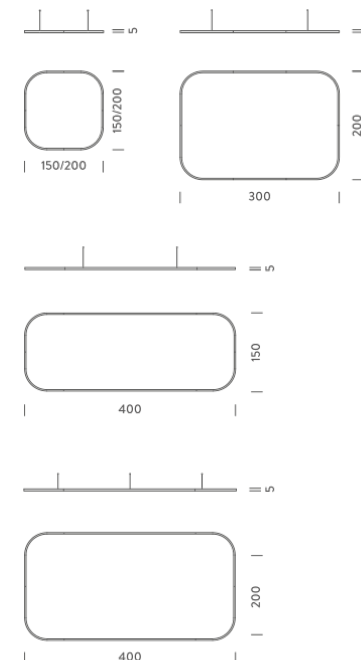

## 4X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	17193lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1728G15DBO  
BZRQ1728G15DNE  
BZRQ1728G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

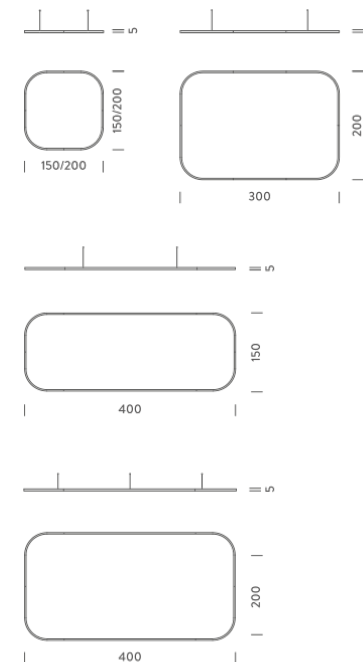

## 4X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	9102lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1614G15WBO  
BZRQ1614G15WNE  
BZRQ1614G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

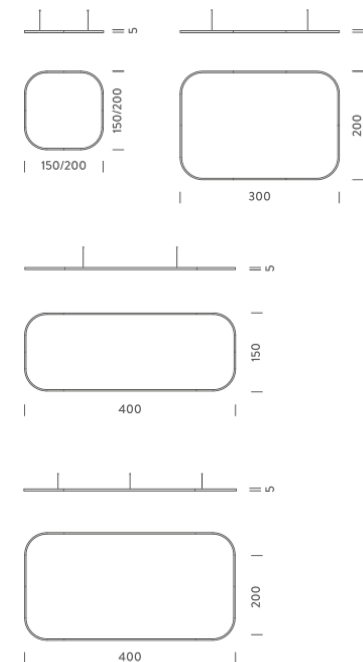

## 4X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	18204lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1728G15WBO  
BZRQ1728G15WNE  
BZRQ1728G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

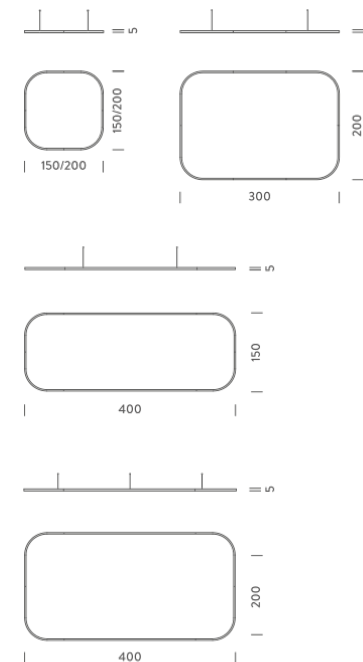

## 4X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	149W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	10114lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1614G15NBO  
BZRQ1614G15NNE  
BZRQ1614G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

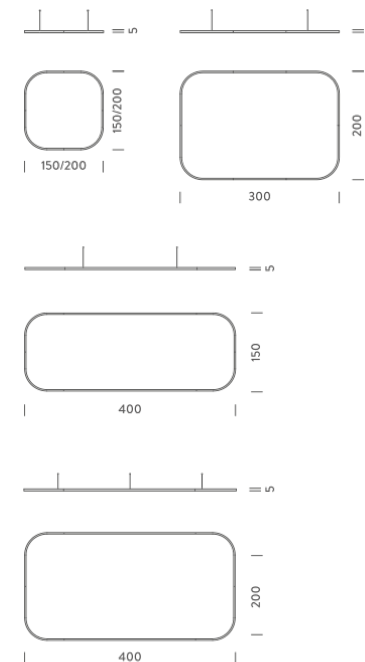



## 4X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	297W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	20227lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRQ1728G15NBO  
BZRQ1728G15NNE  
BZRQ1728G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

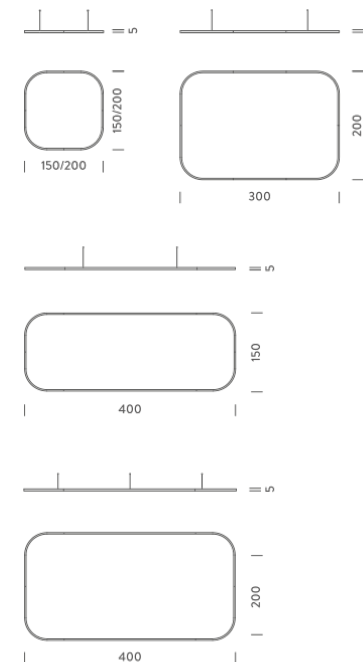

## 4X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	9430lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1612G15DBO  
BZRQ1612G15DNE  
BZRQ1612G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

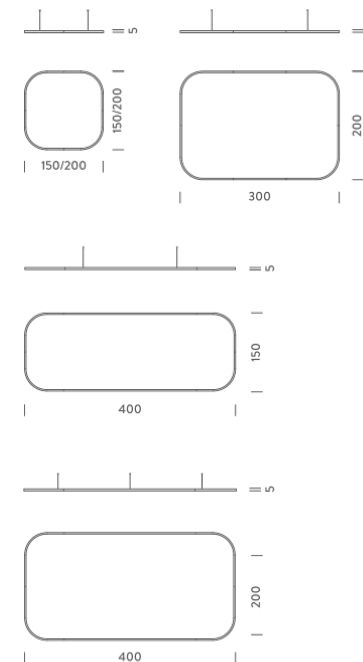

## 4X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	18859lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1724G15DBO  
BZRQ1724G15DNE  
BZRQ1724G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

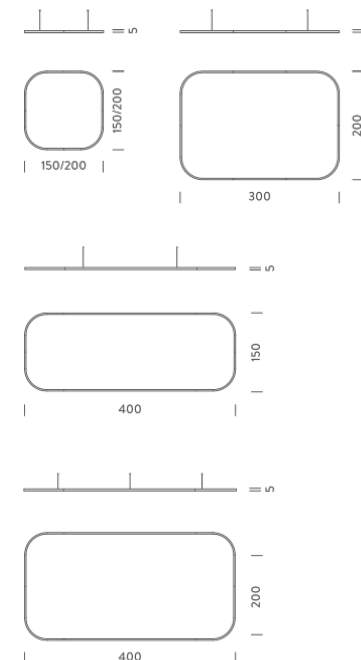

# 4X2M | DOWNLIGHT - 3000K

## LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	9984lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

## Codes

BZRQ1612G15WBO  
BZRQ1612G15WNE  
BZRQ1612G15WOR


## Structure

white  
black  
gold

## PACKAGE

Package 01 Dimension: 310x110x15 cm

## Certificazioni

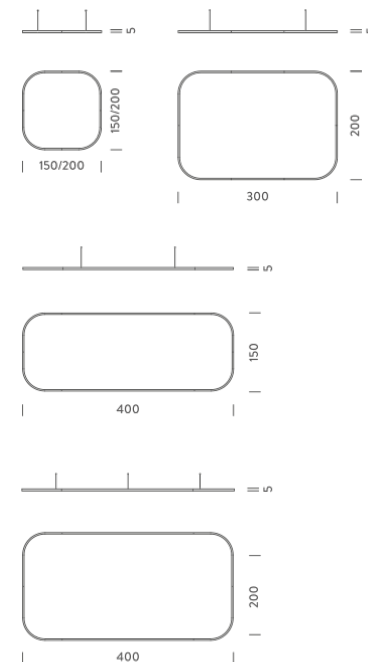

## 4X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	19968lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1724G15WBO  
BZRQ1724G15WNE  
BZRQ1724G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x110x15 cm

### Certificazioni

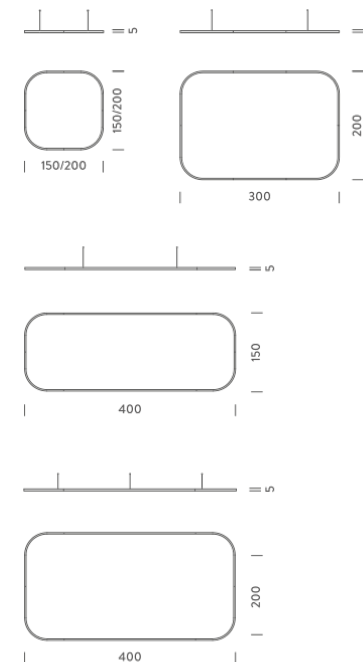

## 4X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	163W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	11094lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 arches
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRQ1612G15NBO

BZRQ1612G15NNE

BZRQ1612G15NOR

### Structure

white

black


gold

### PACKAGE

Package 01

Dimension: 310x110x15 cm

### Certificazioni

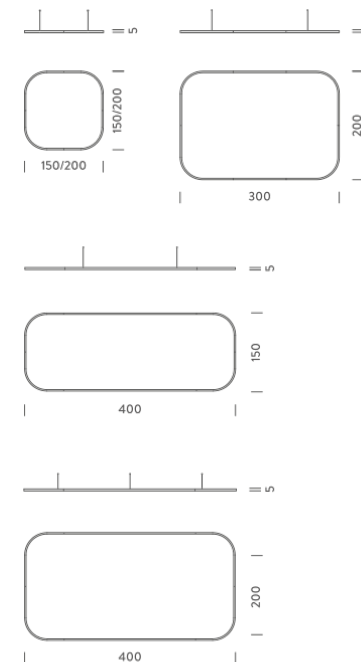

## 4X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	326W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	22187lm
Initial luminaire efficacy	35lm/W
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Ambient temperature range	0°C / 35°
Performance ambient temperature	25°

### Notes

Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 arches

### Customization options

Shapes, sizes

### Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

### Codes

BZRQ1724G15NBO

BZRQ1724G15NNE

BZRQ1724G15NOR

### Structure

white

black

gold

### PACKAGE

Package 01

Dimension: 110x110x10,3 cm / Gross weight: 4,6 kg

### Certificazioni

