Oxford Double Table & Floor Light US-FT554 / FT555

Instruction Manual

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. SUITABLE FOR DRY LOCATIONS ONLY

FR ATTENTION - RISQUE D'INCENDIE, RISQUE DE CHOC. POUR EMPLACEMENTS SECS SEULEMENT

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury.

- Ensure the lamp type and max wattage is followed- do not exceed. Take care not to overtighten
- Turn off and unplug fitting, leaving lamp to cool before changing lamp. Dispose of old lamps
- Never leave a fitting without a lamp in position.
- Keep light fitting away from combustible materials such as soft furnishings.
- the cable does not pose a trip hazard.
- If the electrical flex or electrical components become damaged at any point, the fitting must be unplugged from the power supply immediately and not operated until the damaged parts are fixed/replaced.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Bone china can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (non abrasive) if necessary. Switch off power to the fitting before cleaning.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes.

All products are hand-assembled in Oxford from high quality components, produced in the UK.







Table Light

US-FT620

Floor Light

US-FF630



Safety Instructions

Please retain for future reference. When fitting is in operation, some parts will become hot; take care when using/handling.

- Do not touch the lamp (bulb) or lamp holder while in operation, as both become very hot.
- Adjust light fitting only when power to the fitting is off and has been left to cool.

- Ensure children do not play with the light fitting.
- Ensure the light is positioned on a solid, level and non-slip surface and make sure the position of
- For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any

Oxford Double Table & Floor Light


120V ac 60Hz | IP20

US-FT620/BR - Oxford Double table light US-FF630/BR - Oxford Double floor light

LAMP GUIDANCE				
BASE	SHAPE	TYPE*		WATTAGE**
日 日 日 日 日 日 日 日	PAR16	HALOGEN LED	x	n/a 10W


- * Use LED lamps only. Warm white (2700k) recommended.
- ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

Contents

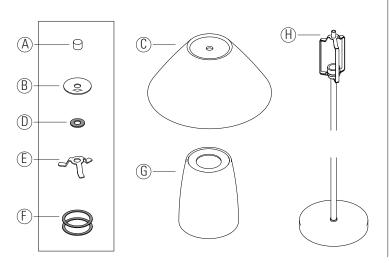

Contents

- A Finial
- B Disc
- C Conical shade
- D 20mm Rubber washer
- E Spacer
- F 47mm washer (x2)
- G Cylindrical shade
- H Lamp base

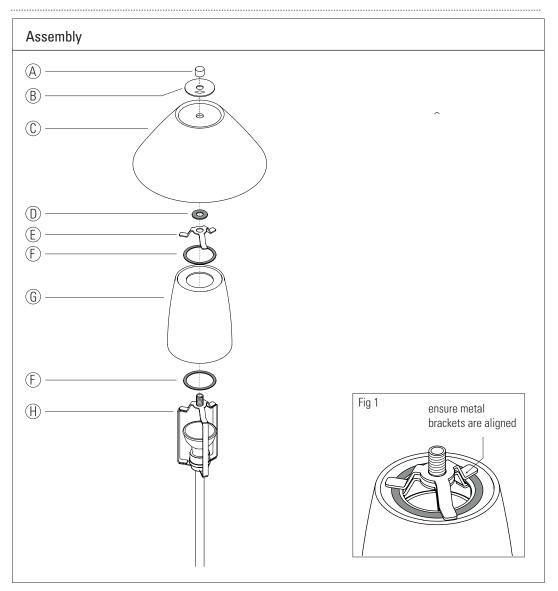

- With the bulb installed, place the first 47mm washer (F) on top of the shoulders shade carrier at the top of the lamp base.
- Place the cyclindrical shade on top of this.
- Place the second large washer (F) on top of the shade hole, and then place the spacer (E) on top of this, aligning the 3 legs with the legs of the shade holder underneath (see fig 1.)
- Put the small 20mm washer (D) over the threaded tube, onto the spacer.
- Place the conical shade (C) onto this, place the brass disc (B) on top (logo up) and fix in place with the finial (A).

Do not overtighten