



FRONT

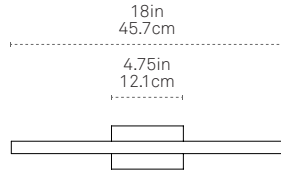

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE




□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-18IN-WAL

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

1.4 lbs / 0.6 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
94 Lumens / 94 CRI (3000K) /
3W Power draw

WOOD*

Maple	M A
American Walnut	W A
Ebonized Oak	E O
Heart Pine (Reclaimed)**	H P
Water Tower Redwood (Reclaimed)**	W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White	W H
Slate Grey	S G
Matte Black	M B

PREMIUM FINISH

Blackened	B L
Brushed Nickel	B N
Polished Nickel	P N
Brushed Brass	B B
Polished Brass	P B

* Custom finish options available upon approval.

COLOR TEMP

2400K	2 4 0 0
2700K	2 7 0 0
3000K (Standard)	3 0 0 0
4000K	4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)* **U N I**

* See dimming compatibility.

Remote Driver (not included)** **R E M**

** Direct-wall mounted option requires remote located driver. See driver recommendations.


LIGHT OUTPUT

Standard Brightness - 12V (Dimmable) **S B**

LIGHT DIRECTION


This fixture can be mounted in any orientation with light always facing the wall. See installation instructions.

FRONT

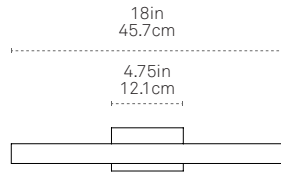

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE



□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-18IN-DIR

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

1.3 lbs / 0.6 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
106 Lumens / 94 CRI (3000K) /
3W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT


Standard Brightness - 12V (Dimmable)

S B

LIGHT DIRECTION

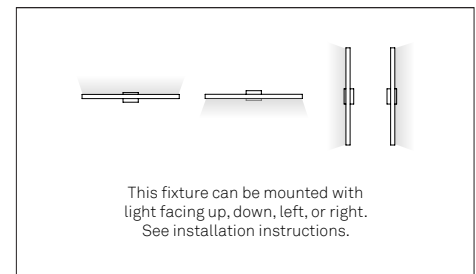


FRONT

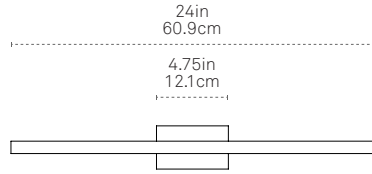

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE




□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-2FT-WAL

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

1.6 lbs / 0.7 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
130 Lumens / 94 CRI (3000K) /
4W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT


Standard Brightness - 12V (Dimmable)

S B

LIGHT DIRECTION

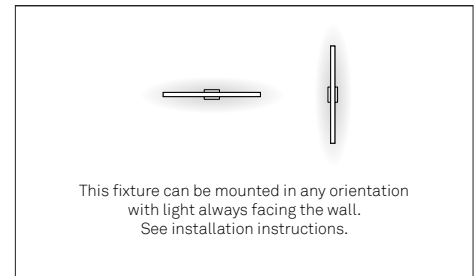


FRONT

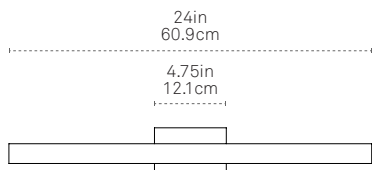

JUNCTION-BOX MOUNTED

- Requires Plate -

SIDE



□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.

See installation instructions.


FRONT



DIRECT-WALL MOUNTED

- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-2FT-DIR

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

1.5 lbs / 0.7 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
142 Lumens / 94 CRI (3000K) /
5W Power draw

WOOD*

- Maple M A
- American Walnut W A
- Ebonized Oak E O
- Heart Pine (Reclaimed)** H P
- Water Tower Redwood (Reclaimed)** W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

- POWDER COAT FINISH**
- White W H
 - Slate Grey S G
 - Matte Black M B

PREMIUM FINISH

- Blackened B L
- Brushed Nickel B N
- Polished Nickel P N
- Brushed Brass B B
- Polished Brass P B

* Custom finish options available upon approval.

COLOR TEMP

- 2400K 2 4 0 0
- 2700K 2 7 0 0
- 3000K (Standard) 3 0 0 0
- 4000K 4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)* U N I

* See dimming compatibility.


Remote Driver (not included)** R E M

** Direct-wall mounted option requires remote located driver. See driver recommendations.


LIGHT OUTPUT

Standard Brightness - 12V (Dimmable) S B

LIGHT DIRECTION

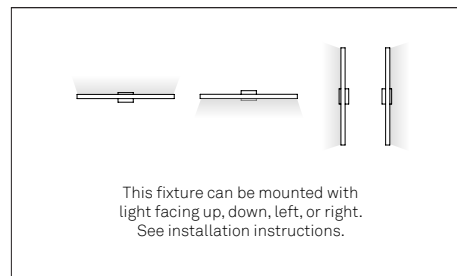


FRONT

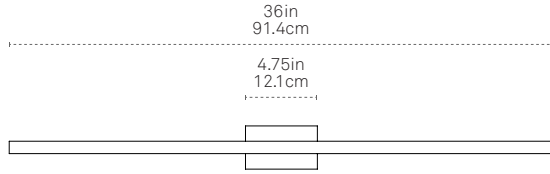

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE




□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-3FT-WAL

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

1.8 lbs / 0.8 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
201 Lumens / 94 CRI (3000K) /
6W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT


Standard Brightness - 12V (Dimmable)

S B

LIGHT DIRECTION

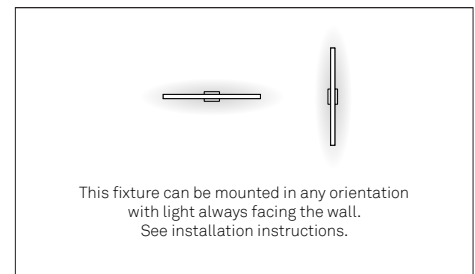


FRONT

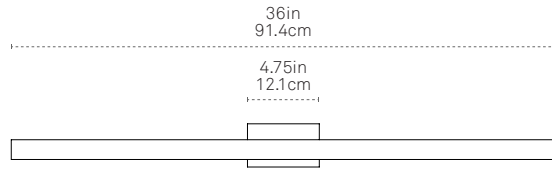

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE



□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-3FT-DIR

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

1.7 lbs / 0.8 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
213 Lumens / 94 CRI (3000K) /
7W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT


Standard Brightness - 12V (Dimmable)

S B

LIGHT DIRECTION

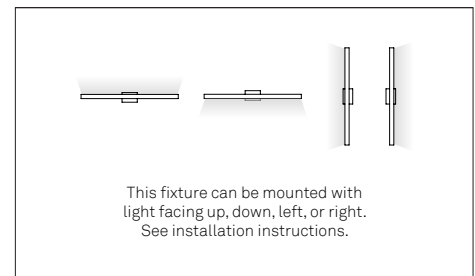


FRONT

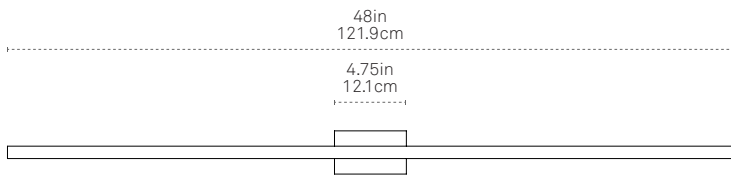

JUNCTION-BOX MOUNTED

- Requires Plate -

SIDE



□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.

See installation instructions.


FRONT



DIRECT-WALL MOUNTED

- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-4FT-WAL

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

2.3 lbs / 1 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
272 Lumens / 94 CRI (3000K) /
9W Power draw

WOOD*

Maple	M	A
American Walnut	W	A
Ebonized Oak	E	O
Heart Pine (Reclaimed)**	H	P
Water Tower Redwood (Reclaimed)**	W	T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH		
White	W	H
Slate Grey	S	G
Matte Black	M	B

PREMIUM FINISH

Blackened	B	L
Brushed Nickel	B	N
Polished Nickel	P	N
Brushed Brass	B	B
Polished Brass	P	B

* Custom finish options available upon approval.

COLOR TEMP

2400K	2	4	0	0
2700K	2	7	0	0
3000K (Standard)	3	0	0	0
4000K	4	0	0	0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)* **U****N****I**

* See dimming compatibility.


Remote Driver (not included)** **R****E****M**

** Direct-wall mounted option requires remote located driver. See driver recommendations.


LIGHT OUTPUT

Standard Brightness - 12V (Dimmable) **S****B**

LIGHT DIRECTION

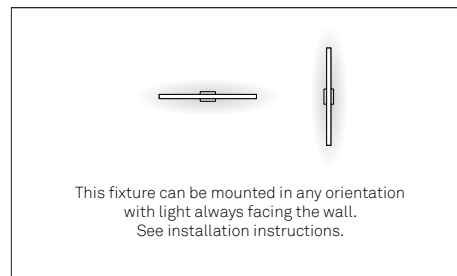


FRONT

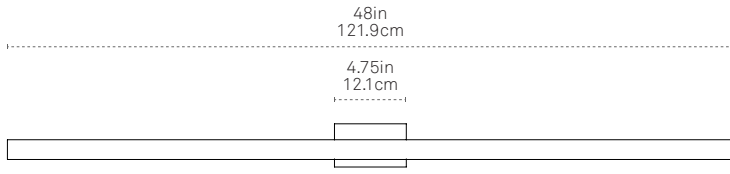

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE



□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-4FT-DIR

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

2.2 lbs / 1 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
283 Lumens / 94 CRI (3000K) /
9W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT


Standard Brightness - 12V (Dimmable)

S B

LIGHT DIRECTION

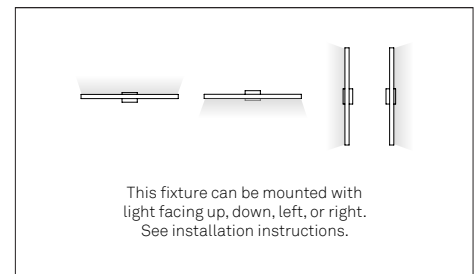


FRONT

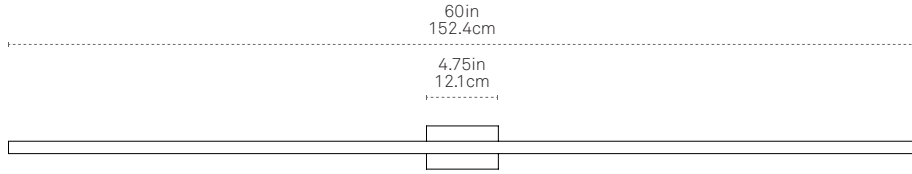

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE




□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-5FT-WAL

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

2.6 lbs / 1.2 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
360 Lumens / 94 CRI (3000K) /
12W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT


Standard Brightness - 12V (Dimmable)

S B

LIGHT DIRECTION

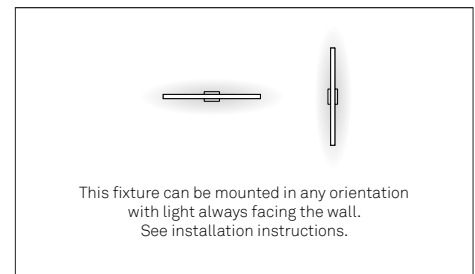


FRONT

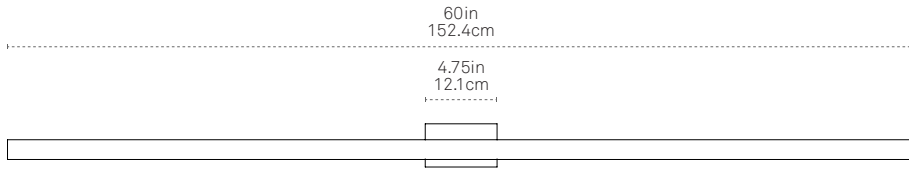

JUNCTION-BOX MOUNTED
- Requires Plate -

SIDE



□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

Universal Bracket mounts directly to a 2" x 4" **Switch Box** style junction-box. This mounting option requires Plate.


See installation instructions.

FRONT



DIRECT-WALL MOUNTED
- Remote driver ONLY -

SIDE



Universal Bracket mounts directly to a wall with or without Plate in remote driver applications only.

See installation instructions.

SPECIFY PRODUCT OPTIONS:

MODEL

RAY-SCNC-5FT-DIR

WOOD

--	--

METAL

--	--

COLOR TEMP

--	--	--	--

DRIVER

--	--	--

OUTPUT

--	--	--

DESIGN

© 2019

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

ADA Compliant
Fully Dimmable
Flexible mounting orientation

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

2.5 lbs / 1.1 kg

SHIPPING DIMENSIONS

Ships flat-packed in a corrugated cardboard box. Dimensions and weight TBD based on order quantity.

LIGHT SPECIFICATION

Standard Brightness LEDs :
360 Lumens / 94 CRI (3000K) /
12W Power draw

WOOD*

Maple

M A

American Walnut

W A

Ebonized Oak

E O

Heart Pine (Reclaimed)**

H P

Water Tower Redwood (Reclaimed)**

W T

* Custom wood options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

POWDER COAT FINISH

White

W H

Slate Grey

S G

Matte Black

M B

PREMIUM FINISH

Blackened

B L

Brushed Nickel

B N

Polished Nickel

P N

Brushed Brass

B B

Polished Brass

P B

* Custom finish options available upon approval.

COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

DRIVER & DIMMING OPTIONS

120V-277V (Universal dimming including 0-10V)*

U N I

* See dimming compatibility.

Remote Driver (not included)**

R E M


** Direct-wall mounted option requires remote located driver. See driver recommendations.

LIGHT OUTPUT

Standard Brightness - 12V (Dimmable)


S B

LIGHT DIRECTION

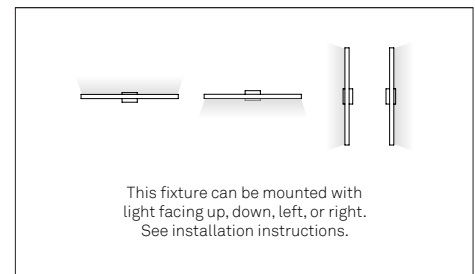

J-BOX MOUNTING (2"x4" SWITCHBOX)**

Driver inside J-Box + Requires Plate

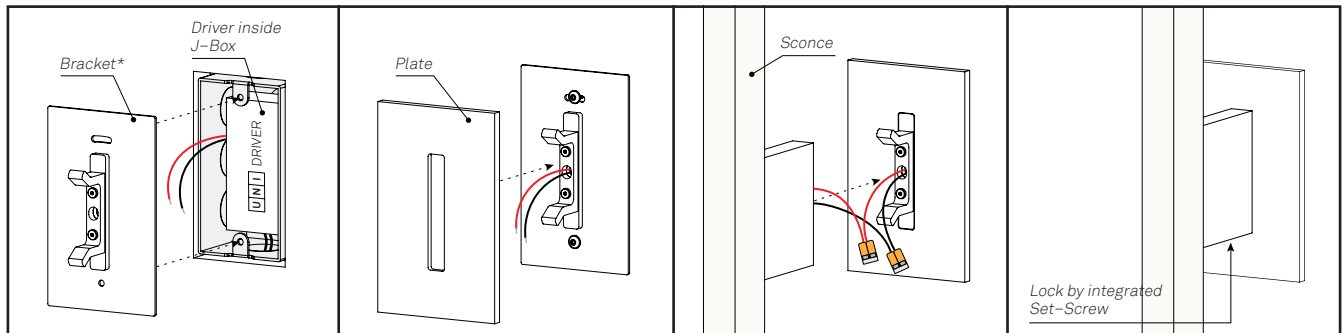


* Bracket designed to mount directly to a 2"x4" Switchbox style J-Box, which requires the Plate.

** 2"x4" Switchbox requires separate purchase and has to be pre-installed on site.

2"x4" Switchbox Adapter for 4"x4" J-Box

Ray Sconce can be mounted onto a 4"x4" J-Box using a Switchbox adapter.

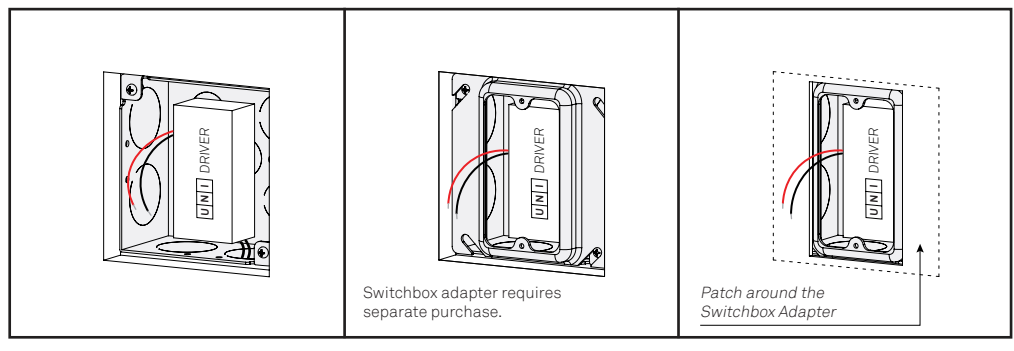


DIRECT WALL MOUNTING

Remote driver application only + Options to install With Plate or No Plate

No Plate Option – Overview

* Cleat (from the Bracket) mounts directly to the wall for No Plate installation option. Guideline Template will be provided for mounting Cleat.

** Wire hole size to drill for wires: Max $\varnothing 1/4"$ to ensure hole is covered by the Cleat

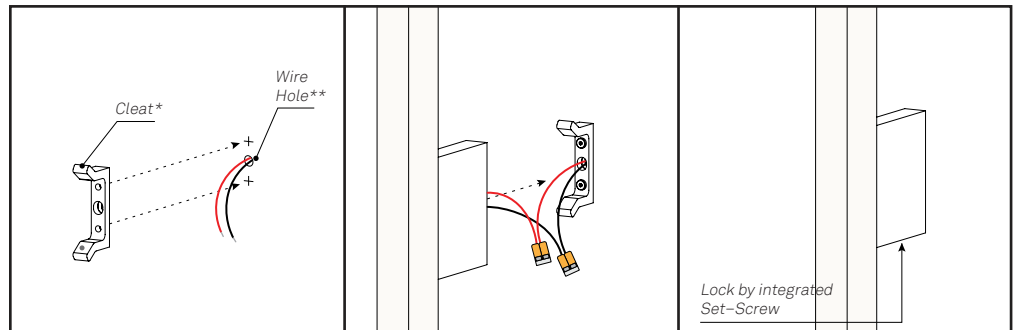

With Plate Option – Overview

* Bracket mounts directly to the wall for With Plate installation option. Guideline Template will be provided for mounting Bracket.

