




Project:	
Type:	
Description:	


## YORI LINEAR 48V

INDOOR - TRACK


### 48V TRACK




48V Recessed Trim




48V Recessed Trimless




48V High Recessed Trimless



48V Surface Slim



48V Surface/Pendant



48V High Surface/Pendant

### 48V - TRACK DOWNLIGHT ONLY

Example:

**A.50428.0012.LVXXXX**

**A.504**



**.LV**

**XXXX**

Track	Type	Finishes	Low Voltage	Length
A.504 48V	28 High Surface 29 <sup>°</sup> High Pendant 32 Recessed Trimless 35 High Recessed Trimless 39 Surface 40 <sup>°</sup> Pendant 43 <sup>°</sup> Recessed Trim 45 <sup>°</sup> Surface Slim	0012 White 0031 Black	LV Low Voltage	XXXX Exact length (in Inches)

NOTES

- 5. For pendant versions, must specify cable or rigid stem pendant accessories on last page
- 9. Longer lead time consult factory

### 48V - TRACK DOWNLIGHT AND UPLIGHT

Example:

**V.5373C.HW12.48XXXX**



**.537**



**C**



**.48**

**XXXX**

Dimming	Track	Type/Uplight Circuit	Uplight	CCT	4.2 W/LF	Finishes	Low Voltage	Length
V 0-10V D DALI 0 On/Off	.537 48V Uplight	3 Pendant, Single Circuit for Down/Up 4 Pendant, Separate Circuits for Down/Up 7 High Pendant, Single Circuit for Down/Up 8 High Pendant, Separate Circuits for Down/Up	C* Continuous	HW 2700K HQ 3000K WQ <sup>2</sup> 3500K HN 4000K	CRI >90 CRI >90 CRI >90 CRI >90	Im 548/LF Im 663/LF Im 690/LF Im 717/LF	12 White 31 Black	.48 48V XXXX Exact length (in Inches)

NOTES

- 2. For 3500K CCT, must consult with factory to confirm availability
- 6. Standard linear LED uplight runs continuously in track. Consult factory for optional 2' linear uplight installed in segments spaced in 1' increments on center.

### DRIVER

Example:

**0.FHM57.0000.48**

**0**

**.F**



**.0000**

**.48**

Control	Driver Location	Driver Code	Plate	Low Voltage
0 On/Off	F Remote Driver	60W 120/277V; On/Off driver to power track and LED uplight 96W 120/277V; On/Off driver to power track and LED uplight 320W 120/277V; On/Off driver to power track and LED uplight	.0000 No Plate	.48 48V

NOTES

- 7. Remote drivers to power track and uplight are on/off. All dimming drivers are located on-board track heads and uplights. For higher power drivers, consult factory for available options.
- 8. Total quantity of remote drivers is based on load requirements to be determined by track row and run lengths and quantity of track heads and uplights.

Project:	
Type:	
Description:	

## YORI LINEAR 48V

INDOOR - TRACK

### Technical Info

**Driver:**

Remote driver is required to power the 48V track.

**Optical features Light source features:**

1 LED/3step/50,000 hrs

**Beam angles:**

102°, 57/87°, 65°, 61°

**Physical features:**

**Material:** Acrylic

**Mounting:** Track

**Max Remote Driver Distance:**

60 Ft, 18 Ga

80 Ft, 16 Ga

100 Ft, 14 Ga

**Luminaire Description:**

**Fixture Features:** 48V low-voltage Yori Evo track system allows for minimal track profiles and clean aesthetic with no driver box on the track head.

**Fixture Benefits:** Part of the Yori family of lights assures consistent design.

**Track:** 48V recessed, surface, pendant.

**Track Accessories:** Please see following pages.

**Warranty:** 5 Year LED.


**ETL listed, Union assembled**

Reggiani reserves the right to change details at any time.


Rev 1/05/2021

## TECHNICAL DRAWINGS


Yori Linear 48V 11.3"




Yori Linear 48V 22.3"



Yori Linear 48V 33.3"

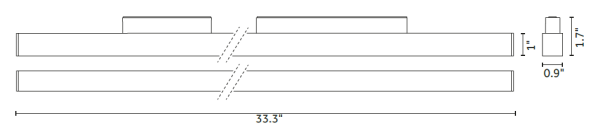


Yori Linear 48V 44.4"



**NOTE**

High recessed trimless or high surface/pendant track is recommended for linear fixtures to sit flush inside of track.

Yori Linear 48V 55.4"

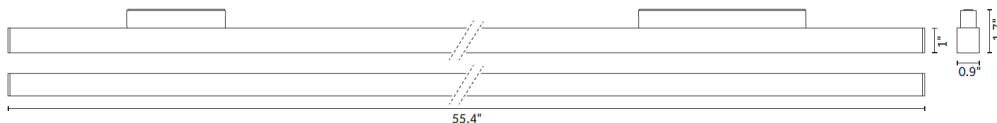


Project:	
Type:	
Description:	

## YORI LINEAR 48V


INDOOR - TRACK

### 48V TRACK


48V Recessed Trim




48V Recessed Trimless




48V High Recessed Trimless




48V Surface Slim



48V Surface/Pendant




48V High Surface/Pendant



### DRIVER


Medium Remote Box



**FOR USE WITH: MM54 60W Driver**

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation


Slim Remote Box



**FOR USE WITH: HM57 96W Driver**

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Extra Large Remote Box



**FOR USE WITH: WM61 320W Driver**









1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Project:	
Type:	
Description:	

## YORI LINEAR 48V

INDOOR - TRACK

### 48V TRACK ACCESSORIES

CONNECTOR ACCESSORIES			
	<b>Description:</b> L-Connector for Recessed Trim	<b>Code:</b> <b>0.02414.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for Recessed Trimless	<b>Code:</b> <b>0.02474.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for High Recessed Trimless	<b>Code:</b> <b>0.02478.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for Surface/Pendant	<b>Code:</b> <b>0.02449.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for High Surface/Pendant	<b>Code:</b> <b>0.02448.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
PENDANT ACCESSORIES			
	<b>Description:</b> 9' Long Cable Suspension Set, With Power, End of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVEP1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> 9' Long Cable Suspension Set, Non-Power, End of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVEN1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> 9' Long Cable Suspension Set, With Power, Middle of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVMP1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black

Project:	
Type:	
Description:	

## YORI LINEAR 48V

INDOOR - TRACK

### 48V TRACK ACCESSORIES

PENDANT ACCESSORIES			
	<p><b>Description:</b> 9' Long Cable Suspension Set, Non-Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMN1.00__C118</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, With Power, End of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVEP2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, Non-Power, End of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVEN2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, With Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMP2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, Non-Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMN2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>