



# Etat-des-Lieux 2A


## Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

### Your box should contain

1x  
Canopy  
feed box



1x  
Canopy  
box




2x Glass  
module  
with Flat  
cable.



### Tools needed, not included

- 2x 8-32 screws for junction box
- 5x wire connectors for junction box
- Screwdriver phillips and flat

- 1 Measure, mark and drill appropriate hole distance to mount backplate of canopy feed and canopy to ceiling. Install anchors if needed (not included)

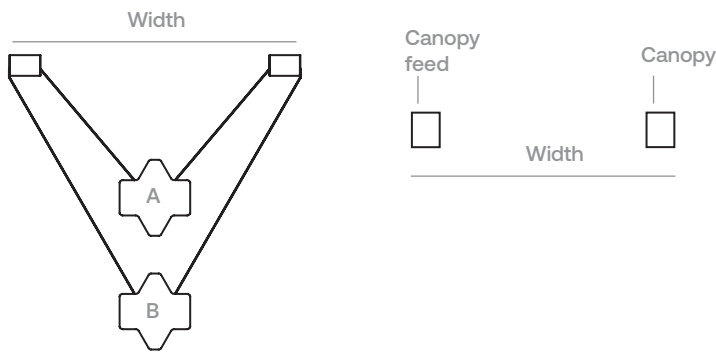


Model	Code	Length	Width	Depth
2A	B	89cm (35in)	64.7cm (25.5in)	28cm (11in)
	C	112cm (44in)	83.8cm (33in)	
	D	201cm (79in)	157.5cm (62in)	

\*The dimensions are calculated with an angle of 45 deg of strap.


- 2 Make appropriate connexions with wire bundle provided to ceiling wiring. (Shut off main power at the circuit breaker panel)

Ceiling wires	Fixture wires	For 0-10V dimming
Live	Black	Purple + 0-10Vdc+
Neutral	White	Grey - Dc -
Ground	Green	

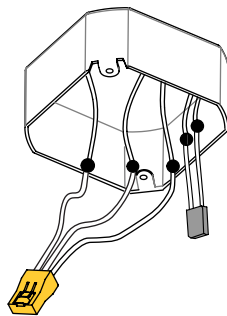



- 3 Screw backplate in junction box with screw 2x 8-32 machine screws (not included)

Make sure to install the backplate the side where the strain relief will meet the cable


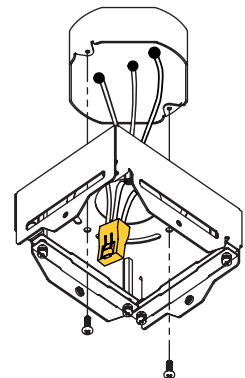


- 4 4.1 Clip wire connectors

4.2 install driver block with wing nuts provided (push connectors in junction box when installing).

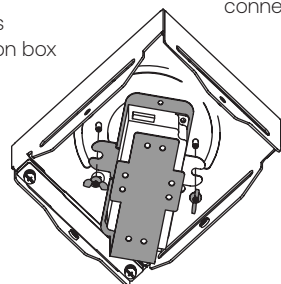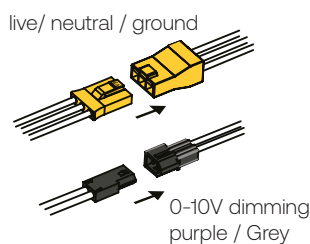

!!Do not connect loose domino connectors yet!!

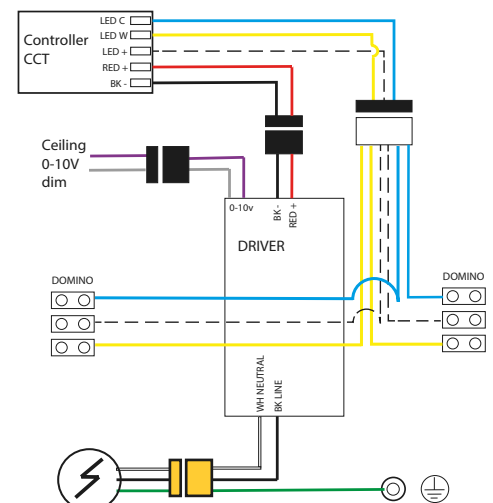


# Etat-des-Lieux 2A

## Assembly instructions




- 5** Fix non-feed canopy backplate on ceiling (screws not included)

Make sure to install the backplate the side where the strain relief will meet the cable



- 6** Install Module A first


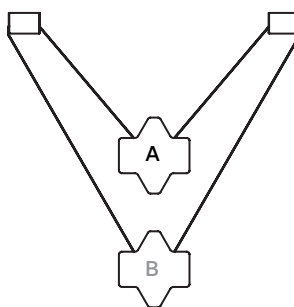


- 6** 6.1 Pass flat cable of module A in strain relief in canopy in direction of canopy feed and screw in place (Loosen captive screws for better passing of cable)

6.2 Screw on each side of cable to retain it in place.


6.3 You can adjust height of luminaire by pushing the cable in canopy.

Leveling can be done by making sure the cable is in line in strain relief

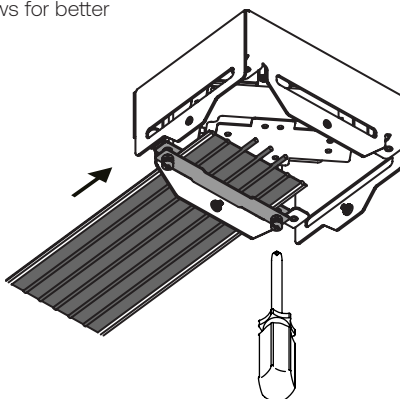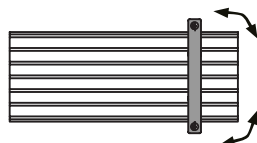


- 7** Install other side of module A in canopy feed, see step 6


- 8** Install module B, follow step 6

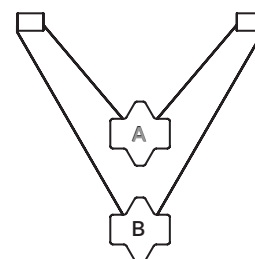


- 9** In canopy non-feed connect loose domino wires to each flat cable

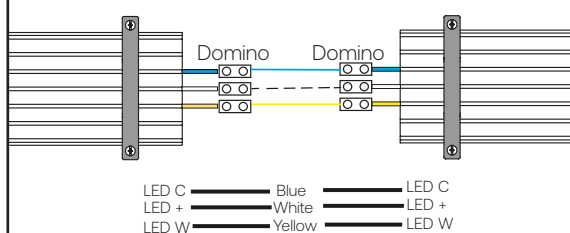

- 10** 10.1 Make connections with dominos and flat cables in canopy feed  
10.2 Clip white connectors together.

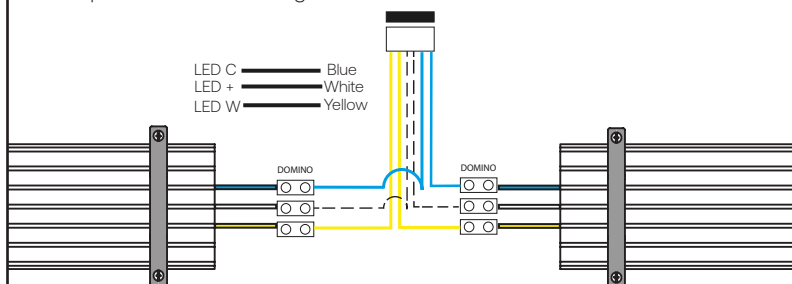

- 11** 11.1 Install canopy covers by sliding up and curving slightly the flat cable to pass the cover.

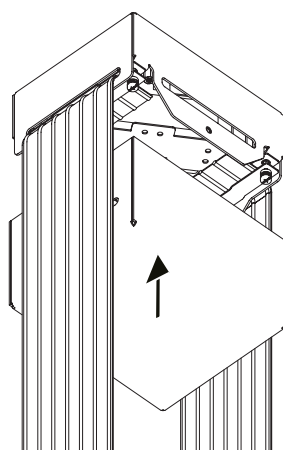

- 11.2 Screw in place with 2x flat screw provided. (Lift cable out of the way for better access)

