# Hublot 48”4SQ

Specification Sheet / 2023

PROJECT

TYPE

NOTES

**OVERVIEW**
Inspired by the illumination of the sunset through a ship's porthole, the vast and thin light source brings modernity without renouncing elegance. Hublot is made of very few delicate elements to bring lightness and simplicity. The light is evenly diffused across all surfaces to create a graceful ambiance without sacrificing functionality.

**MOUNTING**
Ceiling Pendant

**SOURCE**
Integrated LED module

**MATERIALS**
Powder-coated aluminum
Natural brass
Semi-synthetic cord
Frosted Acrylic
Stainless steel rope

**ENVIRONMENT**
Indoor - Dry location

**DIMMING**
Fully dimmable with TRIAC, ELV, and 0-10 V dimmers
See Dimming compatibility on page 3

**SPECIFICATIONS**

| | |
|---|---|
| Voltage | 120V-277V 50/60Hz |
| Power consumption | 38W |
| Color temperature | 3000K<br>2700K<br>More color temperature is available upon Request |
| Luminosity | 1880 lm (3000K) |
| Color rendering index | ≥90 CRI |
| Lifespan | 50K hour lifespan |
| Certifications | c UL us |

## Ordering Guide

| SKU | HU44SQ | | | | |
|---|---|---|---|---|---|

| MODEL | BODY COLOR | CORD COLOR | COLOR TEMPERATURE | OVERALL HEIGHT |
|---|---|---|---|---|
| **HU44SQ** Hublot 48"4SQ | **BK** Black | **BK** Black | **27** 2700K | **PR** As specified |
| | **WT** White | **WT** White | **30** 3000K | **xx** Custom*** |
| | **BW** Brass/White | **XX** Custom* | **xx** Custom** | |
| | **XX** Custom* | | | |

* Not all custom color are available. Please verify with your sales representative.

** Not all custom color temperatures are available. Please verify with your sales representative.

***Total height measured from ceiling to bottom of fixture.

Custom specifications must be indicated on the purchase order. The final price and feasibility must be confirmed.

## Dimensions

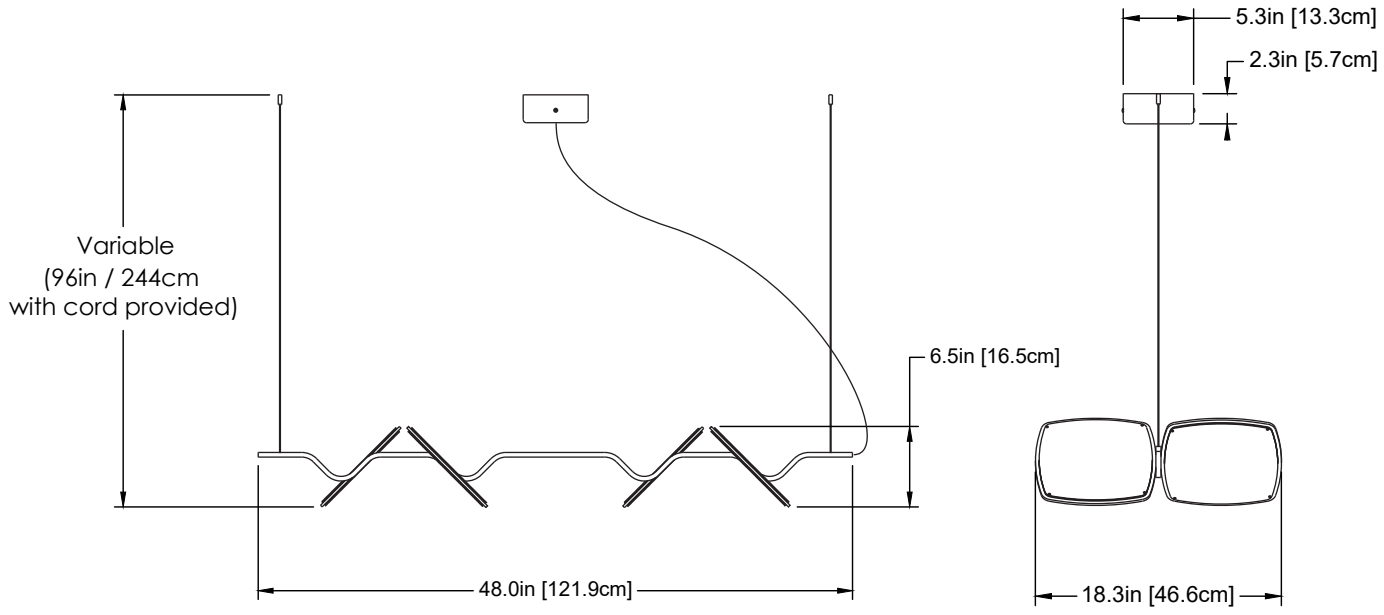

## TESTED DIMMER COMPATIBILITY

- Compatible with any 0-10V dimmer.

| LIST OF COMPATIBLE TRIAC AND ELV DIMMERS | | | |
|---|---|---|---|
| MANUFACTURER | MODEL | MAX DIMMING | MIN DIMMING |
| Leviton | IPI06-1LZ | 99% | 2% |
| Leviton | 6631-2 | 99% | 0% |
| Lutron | DVCL-153P | 98% | 1% |
| Lutron | TGCL-153P | 98% | 9% |
| Lutron | S600P | 98% | 4% |
| Leviton | VPE06 | 98% | 14% |
| Lutron | DVELV303P | 98% | 11% |
| Lutron | SELV300P | 98% | 11% |
| Leviton | 6683-IW | 97% | 8% |
| Leviton | 6633-P | 97% | 3% |
| Cooper | DLC03P | 98% | 4% |
| Lutron | LG600P | 98% | 9% |
| Cooper | SLC03P | 98% | 1% |
| Leviton | IPE04 | 99% | 10% |
| Lightolier | ZP260QEW | 98% | 11% |

## CLEANING INSTRUCTIONS

- Dust the luminaire regularly with a soft, dry cloth to remove any surface dirt and debris.
- For more thorough cleaning, use a damp cloth or sponge with a mild, non-abrasive soap or detergent. Do not use any harsh chemicals or abrasives that could damage the finish.
- Never use any solvents, citrus juice, vinegar, or other acidic or abrasive cleaning solutions on the luminaire, as these can damage the surface.
- For the textile braided cord, gently wipe it down with a damp cloth to remove any dust or dirt. Do not soak or immerse the cord in water, as this can cause damage.
- Avoid using any sharp or abrasive tools or scrubbing pads on the luminaire, as this can scratch or damage the finish.