


Mounting dimensions

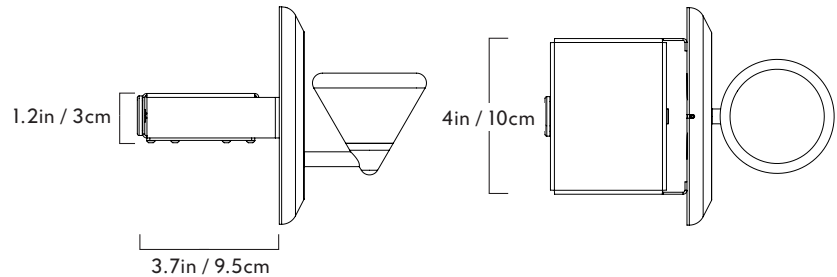

240V Driver Housing

Apollo

Series
Apollo

Product
Sconce

Dimensions
 $\Phi 2.8\text{in} / \Phi 7\text{cm} \times \text{D } 3.7\text{in} / 9.5\text{cm}$

Weight
0.9lb / 0.4kg

Materials
Brass, Steel, Glass, White Oak

Shipping Dimensions
L 22in / 56cm x W 16in / 41cm x
10in / 25cm

Shipping Weight
5lb / 2kg

Sconce

Finishes/Colors
Brushed brass metal / Oxidized oak
base

Driver location
120V: Driver to be installed in the wall
Electrical Box. Driver dimension are L
 $3.30\text{in} / 8.4\text{cm} \times \text{W } 1.57\text{in} / 4.0\text{cm} \times \text{H}$
 $0.99\text{in} / 2.5\text{cm}$
240V: Driver in the 240V Driver Hous-
ing. Housing to be installed in the wall.

Fixture Mounting
Designed to be mounted on standard 4
in. Electrical Box.
Two #8-32 screws included.
Additional mounting hardware provided
for 240V versions.

Certifications
UL/cUL (120V)
CE (240V)

Illumination
Integrated LED
Wattage: 8 W
Lumens: 500 Lumens est.
Color Temperature: 2700 K, 90+ CRI
LED Lifetime: 50,000 Hours est.

Dimming
120V: Triac, ELV or 0-10V
240V: ELV or 0-10V